



CUSTOMER NAME	客户名称:	
CUSTOMER NO.	客户编号:	
SERIES	系 列:	耳机插座
MODEL NO.	型 号:	XB-J35470
DRAWING NO.	图 形 号:	Audio socket

依据和存档之用，多谢合作！





APPROVE 接受			NOT APPROVE 不接受		
SIGNATURE 签署			STAMP 盖章		
DATE 日期					

PREPARED BY.制表人	CHECKED BY.校对	APPROVED BY.审核	APPROVAL BY. 批准
研发部 戴海明 2022. 06. 08	品质部 黄自清 2022. 06. 08	工程部 庞军 2022. 06. 08	总经办 吴量 2022. 06. 08

<http://www.alpsr.cn/> <http://www.alpsr.com/>

Quality core! Afterburner for Made in China!

ROHS

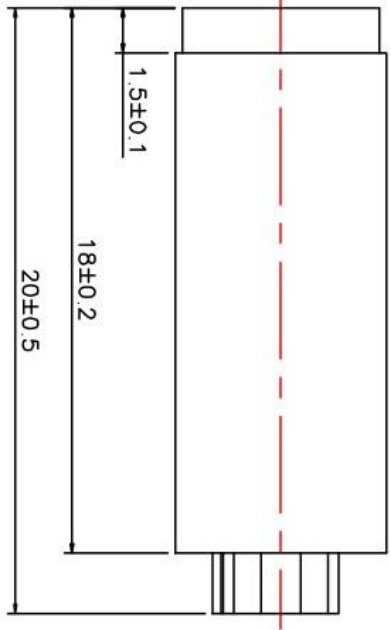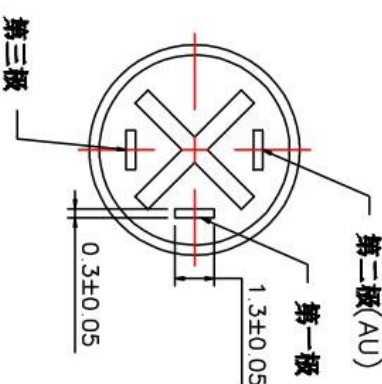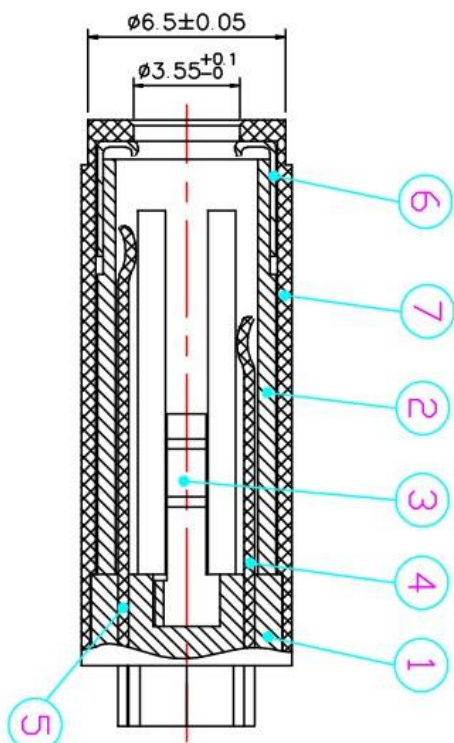

Technology Request:
1. Outlook: No hurt, no hurt.
2. Electronic performance:
a: Insulation resistance: Above DC500V/100M Ω ;
b: Endure voltage: AC500V at 1 minute;
c: Contact resistance: Under 3m Ω ;
3. Insertion force & withdrawal force: 0.3-3kgf;
4. Salt spray test: 24H;
5. Meet RoHS;
6. Remark * is important specification.

REV	修正纪录	修正后	签名	日期
VI.0	BEFORE REVISION	AFTER REVISION	June	20180917
	新规格			

单位	一般公差	7	8	9
mm	The general tolerance	CS3004	Ni 24um-6um	
比例	Scale	CS191	Ni 24um-6um	
视图	Third angle projection	CS191	Ni 24um-6um	
1	.xx: ±0.05	CS191	Ni 24um-6um	
2		CS191	Ni 24um-6um	
3		CS191	Ni 24um-6um	
4		CS191	Ni 24um-6um	
5		CS191	Ni 24um-6um	
6		CS191	Ni 24um-6um	
7		CS191	Ni 24um-6um	
8		CS191	Ni 24um-6um	
9		CS191	Ni 24um-6um	
10		CS191	Ni 24um-6um	
11		CS191	Ni 24um-6um	
12		CS191	Ni 24um-6um	
13		CS191	Ni 24um-6um	
14		CS191	Ni 24um-6um	
15		CS191	Ni 24um-6um	
16		CS191	Ni 24um-6um	
17		CS191	Ni 24um-6um	
18		CS191	Ni 24um-6um	
19		CS191	Ni 24um-6um	
20		CS191	Ni 24um-6um	
21		CS191	Ni 24um-6um	
22		CS191	Ni 24um-6um	
23		CS191	Ni 24um-6um	
24		CS191	Ni 24um-6um	
25		CS191	Ni 24um-6um	
26		CS191	Ni 24um-6um	
27		CS191	Ni 24um-6um	
28		CS191	Ni 24um-6um	
29		CS191	Ni 24um-6um	
30		CS191	Ni 24um-6um	
31		CS191	Ni 24um-6um	
32		CS191	Ni 24um-6um	
33		CS191	Ni 24um-6um	
34		CS191	Ni 24um-6um	
35		CS191	Ni 24um-6um	
36		CS191	Ni 24um-6um	
37		CS191	Ni 24um-6um	
38		CS191	Ni 24um-6um	
39		CS191	Ni 24um-6um	
40		CS191	Ni 24um-6um	
41		CS191	Ni 24um-6um	
42		CS191	Ni 24um-6um	
43		CS191	Ni 24um-6um	
44		CS191	Ni 24um-6um	
45		CS191	Ni 24um-6um	
46		CS191	Ni 24um-6um	
47		CS191	Ni 24um-6um	
48		CS191	Ni 24um-6um	
49		CS191	Ni 24um-6um	
50		CS191	Ni 24um-6um	
51		CS191	Ni 24um-6um	
52		CS191	Ni 24um-6um	
53		CS191	Ni 24um-6um	
54		CS191	Ni 24um-6um	
55		CS191	Ni 24um-6um	
56		CS191	Ni 24um-6um	
57		CS191	Ni 24um-6um	
58		CS191	Ni 24um-6um	
59		CS191	Ni 24um-6um	
60		CS191	Ni 24um-6um	
61		CS191	Ni 24um-6um	
62		CS191	Ni 24um-6um	
63		CS191	Ni 24um-6um	
64		CS191	Ni 24um-6um	
65		CS191	Ni 24um-6um	
66		CS191	Ni 24um-6um	
67		CS191	Ni 24um-6um	
68		CS191	Ni 24um-6um	
69		CS191	Ni 24um-6um	
70		CS191	Ni 24um-6um	
71		CS191	Ni 24um-6um	
72		CS191	Ni 24um-6um	
73		CS191	Ni 24um-6um	
74		CS191	Ni 24um-6um	
75		CS191	Ni 24um-6um	
76		CS191	Ni 24um-6um	
77		CS191	Ni 24um-6um	
78		CS191	Ni 24um-6um	
79		CS191	Ni 24um-6um	
80		CS191	Ni 24um-6um	
81		CS191	Ni 24um-6um	
82		CS191	Ni 24um-6um	
83		CS191	Ni 24um-6um	
84		CS191	Ni 24um-6um	
85		CS191	Ni 24um-6um	
86		CS191	Ni 24um-6um	
87		CS191	Ni 24um-6um	
88		CS191	Ni 24um-6um	
89		CS191	Ni 24um-6um	
90		CS191	Ni 24um-6um	
91		CS191	Ni 24um-6um	
92		CS191	Ni 24um-6um	
93		CS191	Ni 24um-6um	
94		CS191	Ni 24um-6um	
95		CS191	Ni 24um-6um	
96		CS191	Ni 24um-6um	
97		CS191	Ni 24um-6um	
98		CS191	Ni 24um-6um	
99		CS191	Ni 24um-6um	
100		CS191	Ni 24um-6um	

規 格 書

SPECIFICATION

SERIES 系列: **Audio socket (STEREO)**

MODEL NO. 型號: **XB-J35470**

1. RATING 額定值: **1A 12V DC**

2. CIRCUIT 回路:

3. TIMING 切換類型:


4. STANDARD TEST TEMPERATURE SHALL BE 5°C TO 35°C AND HUMIDITY SHALL BE 45% TO 85% .


溫度 5~35°C, 濕度 45~85% 標準狀態下測試。

5. OPERATING TEMPERATURE RANGE IS -20°C TO 70°C. IT IS USUALLY APPLIED TO ELECTRONIC AND ELECTRICAL APPLIANCE PRODUCTS.

溫度 -20°C~70°C 環境內使用。一般適用於電子、電氣方面產品使用。

ITEM 項目		TEST CONDITION 測試條件	PERFORMANCE 性能
6. ELECTRONICAL PERFORMANCE 電氣性能			
6.1	CONTACT RESISTANCE 接觸電阻	Being tested at 1 kHz small current and voltage (100mA,20mV) by contact resistance meter. 在 1kHz 小電流電壓 (100mA,20mV) 下測量。	100mΩ max. 100毫歐 以下。
6.2	INSULATION RESISTANCE 絕緣電阻	DC 500 V shall be applied for test between terminals and between terminals and frame for one minute. 在端子之間和端子與殼之間加 DC 500 V 條件下, 持續1分鐘測量。	100 MΩ min. 100兆歐 以上。
6.3	WITHSTAND VOLTAGE 耐電壓	AC 500 V and induction current 1 mA shall be applied for test between terminals and between terminals and frame for one minute. 在端子之間和端子與殼之間加 AC 500 V (50Hz或60Hz) 感應電流 1mA 條件下, 持續1分鐘測量。	There shall be no breakdown. 無擊穿現象出現。
7. MECHANICAL PERFORMANCE 機械性能			
7.1	INSERTION AND EXTRACTION FORCE 插入及拔出 力度	Insert plug into the jack and extract for test. then measure the insertion and extraction force. 用插頭插入和拔出插座, 測量插入和拔出的作用力。	Insertion force: 插入力度: 0.4~2.0kgf Extraction force: 拔出力度: 0.3~1.5kgf
7.2	TERMINAL STRENGTH 端子強度	A static force of 500 g being applied in one direction on the tip of the terminal for 1 minute. 一個 500 克之靜負荷施加於端子頂部的一個方向持續1分鐘。	There shall be no sign of mechanical and electrical damage. 無任何迹象顯示機械及電器性能之損壞。

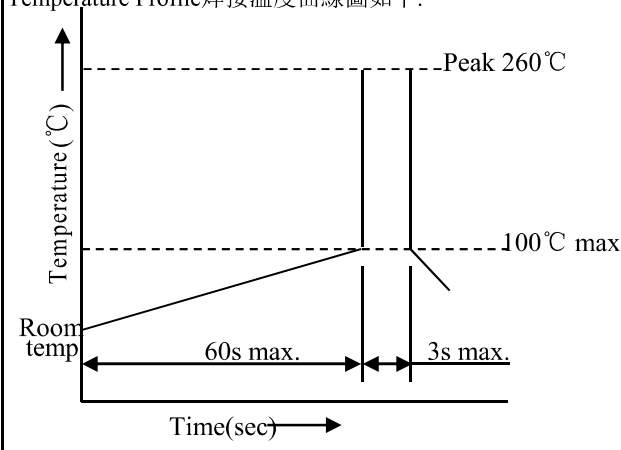ITEM 項目		TEST CONDITION 測試條件	PERFORMAENCE 性能
8. DURABILITY 耐久性			
8.1	SOLDERING TEST 可焊性試驗	The tip of the terminals shall be dipped 2 mm in the solder bath within temperature of $250\pm 5^{\circ}\text{C}$ for 3 seconds. 端子頂部被浸入焊錫池 2mm 深, 溫度$250\pm 5^{\circ}\text{C}$, 時間3秒。	Over 95% of the immersed surface was covered by tin. 浸入的部份95%以上表面將被錫覆蓋。
		The condition mentioned is temperature for lead-free soldering . 無鉛錫測試 Alloy: Sn 96.5% Cu 3% Ag 0.5% 成份: 錫 96.5% 銅 3% 銀 0.5%	
8.2	SOLDERING RESISTANT TEST 耐焊性試驗	Manual soldering temperature $300\pm 5^{\circ}\text{C}$, soldering time 3 ± 0.5 seconds, however excessive pressure shall not be applied to the terminal. 手焊接的時候溫度需控制在$300\pm 5^{\circ}\text{C}$, 時間為3 ± 0.5秒, 但不能在端子上施加異常壓力。	Without deformation of case or excessive looseness of teminals, meet mechanical and electrical properties 本體無變形, 能滿足於機械、電器性能。
		The condition mentioned is temperature for lead-free soldering . 無鉛錫測試。 Alloy: Sn 96.5% Cu 3% Ag 0.5% 成份: 錫 96.5% 銅 3% 銀 0.5%	
8.3	Wave soldering 波峰焊	When applying wave soldering, the peak temperature of the wave Oven should be set to 260°C max. 當使用低波爐進行焊接時, 最高溫度設置為260°C. ondition for soldering (Wave & Non-washable Type) Temperature Profile 焊接溫度曲線圖如下: 	
		There shall be no defects in appearance or in the mechanical functions. 沒有出現任何外觀和機械功能上的損傷。	
		Items	Condition
		Preheating temperature	Ambient temperature of the soldered surface of PC board 100°C max.
		Preheating time	60s max.
		Soldering temperature	260°C max.
		Continuous dipping time	3s max.
		Number of soldering	1 times max.

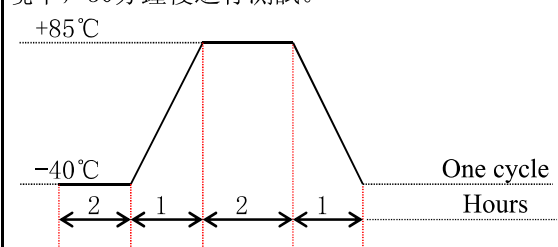ITEM 項目		TEST CONDITION 測試條件	PERFORMAENCE 性能
8.4	LIFE TEST 壽命試驗	5000 cycles of operation at a rate of 15-18 cycles per minute with unloading 無負載條件下，每分鐘 15-18 次的速度操作 5000 次。	(1) Contact resistance 150mΩ max. 接觸電阻150毫歐 以下 (2) Insertion force: 插入力度: 0.25~2.0kgf Extraction force: 拔出力度: 0.2~1.5kgf (3) ITEM 項目—6.2 (4) ITEM 項目—6.3
8.5	HEAT RESISTANT TEST 耐熱試驗	80±2℃ for 96 hours,test after keeping in normal condition for 30 minutes. 在 80±2℃ 環境中放96小時,再放在正常環境中30分鐘後進行測試。	(1) Contact resistance 150 mΩ max. 接觸電阻150毫歐以下 (2) Insulation resistance 50 MΩ min. 絕緣電阻50兆歐以上 (3) ITEM 項目—6.2 (4) ITEM 項目—6.3
8.6	MOISTURE RESISTANT TEST 耐濕試驗	40±2℃ 90-95% RH for 96 hours,test after keeping in normal condition for 30 minutes. 在40±2℃ 90-95% RH 環境中放96小時,再放在正常環境中,30分鐘後進行測試。	
8.7	COLD RESISTANT TEST 耐冷試驗	At -40±3℃ for 96 hours, test after keeping in normal condition for 30minutes. 在 -40±3℃ 環境中放96小時,再置於正常環境中,30分鐘後進行測試。	
8.8	TEMPERATURE CYCLING TEST 溫度交變試驗	According to following figure,after 5 cycles, test after keeping in normal condition for 30 minutes. 如圖示之環境中,循環5次後,再置於正常環境中,30分鐘後進行測試。 	
8.9	STORAGE ENVIROMENT 儲存環境	Under sealing pack condition,stored temperature don't exceed 30℃ and relative humidity is 75% RH; in the enviroment of no sunshine direct and no corrosive gas,the stored time ought to be three months but within six month at most. 密封包裝狀態下,儲存溫度為≤30℃,相對溫度 75% RH; 無陽光直射,無腐蝕性氣體的環境中,儲存時間為3個月,最長不宜超過6個月。 Without sealing pack condition,stored temperature don't exceed 30℃ and relative humidity is 75% RH; in the enviroment of no sunshine direct and no corrosive gas,the stored time shouldn't exceed 48H 無密封包裝狀態下,儲存溫度為≤30℃,相對溫度 75% RH; 無陽光直射,無腐蝕性氣體的環境中,儲存時間最長不宜超過48小時。 Don't excessive overlap or overstocking when keeping this goods,in case of damage. 保存時應注意物品不能過量重疊、積壓、以免損壞	