

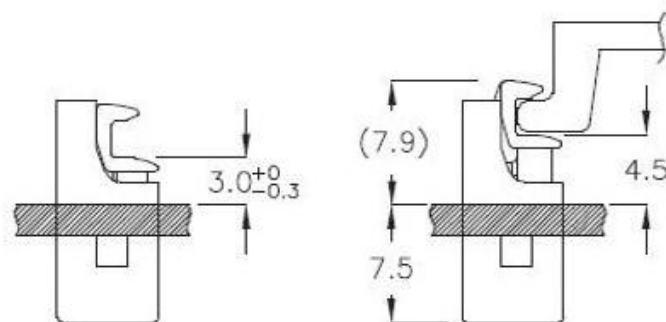



REVISION	A	RoHS
----------	---	------

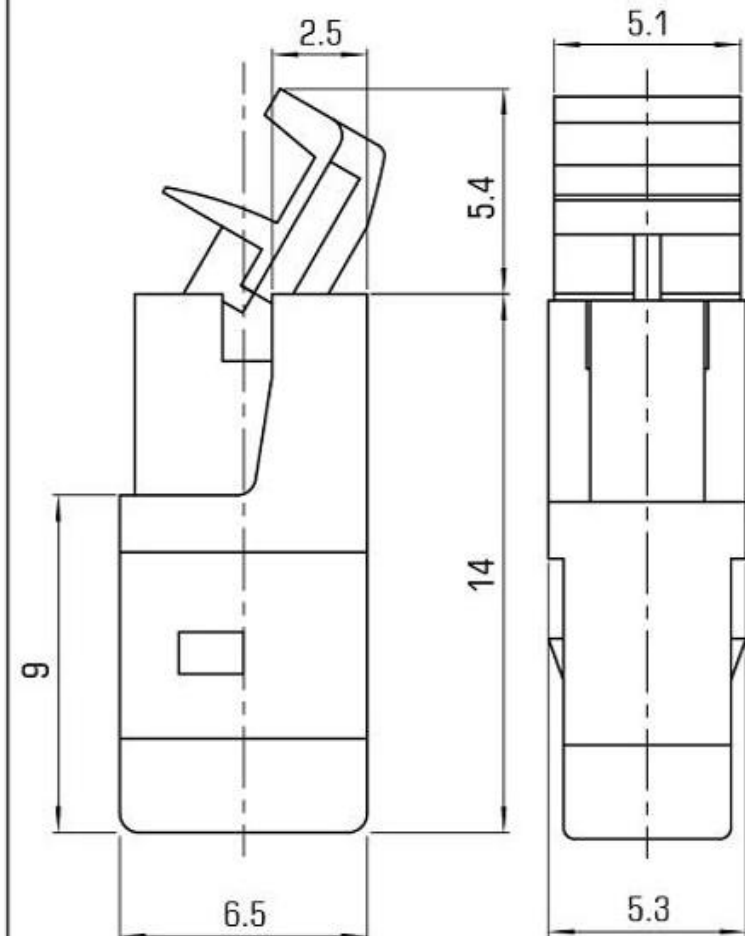

夾子欲下壓產生扣住功能時
行程距離卡板頂端衝程
3.0mm位?
Maximum Push-IN Position


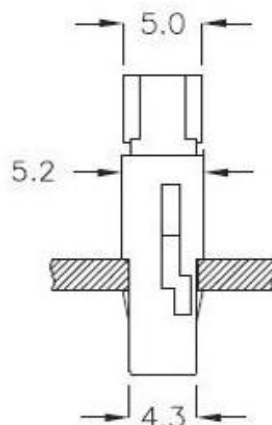


夾子扣住時
夾子頂端位置
距離卡板頂端
4.5mm
Close Position

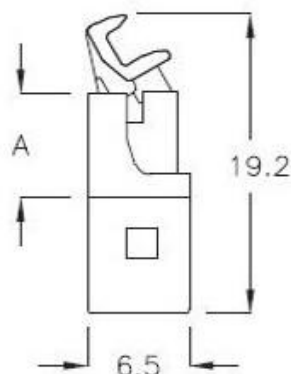

SYMB	REVISION	DATE	APVD.

HOLE IN CHASSIS:

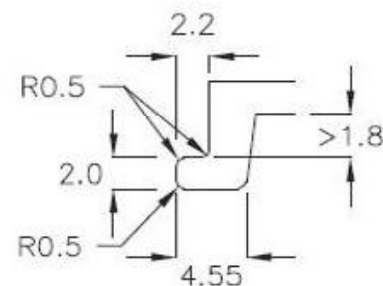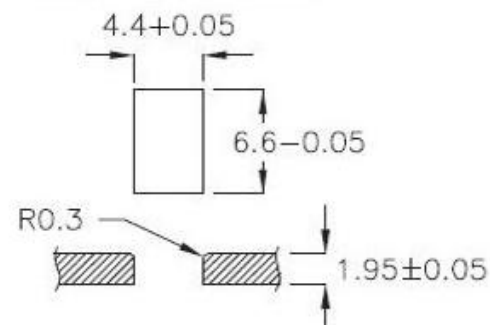

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED	8				
PART NO.		CHECKED		UP TO 5	± 0.2	7			
DRAW NO.	DL1	APPROVED		ABOVE 5 ~ 30	± 0.3	6			
SCALE: 2:1	UNIT: mm	DATE:		ABOVE 30 ~ 50	± 0.4	5			
				ABOVE 50	± 0.5	4			
				ANGLE	$\pm 3'$	3	SPRING	SUS	1 NI PLATED
						2	HOUSING	POM	1 BLACK
						1	SLIDER	PA12	1 BLACK
						NO.	PARTS	MATERIAL	QTY. FINISHING