

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/4/24
B		去除胶芯侧面槽位	DEYI		2012/11/29

NOTES :

1.0. RATING :

- 1.1. VOTAGE : 12 VAC (R.M.S.)
- 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
- 1.3. TEMPERATURE : -20°C TO +70°C

2.0. ELECTRICAL CHARACTERISTIC :

- 2.1. CONTACT RESISTANCE : 50 MILLIOHMS MAXIMUM INITIAL
- 2.2. INSULATION RESISTANCE : 100 MEGOHMS MINIMUM
- 2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL

3.0. MATERIALS :

- 3.1. CONTACT : COPPER ALLOY
- 3.2. HOUSING : THERMOPLASTIC, GLASS FILLED, 130°C, UL 94V-0 RATED
- 4.0. MECHANICAL :
 - 4.1. INSERTION FORCE(PER CONTACT): 300~3000 GRAMS
 - 4.2. WITHDRAWAL FORCE(PER CONTACT): 300~3000 GRAMS
 - 4.3. DURABILITY ,MINUMN: MATED 5000 TIMES WITHOUT DEGRADING
- 4.4. CONTACT FORCE, MINIMUM: 80 GRAMS


PRODUCT NO.

PJ06-04 A B 05-02
① ② ③ ④

PRODUCT SERIES:

- ① PJ06: PHONE JACK CONNECTOR H=4.5mm 斜口
- ② PIN NO. :
04: 4PIN
- ③ MATERIAL:
A: PA-9T
- ④ SERIES NO. :
02: 短型斜口

CUSTOMER DRAWING	XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.									
	DRAWING	DEYI	TITLE: 4.5h 4PIN短型斜口耳机座							
	APPROVED		P/N: XB-PJ06-04AB05-02							
	DATE	2016. 01. 13	DRAWING NO. XB-C-PJ06-02							
			UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1
			REV	A						

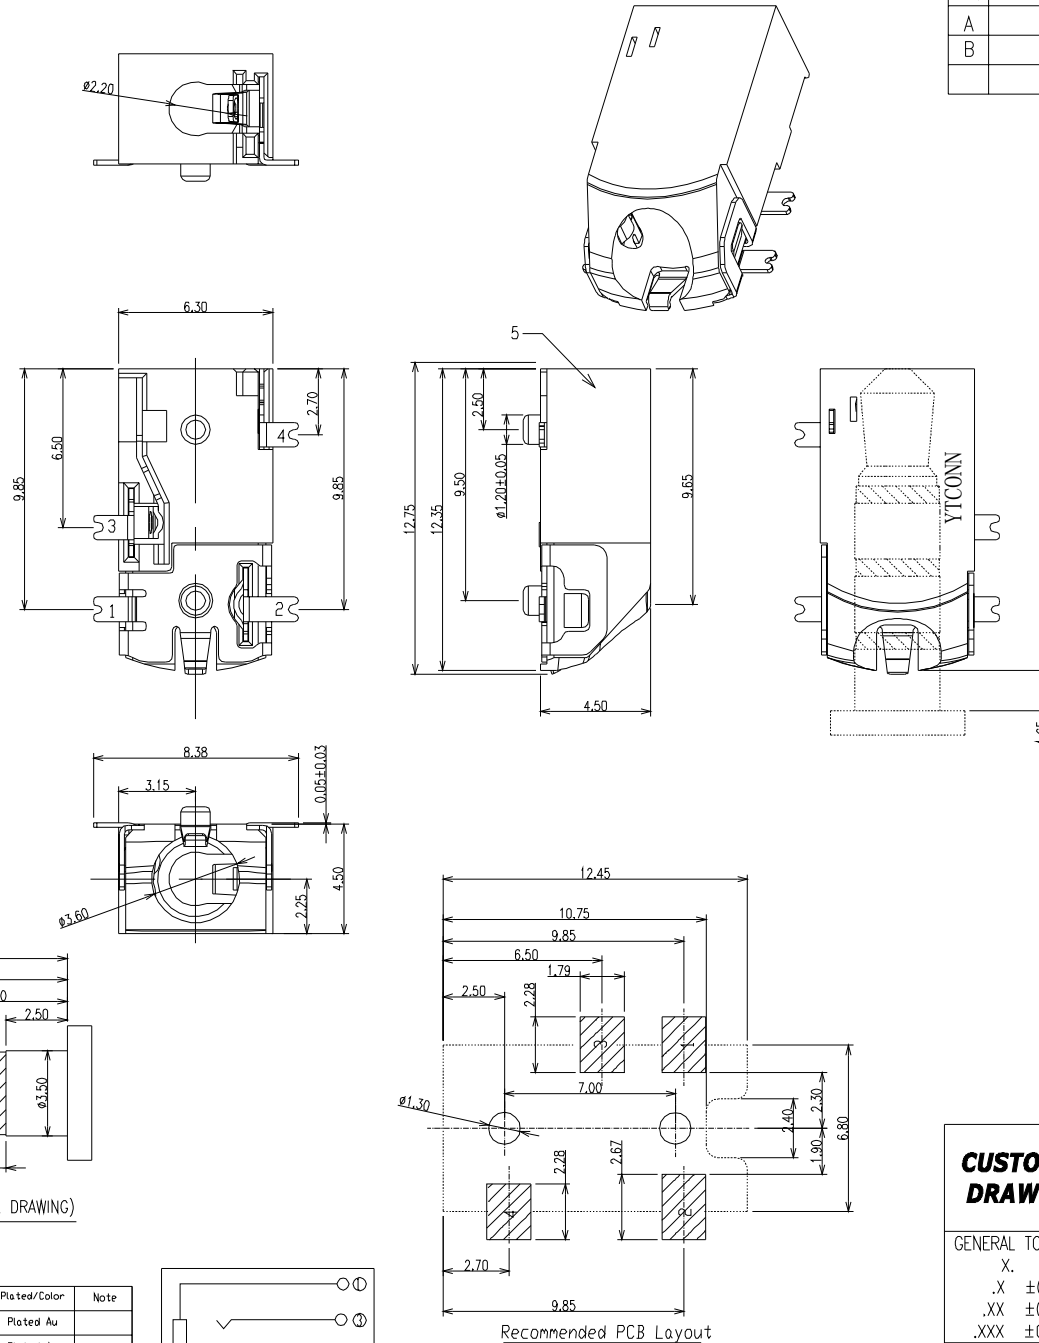

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

NO.	Part Name	QTY	Description	Plated/Color	Note
1	TERMINAL A	1	C5210R-H T=0.20mm	Plated Au	
2	TERMINAL B	1	C5210R-H T=0.20mm	Plated Au	
3	TERMINAL C	1	C5210R-H T=0.20mm	Plated Au	
4	TERMINAL D	1	C5210R-H T=0.20mm	Plated Au	
5	HOUSING	1	LCP+30ZGF/PA46+40%GF	Color: BLACK	(UL-94V-0)

