

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000 Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

PJ18-05 A B 03-08

① ② ③ ④

① PRODUCT SERIES:

PJ18: PHONE JACK CONNECTOR

② PIN NO. :






05: 5PIN

③ MATERIAL:


A: PA9T

④ SERIES NO. :


08: 反向沉板1.1H

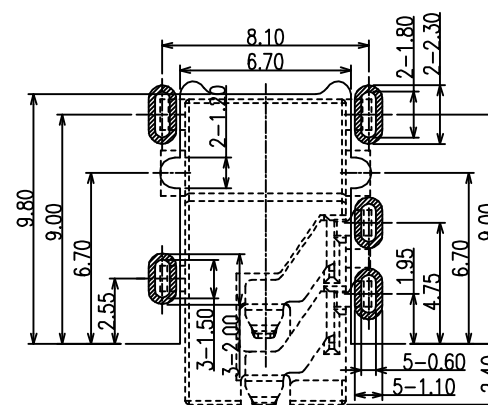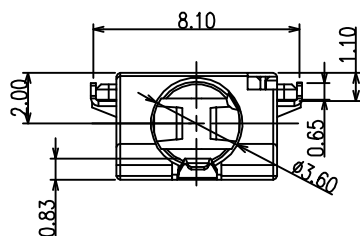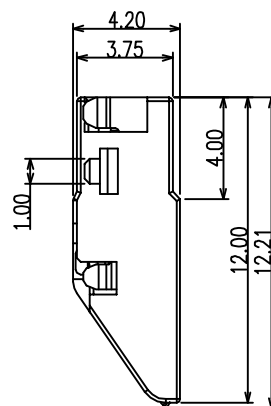

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE±0.05)

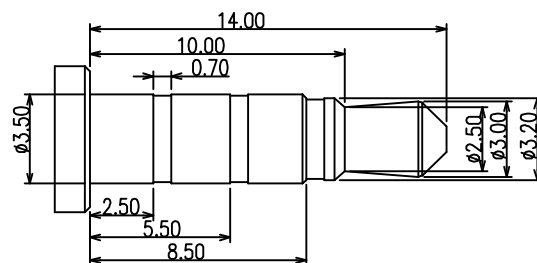

Ø3.50mm 4 POLE PLUG
DETAIL DRAWING(2:1)



CUSTOMER DRAWING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE

X.	
.X	± 0.20
.XX	± 0.15
.XXX	± 0.10

ANGEL TOLERANCE

X.	$\pm 3^\circ$
.XX	$\pm 2^\circ$
.XXX	$\pm 1^\circ$

DRAWING

DEYI

TITLE:	
--------	--

Ø3.50mm PHONE JACK CONNECTOR
TYPE2 反向沉板1.1H

APPROVED

P/N:	
------	--

XB-PJ18-05AB03-08

DATE _____

2018. 04. 30

	DRAWING NO.
--	-------------

XB-C-PJ18-08



UNIT	mm
------	----

LE	
----	--

1:1	
-----	--

E	A4
---	----

4	SHEET
---	-------

10

f1	
----	--

REV	
-----	--