


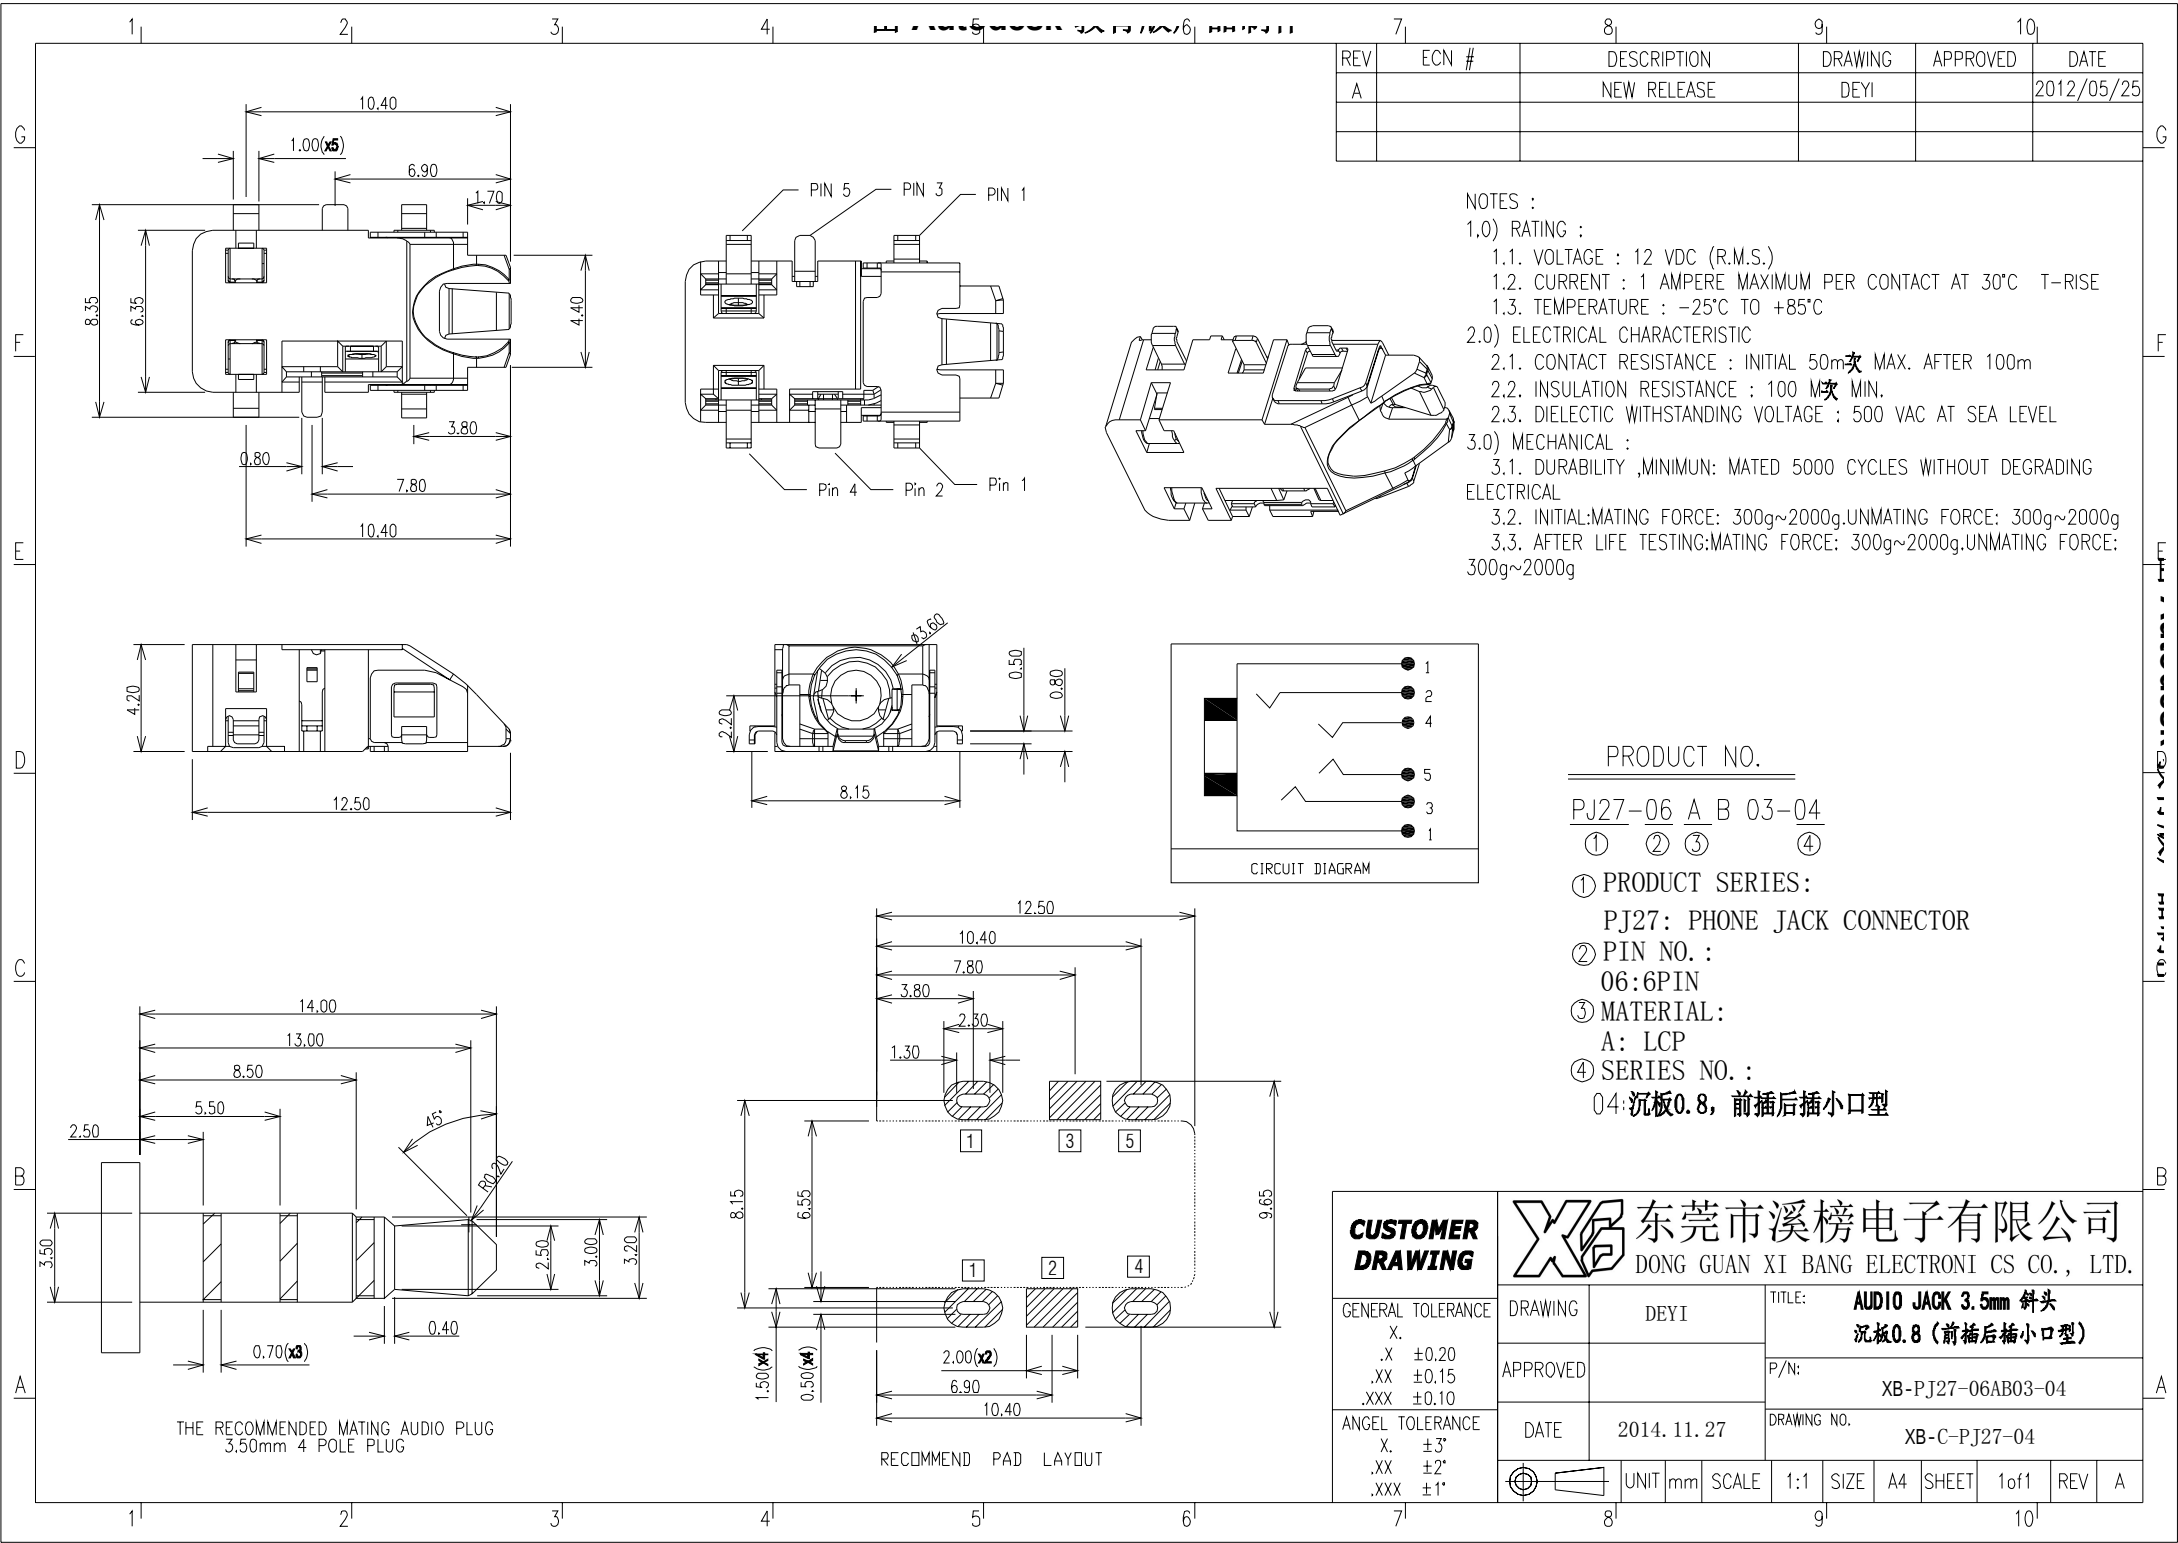

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/05/25

NOTES :

1.0) RATING :

1.1. VOLTAGE : 12 VDC (R.M.S.)

1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE

1.3. TEMPERATURE : -25°C TO +85°C

2.0) ELECTRICAL CHARACTERISTIC

2.1. CONTACT RESISTANCE : INITIAL 50m次 MAX. AFTER 100m

2.2. INSULATION RESISTANCE : 100 M次 MIN.

2.3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL

3.0) MECHANICAL :

3.1. DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING

ELECTRICAL

3.2. INITIAL:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g

3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g

PRODUCT NO.

PJ27-06 A B 03-04

① ② ③ ④

- ① PRODUCT SERIES:
- PJ27: PHONE JACK CONNECTOR
- ② PIN NO. :
- 06:6PIN
- ③ MATERIAL:
- A: LCP
- ④ SERIES NO. :
- 04:沉板0.8, 前插后插小口型

CUSTOMER DRAWING		XIB 东莞市溪榜电子有限公司		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
GENERAL TOLERANCE	DRAWING	DEYI	TITLE:	AUDIO JACK 3.5mm 斜头	
X. ±0.20	APPROVED		P/N:	XB-PJ27-06AB03-04	
.X ±0.15	DATE	2014. 11. 27	DRAWING NO.	XB-C-PJ27-04	
.XX ±0.10	UNIT	mm	SCALE	1:1	SIZE
ANGEL TOLERANCE					A4
X. ±3°					SHEET
.XX ±2°					1of1
.XXX ±1°					REV
					A