



NOTES :

1.0) RATING :

- 1.1. VOLTAGE : 12 VDC (R.M.S.)
- 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
- 1.3. TEMPERATURE : -25°C TO +85°C
- 0) ELECTRICAL CHARACTERISTIC
 - 2.1. CONTACT RESISTANCE : INITIAL 50mΩ MAX. AFTER 100m
 - 2.2. INSULATION RESISTANCE : 100 MΩ MIN.
 - 2.3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
- 0) MECHANICAL :
 - 3.1. DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL
 - 3.2. INITIAL:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g
 - 3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g.UNMATING FORCE: 300g~2000g

PRODUCT NO.

PJ35-05 A B 03-03
① ② ③ ④

① PRODUCT SERIES:
PJ35: PHONE JACK CONNECTOR

② PIN NO. :

05: 5PIN

③ MATERIAL:

A: PA-9T

④ SERIES NO. :

03:正向沉板2.3H



NO.	Part Name	QTY	Dscription	Plated/Color
1	1#端	1	C5210R-H T=0.20mm	Plated Au
2	2#端	1	C5210R-H T=0.20mm	Plated Au
3	3#端	1	C5210R-H T=0.20mm	Plated Au
4	4#端	1	SUS304 T=0.20mm	Plated Au
5	5#端	1	SUS304 T=0.20mm	Plated Au
6	HOUSING	1	PA9T	Color: BLACK

CUSTOMER DRAWING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE

X.	
.X	±0.20
.XX	±0.15
.XXX	±0.10

ANGEL TOLERANCE

X.	$\pm 3^{\circ}$
.XX	$\pm 2^{\circ}$
.XXX	$\pm 1^{\circ}$

DRAWING

Bull 1

TITLE: H3.6 PHONE JACK
正沉2.3MM (DIP TYPE)

P/N:	XB-PJ35-05AB03-03
------	-------------------

DRAWING NO.	XB-C-PJ35-03
-------------	--------------

Technical drawing of a part with a hole and a tapered section. The drawing shows a cross-section of a cylindrical part with a central hole. The hole has a diameter of 10 mm. The part has a total length of 40 mm. The right end of the part is tapered, with a diameter of 15 mm at the base and a diameter of 10 mm at the top. The drawing is labeled with dimensions: 10, 40, and 15.

UNIT	mm
------	----

SCALE

1:1

	SIZE
--	------

ZE	A
----	---

4	SHEE
---	------




1c	
----	--

of2	
-----	--


REV	
-----	--

□ Packing Notes:

1. Reel : 1200pcs/ Reel.
2. Carton : 13200pcs/ 11 Reel/ Carton.

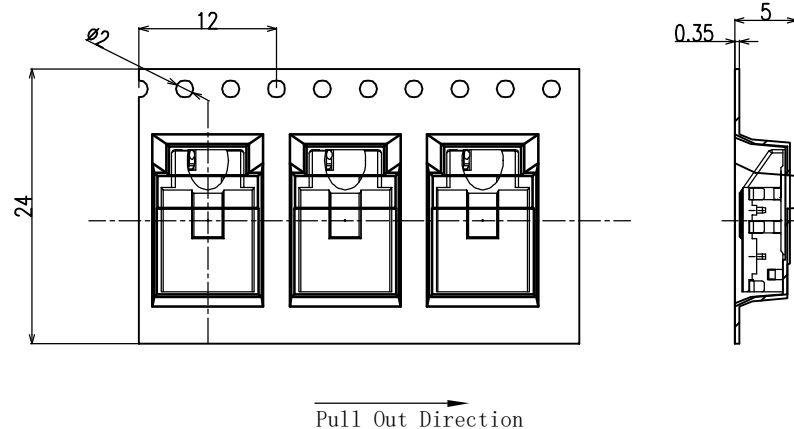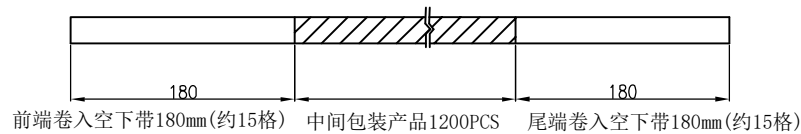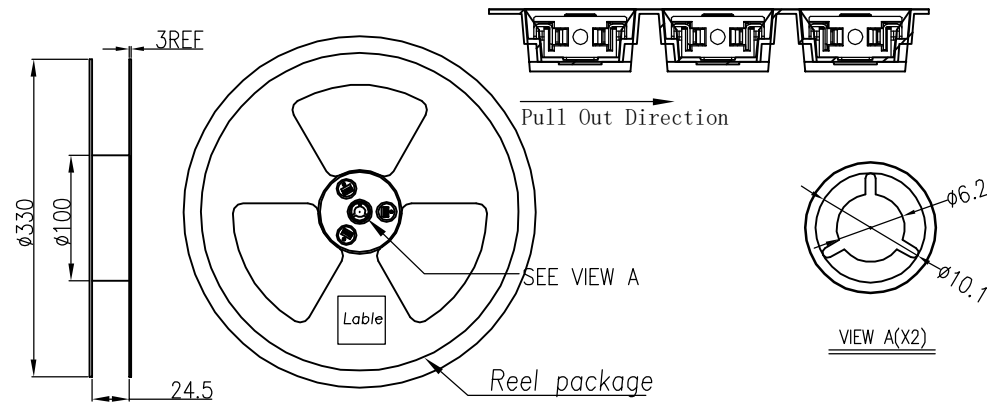


- 1) 用TAPE将纸箱封实.
- 2) 将标签贴于纸箱侧 麦上方.

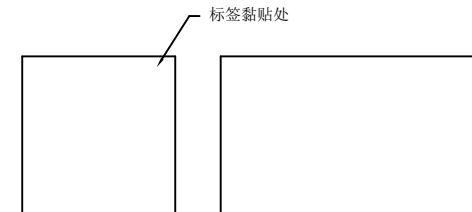

备 注 (REMARK)

- 1). 若有未装满之零数箱, 必须以缓冲材塞满.
- 2). 在搬运过程中要轻拿轻放.
- 3). 在运输中不可堆放过多, 不可有重压现象.
- 4). 上带在黏贴下带时必须平整, 且黏贴处不要出现气泡.

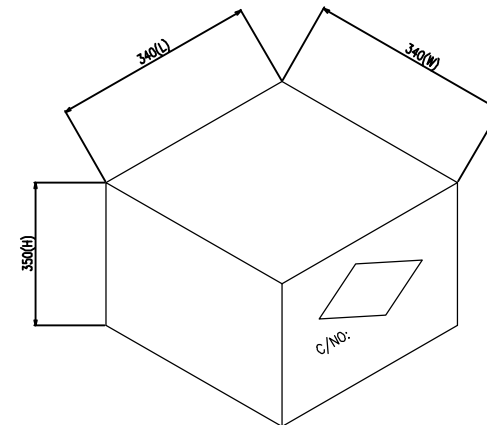

**CUSTOMER
DRAWING**



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE X. ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	Bull	TITLE:	H3.6 PHONE JACK 正沉2.3MM (DIP TYPE) 包装图
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	APPROVED		P/N:	XB-PJ35-05AB03-03
	DATE	2019.09.27	DRAWING NO.	XB-C-PJ35-03
	UNIT	mm	SCALE	1:1
	SIZE	A4	SHEET	2of2
	REV	B		