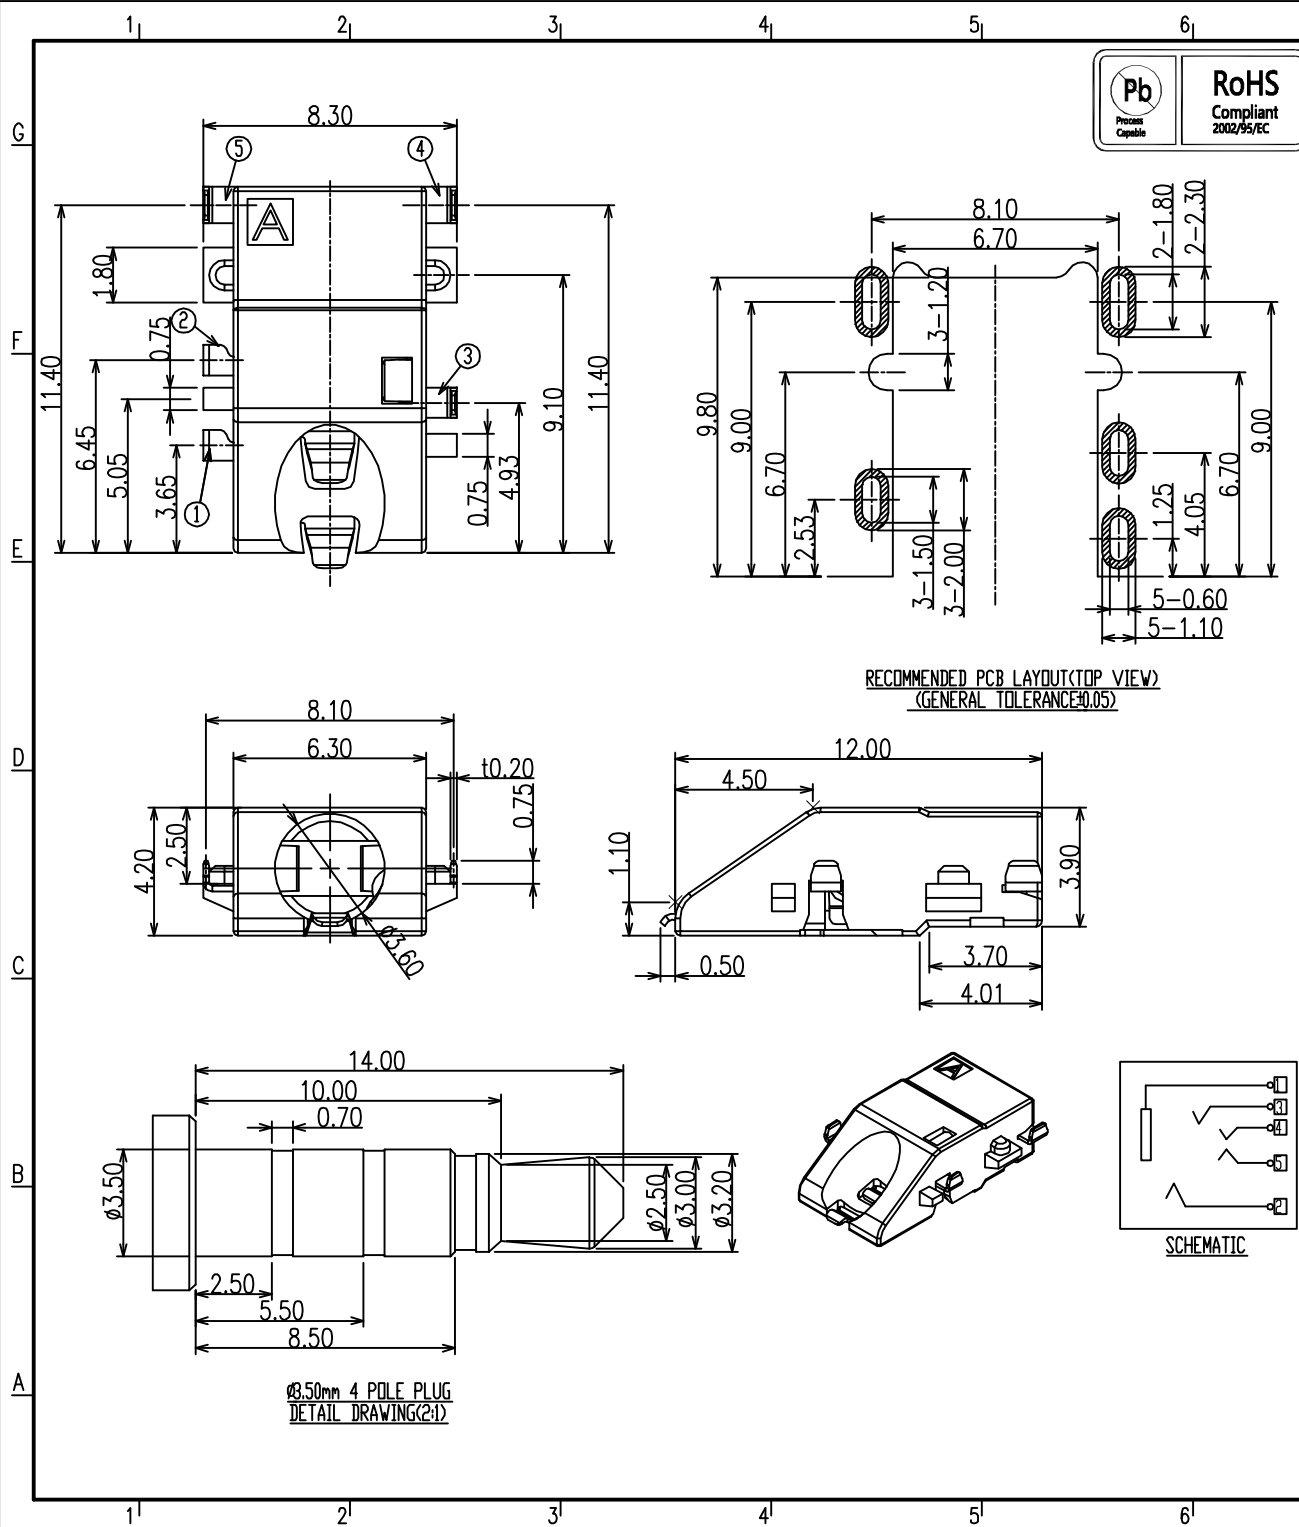


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/05/25

NOTES :

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX. ;
3. INSULATION RESISTANCE: 1000Ω MIN. ;
4. DIELECTRIC WITHSTANDING: 500V AC MIN. ;
5. DURABILITY: 5,000 CYCLES MIN. ;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX. ;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN. ;

PRODUCT NO.

PJ18-05 A B 03-01

①
②
③
④

① PRODUCT SERIES:

PJ18: PHONE JACK CONNECTOR

② PIN NO. :



05: 5PIN


③ MATERIAL:

A: PA9T

④ SERIES NO. :

01: 反向沉板2.5H



CUSTOMER DRAWING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.												
	GENERAL TOLERANCE		DRAWING	DEYI		TITLE: Ø3.50mm PHONE JACK CONNECTOR TYPE1 反向沉板2.5H							
	X. .X ±0.20 .XX ±0.15 .XXX ±0.10		APPROVED			P/N: XB-PJ18-05AB03-01							
	ANGEL TOLERANCE		DATE	2013. 08. 10		DRAWING NO. XB-C-PJ18-01							
X. .XX ±1° .XX ±2° .XXX ±1°				UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1	REV	A