
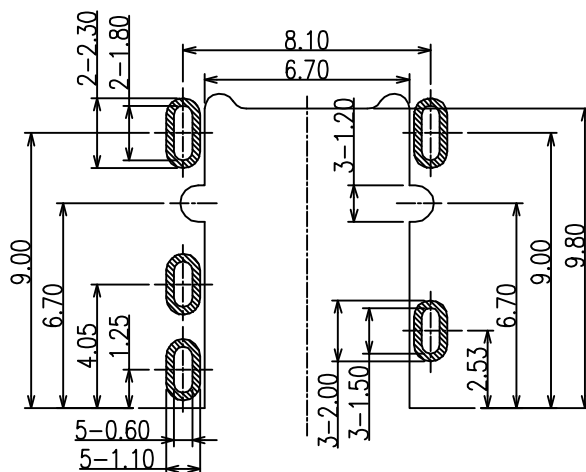




NOTES :

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX. ;
3. INSULATION RESISTANCE: 1000 Ω MIN. ;
4. DIELECTRIC WITHSTANDING: 500V AC MIN. ;
5. DURABILITY: 5,000 CYCLES MIN. ;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX. ;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN. ;

PRODUCT NO.

PJ18-05 A B 03-XX

①
②
③
④

① PRODUCT SERIES:

PJ18: PHONE JACK CONNECTOR

② PIN NO. :



05: 5PIN

③ MATERIAL:

A: PA9T


④ SERIES NO. :

02:正向沉板2.0

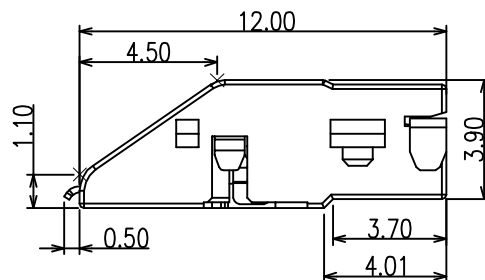

SCHEMATIC

Ø3.50mm 4 POLE PLUG
DETAIL DRAWING(2:1)

CUSTOMER DRAWING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.											
	DRAWING		DEYI			TITLE: Ø3.50mm PHONE JACK CONNECTOR TYPE1正向沉板2.0						
	APPROVED					P/N: XB-PJ18-05AB03-02						
	ANGEL TOLERANCE X. ±3* .XX ±0.20 .XX ±0.15 .XXX ±0.10		DATE 2013. 08. 10			DRAWING NO. XB-C-PJ18-02						
		UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1	REV	A	