

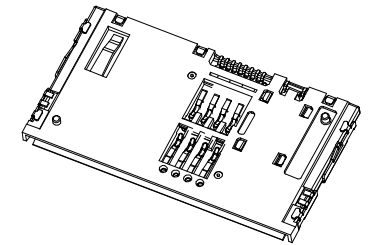

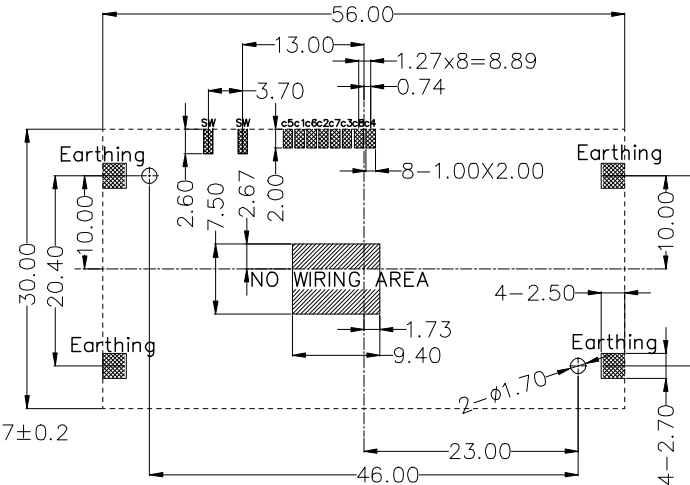



REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A		NEW RELEASE	08/18'13	YZZ		HAIYONG

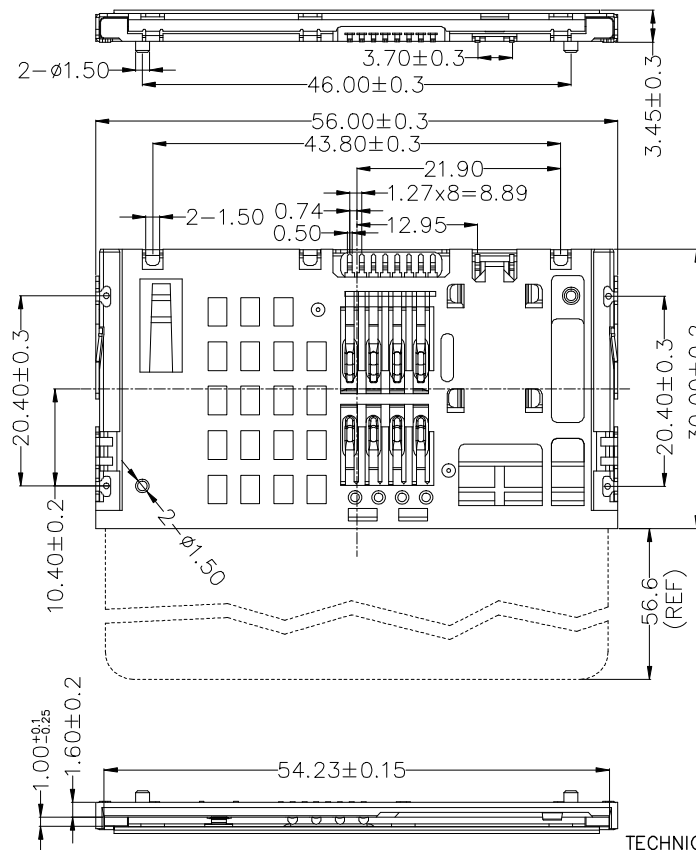

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



SWITCH OPERATION DIAGRAM

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 56.0L X 30.0W X 3.45H mm

Weight: Approx 7.5±0.5g

Durability: 300,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50Ω typical, 100Ω max

Insulation resistance: >1000MΩ/500V DC

3.Solderability

Vapor phase: 215°C.30sec.Max

IR reflow: 260°C.10sec.Max

Manual soldering: 370°C.3sec.Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	BASE	1	HI-temp Thermoplastic	Black UL94V-0
2	COVER	1	SUS	Solder area: Tin plated
3	DATA CONTACT	8	Copper Alloy	Contact area: Gold plated
4	SWITCH CONTACT	1		Contact area: Silver plated
5	FLAKE	1	SUS	

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X" ± .2"	.X" ±	MM				
.X ±0.30	.XX ±	MAT'L	PART NUMBER: XB-402013312			
.XX ±0.25	.XXX ±	SEE NOTES	TITLE: Smart Card Acceptor 不锈钢外壳 (H3.0)			
.XXX ±0.15	.XXXX ±	FINISH	APPD: HaiYong			
		SEE NOTES	DWG NO.: C-402013312-00			
		QTY	CHKD:			
		SEE NOTES	DR: YZZ			
			SCALE: 1:1 SHEET: 1/3 REV: A			