
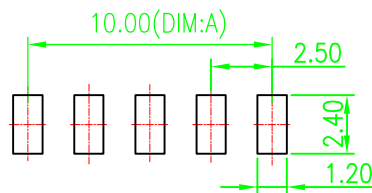
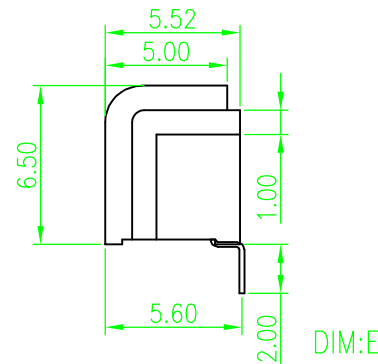
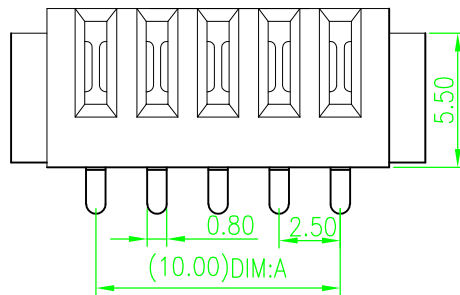


REV.	DESCRIPTION	DRAW.	DATE.

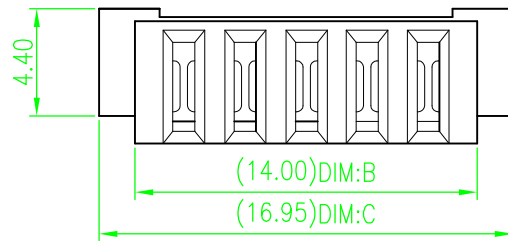

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Current rating:7A

instant CURRENT:10A

Contact Resistance: 30mΩ

Insulation Resistance:100MΩ

Dielectric Voltage:500V

Operating Temperature: $-40^{\circ}\sim 105^{\circ}$



UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	DESIGN	Y.Q.H	DATE	2014.08.26	TITLE: Battery 180° 2.5mm Pitches Female Connector	
	APPROVED		DATE			
	PART NO	XB-B01F-A-SMT	REV:	01	SCALE: 1:1	UNIT: mm
	DRAWING NO	XB-B01F-A-SMT	SIZE:	A4	SHEET: 1/1	