
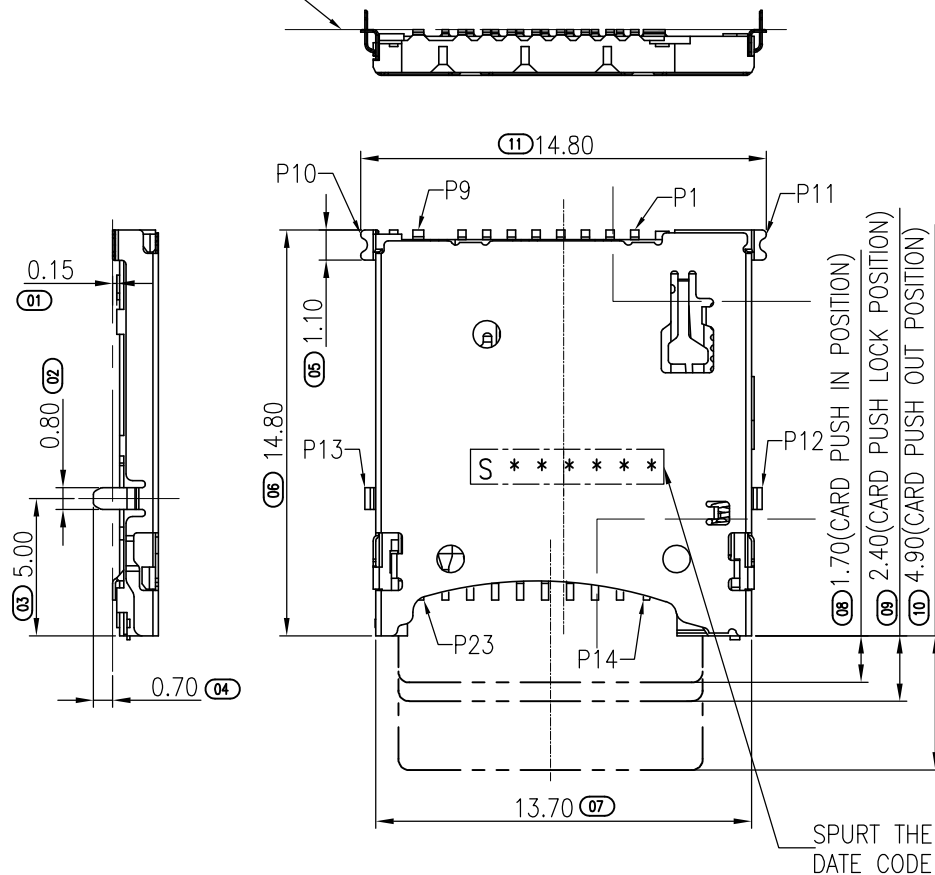
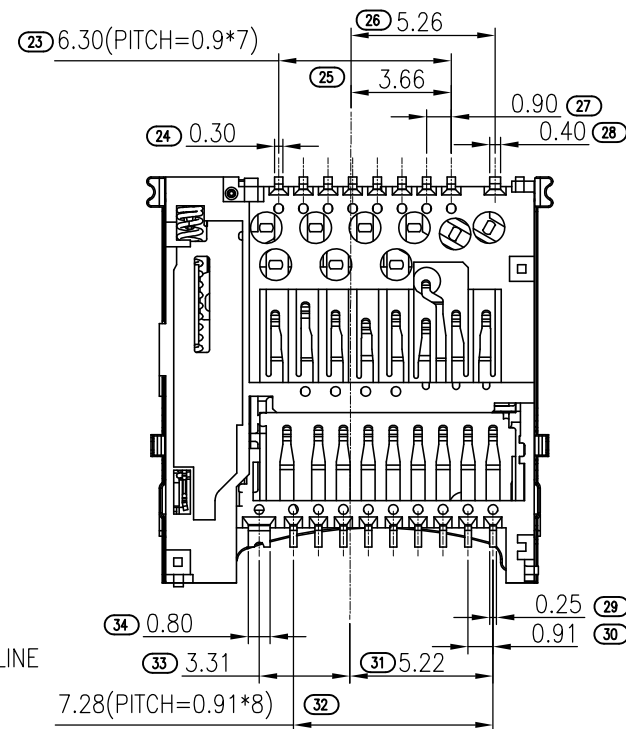


RoHS

BASE LINE

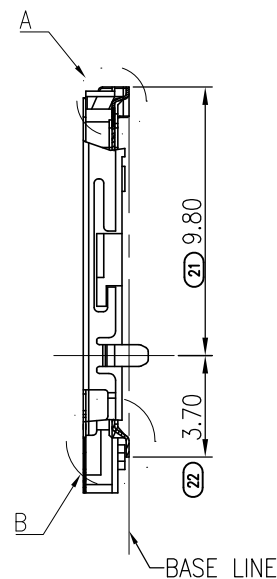


REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
X0		NEW RELEASE	10/23'18	WZX		LHY



DETAIL A
SCALE 2:1DETAIL B
SCALE 2:1

MILLIMETERS	INCH	UNITS	MM	XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER: 102032712		
.X ± 0.30	.XX ± 0.012	SEE NOTES		TITLE: MICRO SD4.0 TOP MOUNT H=1.67 P/P TYPE		
.XX ± 0.20	.XXX ± 0.008	FINISH		APPD:		
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		CHKD:		
		QTY		DR:		
		SEE NOTES		DWG NO.: C-102032712-00		
				SCALE SHEET REV. 1:1 1/3 X0		

RoHS

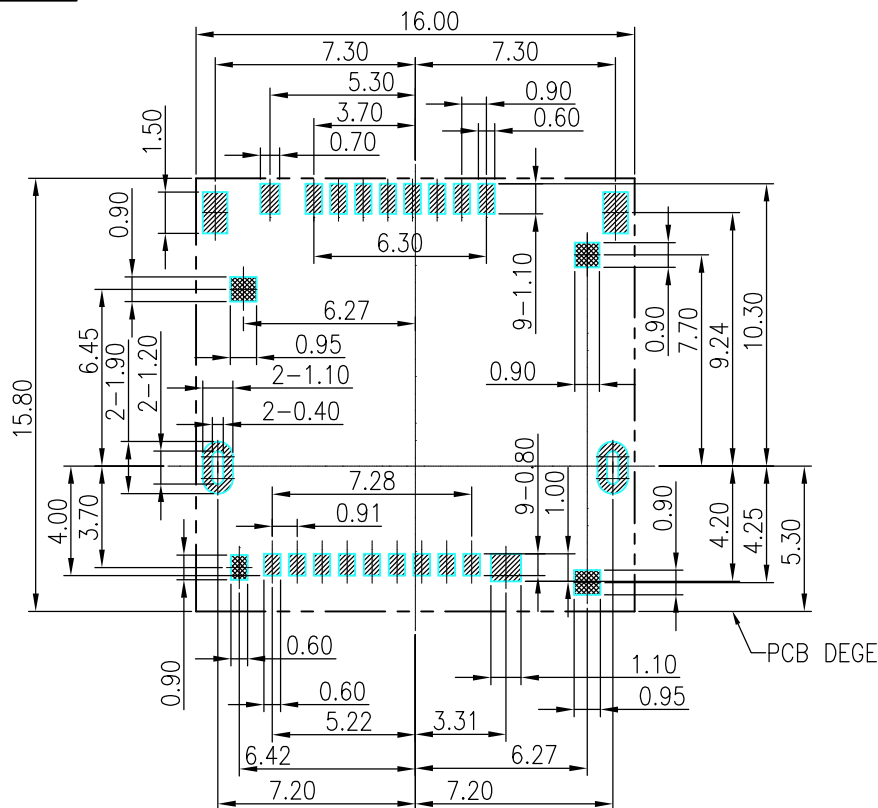

RECOMMEENDED P.C.B LAYOUT
TOP VIEW(TOLERANCE+/-0.05)

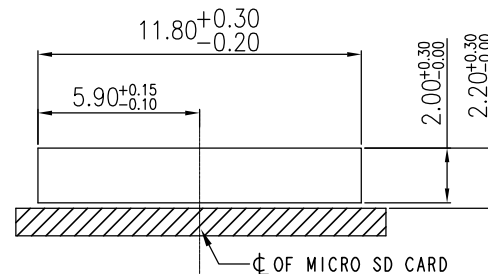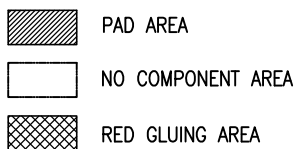

RECOMMEND ID DIMENSION

NOTES:

- (1) MATERIAL:
1-1.PLASTIC: LCP,THERMOPLASTIC UL 94V-0 COLOR: BLACK
1-2.CONTACT: COPPEER ALLOY.
1-3.SELL: STAINLESS STEEL.
- (2) PATING:
2-1.CONTACT:CONTACT AREA AU 3U"OVER NI 50U";SOLDER TAIL
AREA: MATTED TIN 80U"MIN, OVER NI 50".
2-2.SHELL:SOLDERABILITY OVER PLATING NI 50U" OVER ALL.
- (3) CONTACT AND TAIL COPLANARITY TO BE 0.10MM MAX.

Pin No.	Pin Assignment
P1	MICRO SD DAT2
P2	MICRO SD CD/DAT3
P3	MICRO SD CMD
P4	MICRO SD VDD1
P5	MICRO SD CLK
P6	MICRO SD VSS
P7	MICRO SD DAT0/RCLK
P8	MICRO SD DAT1/RCLK
P9	MICRO SD CD
P10	GND
P11	GND
P12	GND
P13	GND
P14	GND
P15	MICRO SD VDD2
P16	MICRO SD SWIO
P17	MICRO SD VSS
P18	MICRO SD D0+
P19	MICRO SD D0-
P20	MICRO SD VSS
P21	MICRO SD DI-
P22	MICRO SD DI+
P23	MICRO SD VSS

OPENING/CLOSE OF SWITCH


	CARD DETECT SWITCH
CARD UNINSERTION	OPEN
CARD HALF INERTION	OPEN
CARD INSERTION	CLOSE
N/O	OPEN CLOSE

MILLIMETERS	INCH	UNITS	MM
X° ± 2°	X° ± 2°	MAT'L	
.X ± 0.30	.XX ± 0.012	SEE NOTES	
.XX ± 0.20	.XXX ± 0.008	FINISH	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	
		QTY	
		SEE NOTES	

XIB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER: 102032712	TITLE: MICRO SD4.0 TOP MOUNT H=1.67 P/P TYPE
APPD:	DWG NO.: C-102032712-00
CHKD:	
DR:	
SCALE 1:1	SHEET 2/3
REV. X0	


RoHS

USER DIRECTION OF UNREELING

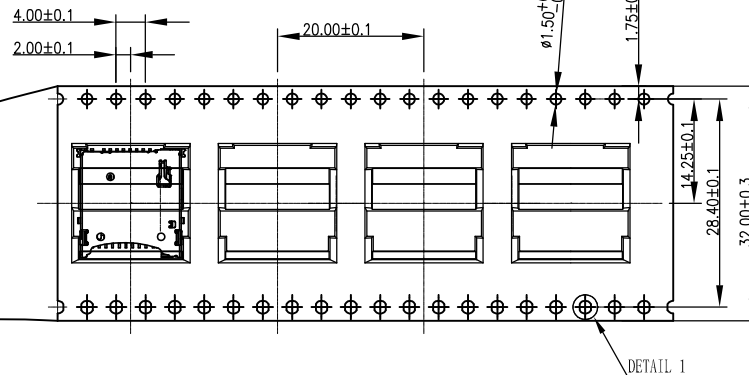

NOTES

1. NUMBER OF CONNECTORS:1000PCS/REEL
2. LEAD TAPE LENGTH




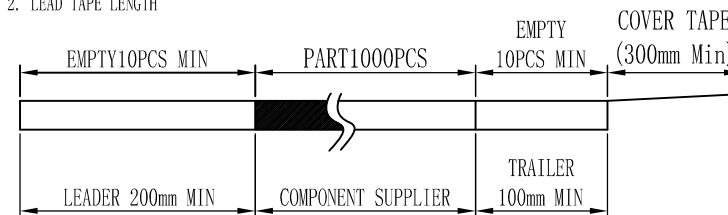


3. QUANTITY:8000PCS/CARTON

COVER TAPE PEELING ANGLE:165°~180°

PEELING FORCE:20~130g

CARRIER TAPE

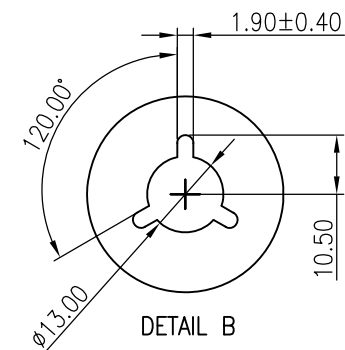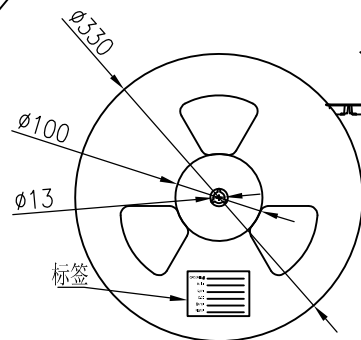


Each top of the bottom of the carton is protected by a piece of pearl cotton

4-TRIANGLE PARTITION
95*95*290 K3K

8 rolls per carton

Tape type sealing box



RoHS
LABEL

CARTON
350*350*340 K=K

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER: 102032712		TITLE: MICRO SD4.0 TOP MOUNT H=1.67 P/P TYPE	
.X ± 0.30	.XX ± 0.012	SEE NOTES		APPD:		DWG NO.: C-102032712-00	
.XX ± 0.20	.XXX ± 0.008	FINISH		CHKD:			
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		DR:			
		QTY					
		SEE NOTES					