
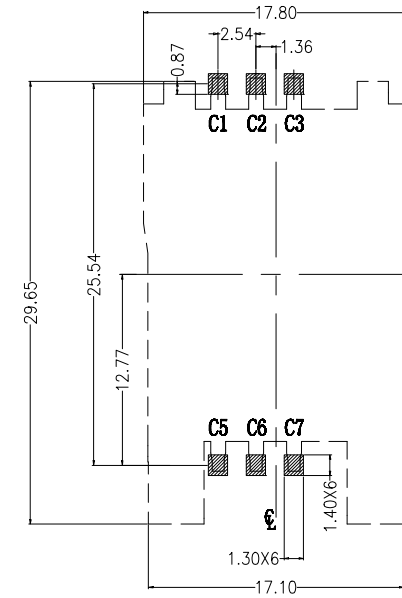

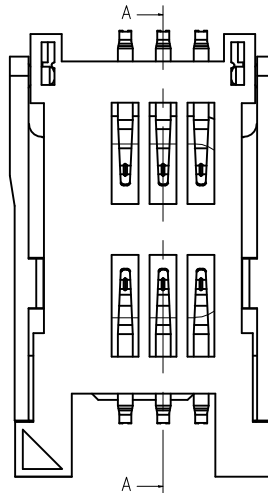



RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	11/23'19	JANYZ		WZX
A1	ECN2008012	变更大窗口版, 新增电镀规格	08/17'20	ZHOU	TEDDY	SUNNLY

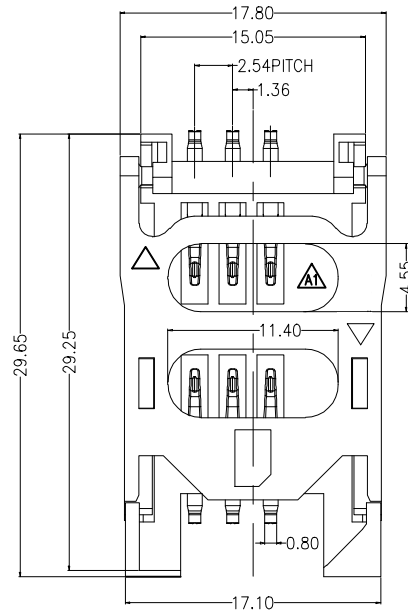

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

SIM卡引脚功能定义

触电极	分配	触电极	分配
C1	电源电压 VCC	C5	地 GND
C2	复位 RST	C6	编程电压 VPP
C3	时钟 CLK	C7	输入/输出 I/O

NOTES:

1. MATERIAL:

HOUSING: LCP UL94V-0.BLACK/WHITE
COVER:LCP UL94V-0.BLACK/WHITE
CONTACT: C5191

2.PLATING:


CONTACT: 100u" Ni UNDERPLATED OVERALL
G/F PLATED ON CONTACT AREA
100u" MATTE TIN PLATED ON SOLDER AREA

3. TECHNICAL SPECIALITY:

RATED VOLTAGE: 50V AC MAX.
CURRENT RATING: 1.0A MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
CONTACT RESISTANCE: 100mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
OPERATING TEMPERATURE: -40'~+85'


MILLIMETERS	INCH	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
X° ± 2'	X° ± 2'	MAT'L				
.X ± 0.38	.XX ± 0.012	SEE NOTES				
.XX ± 0.25	.XXX ± 0.008	FINISH				
.XXX± 0.15	.XXXX± 0.004	SEE NOTES				
		QTY				
		SEE NOTES				
			DR:			
			CHKD:			
			APPD:			
			PART NUMBER: XB-102153622			
			TITLE: 2.0H 51M 6PIN全量数 (电表) 本色			
			DWG NO.: C-102153622-00			
				SCALE 1:1	SHEET 1/2	REV. A1

RoHS


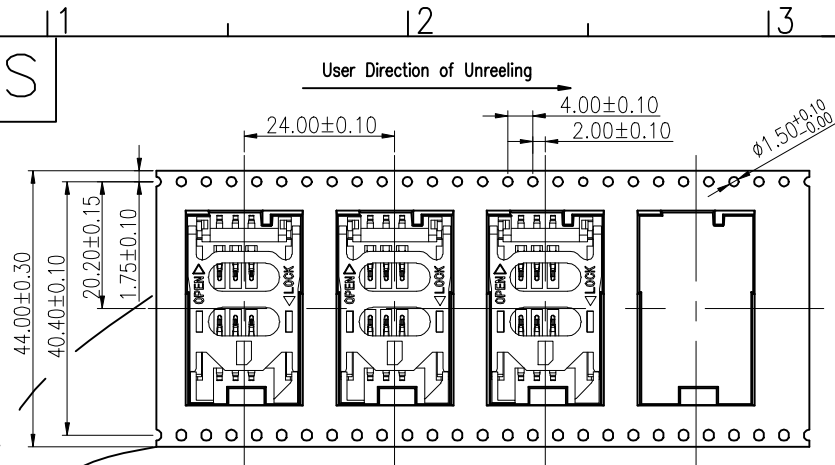


NOTES

1. NUMBER OF CONNECTORS: 700PCS/REEL
2. LEAD TAPE LENGTH

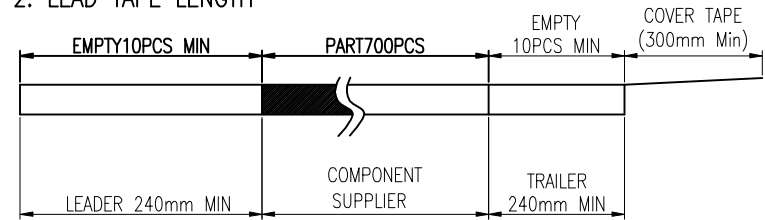

3. QUANTITY: 4200PCS/CARTON

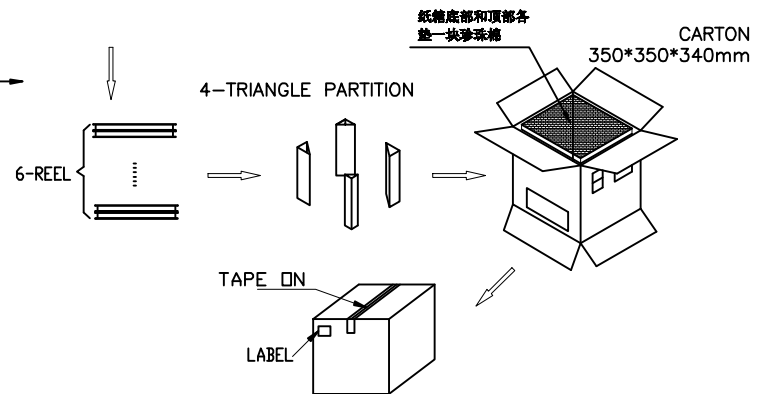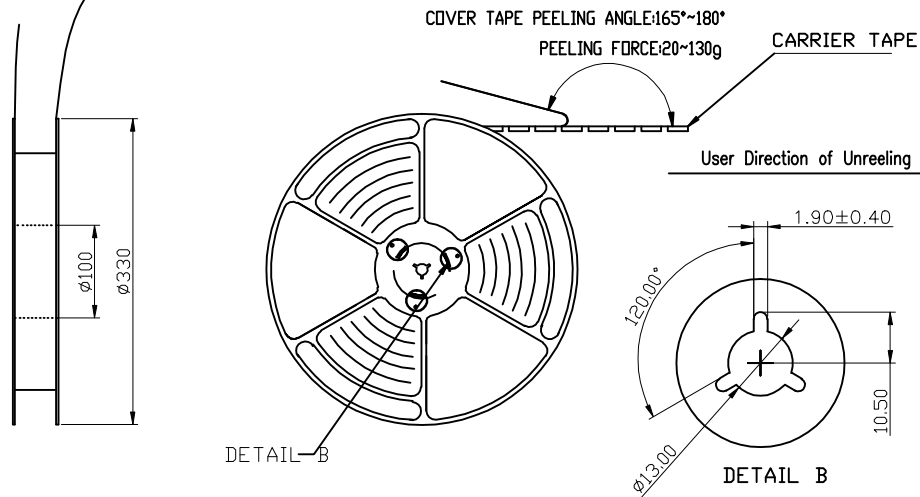

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司	
X' ± 2'	X' ± 2'	MAT'L		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
.X ± 0.30	.XX ± 0.012	SEE NOTES		PART NUMBER:	TITLE:
.XX ± 0.20	.XXX ± 0.008	FINISH		XB-102153622	2.8H STM 0PIN全塑封装(电表)
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		APPD:	DWG NO.:
		QTY		CHKD:	C-102153622-00
		SEE NOTES		DR:	SCALE SHEET REV.
					1:1 2/2 A1