

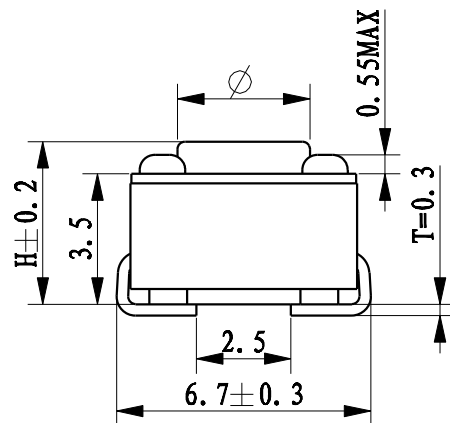


REVISION

A




$0.25 \pm 0.1\text{mm}$
Travel




技术参数


1. 额定电流: 50mA 12VDC
2. 接触电阻: 100mΩ
3. 按 力: 260 ± 50gf
4. 行 程: 0.25 ± 0.1mm
5. 绝缘电阻: 100MΩ
6. 抗电强度: 100v 50Hz 1Min
7. 寿 命: 100,000 次

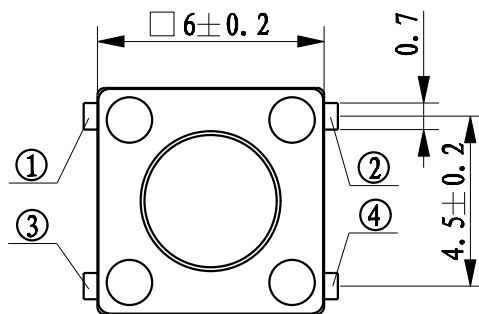


CIRCUIT



P. C. B LAYOUT

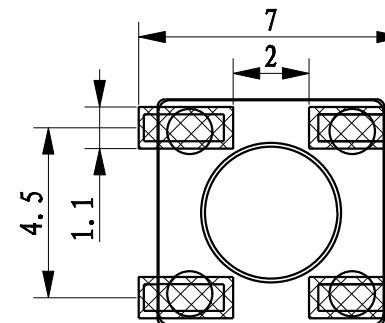

φ (mm)	H (mm)
3.5	4.3
3.5	4.5
3.5	5.0
3.5	5.5
3.5	6.0
3.3	6.5
3.4	7.0
3.3	7.5
3.3	8.0
3.3	8.5
3.1	9.0
3.1	9.5
3.1	10.0
3.0	10.5
3.0	11.0
3.0	11.5
3.0	12.0
3.0	12.5
3.0	13.0
3.0	13.5
3.0	14.0
3.0	14.5
3.0	15.0
3.0	15.5
3.0	16.0
3.0	17.0

TITLE	TACT SWITCH			DRAWN	许金龙	TOLERANCE OTHERWISE UNLESS SPECIFIED					
PRODUCT NO.	XB-TS-1102S-M			CHECKED	吴永友						
DRAWING NO.	XBTS-1102S-M			APPROVED	赵崇生	TOLERANCE	± 0.2				
SCALE	5: 1	UNIT	mm	DATE		ANGLE TOL	± 1°				
 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.											
								NO.	PARTS	MATERIAL	QTY