


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'20	XL		MOON

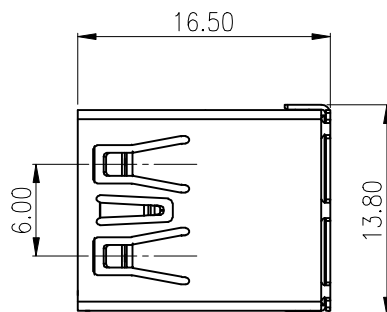

PART No.:

USB SERIES
PLATING:
01:G/F+TIN

10401234X-X

SHELL:
A:SUS
B:BRASS
C:SPCC

PAKING:
1: TRAY
2: REEL
SERIAL NO.

NOTES:

1.ELECTRONIC:

CONTACT CURRENT RATING:1.5A
CONTACT RESISTANCE: 30mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.





2.MECHANICAL:

MATING FORCE:3.57KG MAX
UNMATED FORCE:1.02KG MIN

3.ENVIRONMENT CHARACTERISTICS:


OPERING TEMPERATURE:-55°C TO +105°C

4.标示"▲"符号的尺寸为重点检验尺寸。

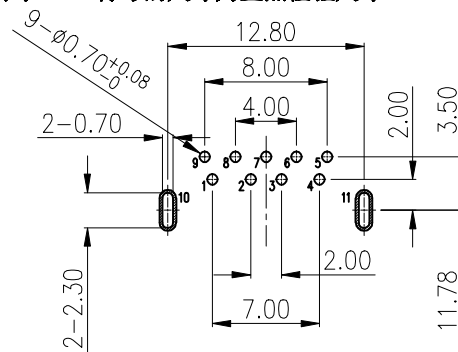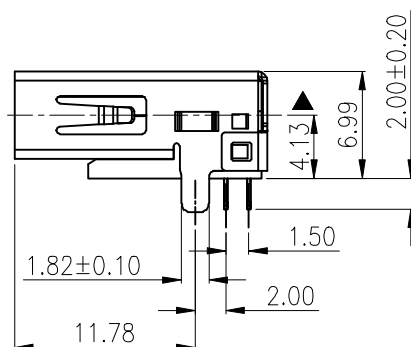

RECOMMENDED PCB LAYOUT

CONNECTOR
FRONT EDGE

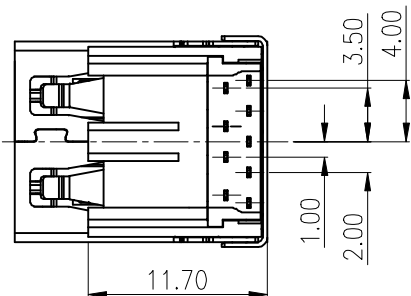

5	SHELL	1	STAINLESS STEEL	NI PLATED
4	5PIN	5	COPPER ALLOY	AU/TIN PLATED
3	4PIN	4	PHOSPHOR BRONZE	AU/TIN PLATED
2	COVER	1	LCP BLUE	(UL 94V-0)
1	HOUSING	1	LCP BLUE	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司		
		MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X ± 2'	X ± 2'	MAT'L			
.X ± 0.38	.XX ± 0.015	SEE NOTES			
.XX ± 0.25	.XXX ± 0.010	FINISH			
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES			
		QTY			
		SEE NOTES			
			PART NUMBER:	TITLE:	
			XB-104012342-B	USB3.0 A90° 正向板上CH4.13直脚无卷边	
			APPD:	DWG NO.:	
			CHKD:	C-104012342-00	
			DR:		
				SCALE	SHEET
				1:1	1/2
					REV.
					A0

F

