



RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	HC	/	MOON

DATA
CODE

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating:2.0A/contact terminal
2. 额定电压: Voltage Rating: 30V DC
3. 接触阻抗: Contact Resistance:30 milliohms MAX
4. 耐电压: Dielectric Withstanding voitage:300 V AC AT Sea Level
5. 绝缘阻抗: Lnsulation Resistance:1000MEGA ohms min

物理性能: Mechanical:

1. 插拔力: Cnector Mate and Unmate Force
Mate force:3.0kgf(MAX)
Unmate force:0.7kgf(MIN)
2. 端子保持力: Terminal Retenion:1.2kgf(MIN)

原材料: Material:







1. 塑胶: Housing:
Hing Temperature Thermaplastics,UL94-0 PBT
2. 端子: Contact:Copper Alloy C2680
3. 外壳: Shell:SPCC

电镀: Finish:

1. 端子: Contact:Piated GOLD in Mating Area;
Bright Tin On Solder Talls
2. 外壳: Shell:Nickel Plating

PART No.:

104417971

USB SERIES
PLATING:
01: Au1u"+ TinPAKING:
1: TRAY
2: REEL
SERIAL NO.RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW(TOLERANCE:±0.05)

TERMINAL ASSIGNMENT

CONTACT NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

TERMINAL ASSIGNMENT

CONTACT NUMBER	SIGNAL NAME
5	SSTXM-
6	SSTXP+
7	GND
8	SSTXM-
9	SSTXP+


5	SHELL-B	SUS	T=0.25	NiPLATED	1
4	SHELL-A	BRASS	T=0.30	Ni30u*Min	1
3	TERMINAL-B	BRASS	T=0.2	Sn 60U*+ Au 1U*	4
2	TERMINAL-A	BRASS	T=0.2	Sn 60U*+ Au 1U*	4
1	HOUSING	PBT	/	BLACK	1
NO.	Part Name	MATERIAL	THICK	FINISH	Q'TY

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L					
.X ± 0.38	.XX ± 0.015	SEE NOTES					
.XX ± 0.25	.XXX ± 0.010	FINISH					
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES					
			QTY				
			SEE NOTES				
				PART NUMBER:	TITLE:		
				XB-104417971	USB 3.0 双层90度有盖弯脚无卷边		
				APPD:	DWG NO.:		
					C-104417971-00		
				CHKD:			
				DR:			
					SCALE	SHEET	REV.
					1:1	1/2	A0

RoHS


一:

- 1) 将成品一一放入包装盘内, 窗口朝上, 靠边两排焊脚朝内.
- 2) 包装时, 依图所示. 一个包装盘放满成品.
- 3) 盖上托盘上盖.
- 4) 一盘装100PCS.

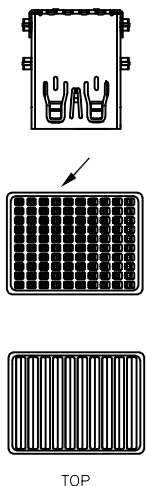


二:

- 4) 依次往上叠放10盘, 产品方向保持一致, 用PE膜缠绕为工字形为一扎
- 5) 将2扎产品盘放入外箱中. 共20个产品盘,

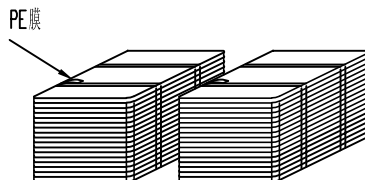


装箱

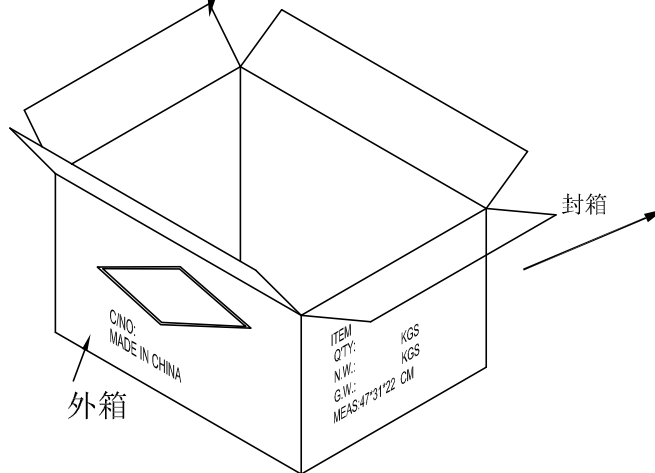

三:

- 1) 用透明胶将纸箱封实.
- 2) 将标签 (按要求打印好的) 贴在纸箱侧麦右上方.
- 3) 尾数箱用纸壳或其它填充物填满空间, 或将纸箱割小至刚好装下.
- 4) 在搬运过程中要轻拿轻放.
- 5) 在运输中不可堆放过多, 不可有重压现象.

注: 客户特殊要求请参照业务的出货资料

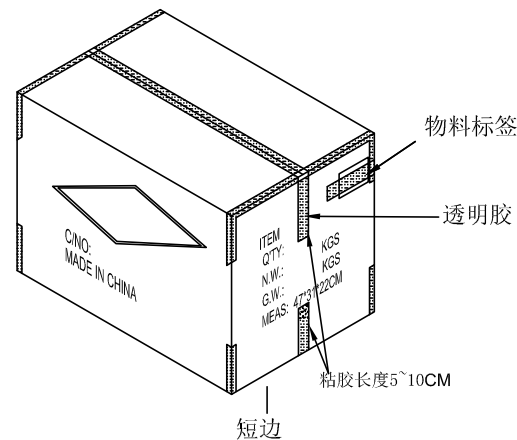

PE膜	宽40厚0.03	若干
透明胶	W=15	若干
5622吸塑盘盖		20
5622吸塑盘底		20
外箱	470*310*220	1
品名	规格(mm)	用量(PCS)

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER:		TITLE:	
.X ± 0.38	.XX ± 0.015	SEE NOTES		XB-104417971		USB 3.0 双层90度有盖弯脚无卷边	
.XX ± 0.25	.XXX ± 0.010	FINISH		APPD:		DWG NO.:	
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES		CHKD:		C-104417971-00	
		QTY		DR:			
		SEE NOTES					