

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/11'17	HFL	HFL	LHY
A1	ECN1806012	按实际修改产品品名	20/06.18	SUPER	HFL	TEDDY

NOTES:

1. MATERIAL:
1.1 Housing:High Temperature Thermoplastic
UL94V-0; Color Black.
1.2 Terminal:Copper Alloy.
1.3 Shell:Stainless Steel

2.PLATING:
2.1 Contact: Contact Area:Au G/F, Solder area:Matte tin
80u"Min ;Under plate Ni 30u"Min all over
2.2 CD PIN: Contact Area:Au G/F,Under plate Ni 30u"Min all over

3. SPECIALITY:
3.1 Rated current:1.0A
3.2 Rated voltage:30V
3.3 Contact Resistance:50mΩ MAX
3.4 Insulation Resistance:1000MΩ MIN 500V DC
3.5 Dielectric withstanding voltage: 500V AC.
3.6 Solder ability:255±5℃, 5±0.5s.
3.7 Durability:10000 Cycles Min.
3.8 Operating condition:Temperature-40℃~+85℃;
Humidity 80% R.H MAX

PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BITO)
8	DAT1	I/O/PP	DATE LINE(DIT1)

MILLIMETERS	INCH	UNITS	MM
X° ± 2'	X° ± 2'	MAT'L	
.X ±0.30	.XX ±0.012	SEE NOTES	
.XX ±0.20	.XXX ±0.008	FINISH	
.XXX±0.10	.XXXX±0.004	SEE NOTES	
		QTY	
		SEE NOTES	


RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/−0.05)

东莞市溪榜电子有限公司	
DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER: XB-10201 1492	TITLE: TF 正向沉板0.85(四个脚)DIP型卡座
APPD:	DWG NO.: C-102011492-00
CHKD:	SCALE: 1:1
DR:	SHEET: 1/2
	REV: A1

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
AO	————	NEW RELEASE	07/11'17	HFL	HFL	LHY
A1	ECN1806012	按实际修改产品品名	20/06.18	SUPER	HFL	TEDDY

NOTES:

1. MATERIAL:
 - 1.1 Housing:High Temperature Thermoplastic
UL94V-0; Color Black.
 - 1.2 Terminal:Copper Alloy.
 - 1.3 Shell:Stainless Steel
- 2.PLATING:
 - 2.1 Contact: Contact Area: Au G/F, Solder area:Matte tin
80u"Min ;Under plate Ni 30u"Min all over
 - 2.2 CD PIN: Contact Area: Au G/F,Under plate Ni 30u"Min all over
3. SPECIALITY:
 - 3.1 Rated current:1.0A
 - 3.2 Rated voltage:30V
 - 3.3 Contact Resistance:50mΩ MAX
 - 3.4 Insulation Resistance:1000MΩ MIN 500V DC
 - 3.5 Dielectric withstanding voltage: 500V AC.
 - 3.6 Solder ability:255±5℃, 5±0.5s.
 - 3.7 Durability:10000 Cycles Min.
 - 3.8 Operating condition:Temperature-40℃~+85℃;
Humidity 80% R.H MAX

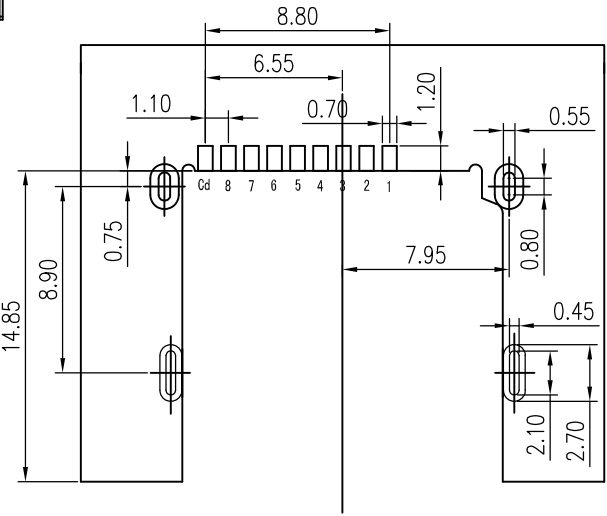


RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ± 0.05)


PIN NO.	NAME	YTPTE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

MILLIMETERS	INCH	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2"	X° ± 2"	MM	PART NUMBER:		TITLE:	
.X ± 0.30	.XX ± 0.012	MAT'L	XB-10201 1492		TF 正向沉板0.85 (四个脚) DIP型卡座	
.XX ± 0.20	.XXX ± 0.008	SEE NOTES	APPD:		DWG NO.:	
.XXX ± 0.10	.XXXX ± 0.004	FINISH	CHKD:		C-102011492-00	
		SEE NOTES	DR:			
		QTY			SCALE	SHEET
		SEE NOTES			1:1	1/2
					REV.	A1


RoHS

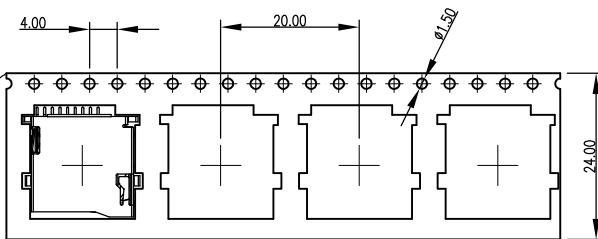


客户拉出方向

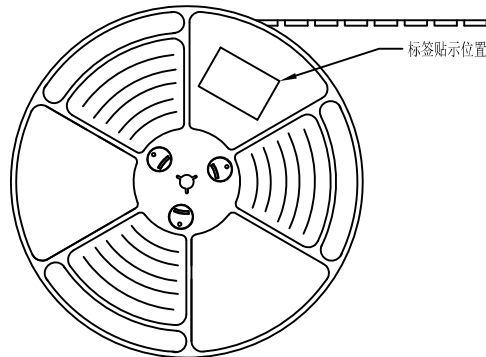

Ø330

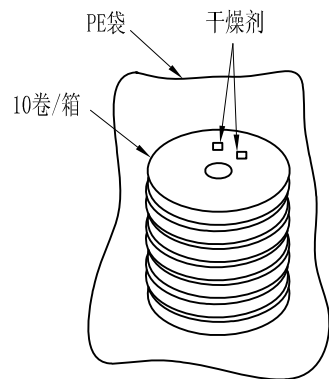


纸箱顶部和底部各垫一块珍珠棉

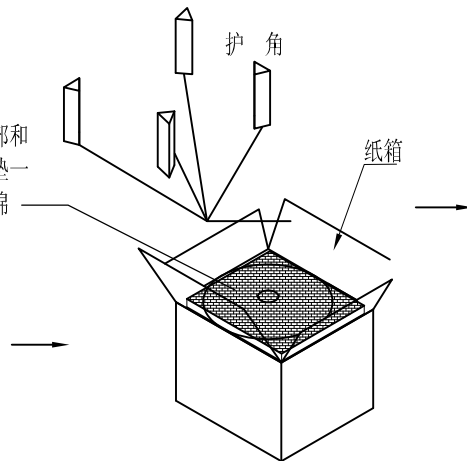


纸箱

NOTES

- 每卷包装数量:1000PCS/每卷
- 卷带包装方式:

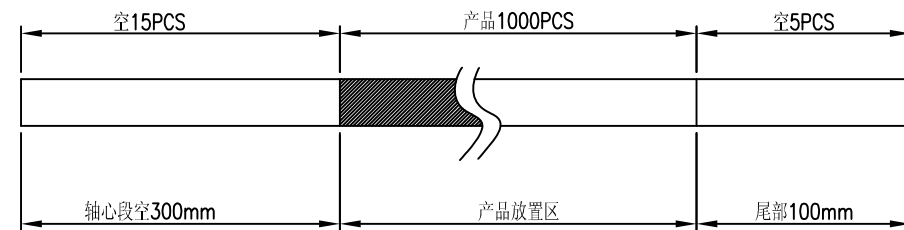

3.每箱包装数量:10000PCS/箱

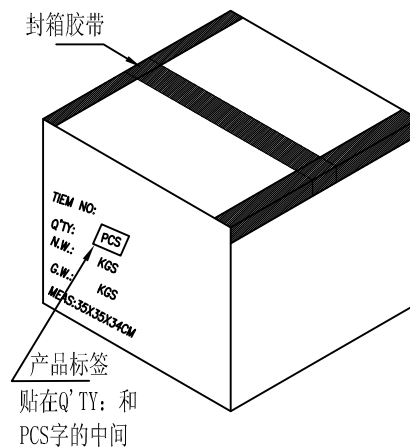

贴在Q' TY: 和 PCS字的中间

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2'	X° ± 2'	MAT'L		PART NUMBER:		TITLE:	
.X ± 0.30	.XX ± 0.012	SEE NOTES		XB-10201 1492		TF 正向沉板0.85 (四个脚)DIP型卡座	
.XX ± 0.20	.XXX ± 0.008	FINISH		APPD:		DWG NO.:	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		CHKD:		C-102011492-00	
		QTY		DR:			
		SEE NOTES					