


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'19	FY	/	MOON


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

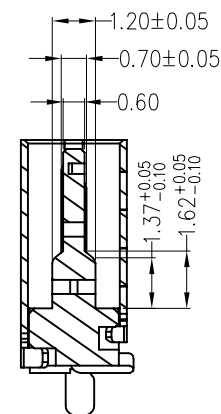


SECTION A-A

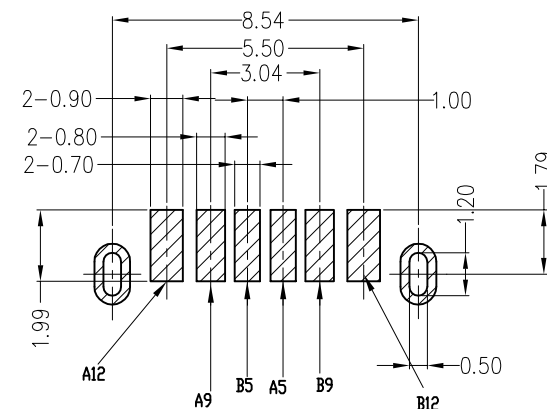RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm




5	COVER	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NO Plated	1PCS
3	SHELL	STAINLESS STEEL	Ni:30u" Plated	1PCS
2	CONTACT	COPPER ALLOY	Au1u"/Ni:30u" Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
		MM			
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER: XB-104012772		
.X ± 0.35	.XX ± 0.014	SEE NOTES			
.XX ± 0.25	.XXX ± 0.010	FINISH	TITLE: TYPE C 6PIN立式SMT		
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES			
		QTY	DWG NO.: C-104012772-00		
		SEE NOTES			
		CHKD:	SCALE: 1:1		
		DR:			
			SHEET: 1/2	REV: A0	

SECTION B-B

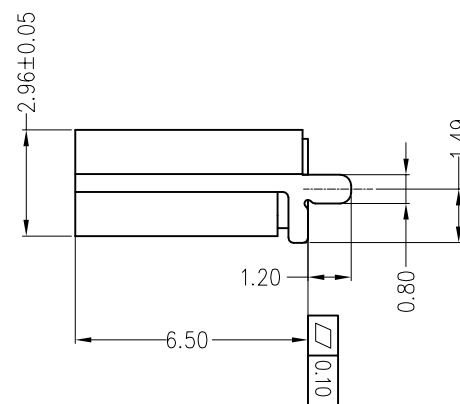


加塞子示意图

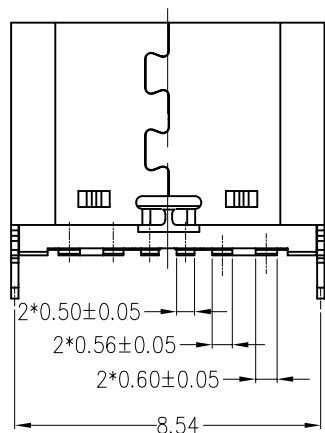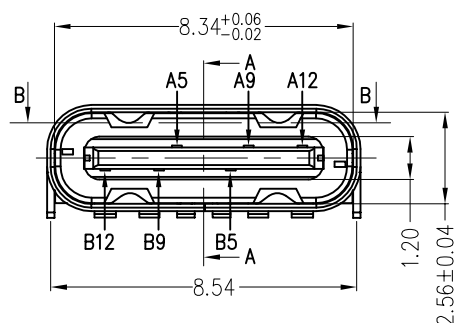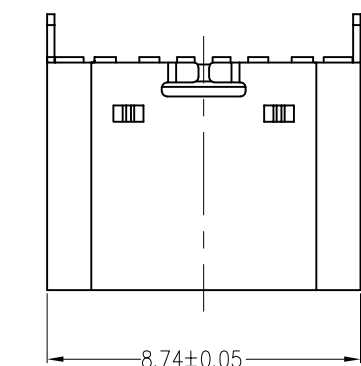

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

RoHS

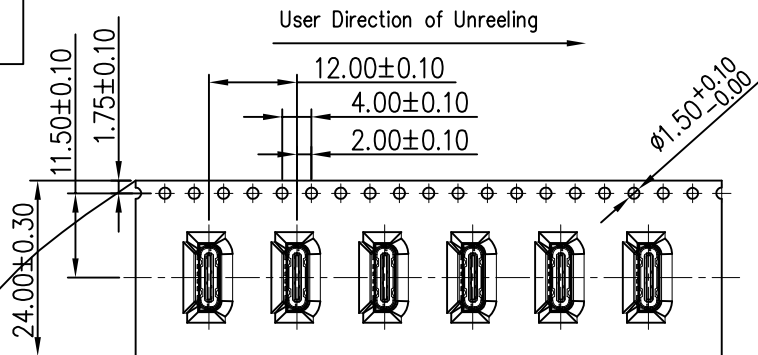


COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

CARRIER TAPE

User Direction of Unreeling


DETAIL B

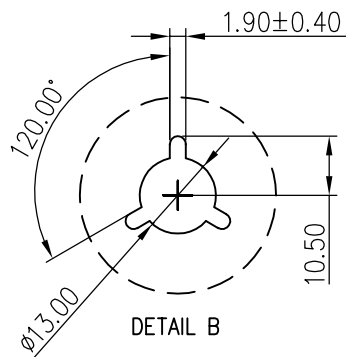


NOTES


1. NUMBER OF CONNECTORS: 600PCS/REEL

2. LEAD TAPE LENGTH

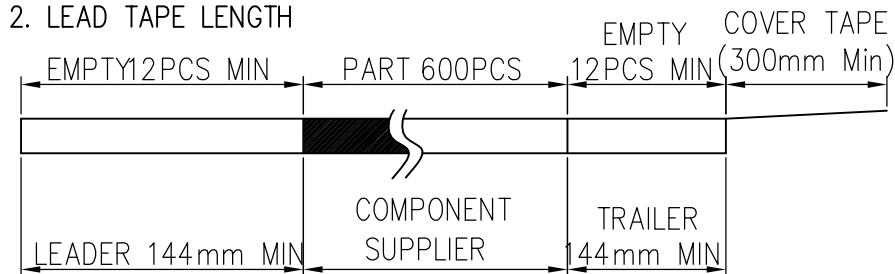

3. QUANTITY: 6000PCS/CARTON

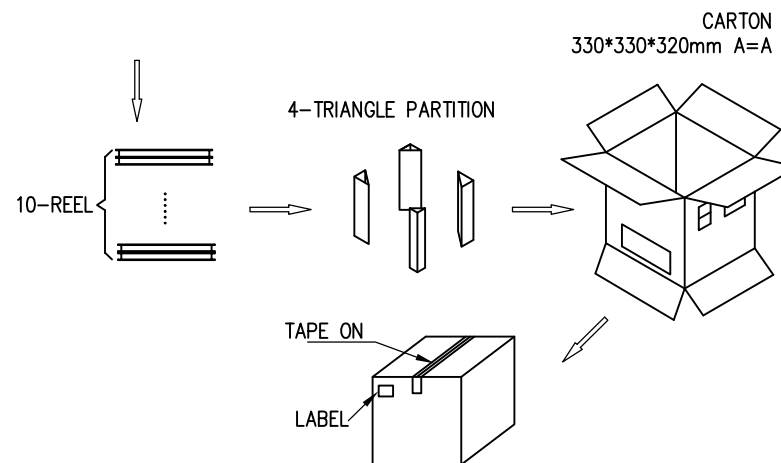

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER:		TITLE:			
.X ± 0.35	.XX ± 0.014	SEE NOTES	XB-104012772		TYPE C 6PIN立式SMT			
.XX ± 0.25	.XXX ± 0.010	FINISH	APPD:		DWG NO.:			
.XXX± 0.15	.XXXX± 0.006	SEE NOTES	CHKD:		C-104012772-00			
		QTY	DR:			SCALE	SHEET	REV.
		SEE NOTES				1:1	2/2	A0