








RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'16	QST	/	MOON


NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

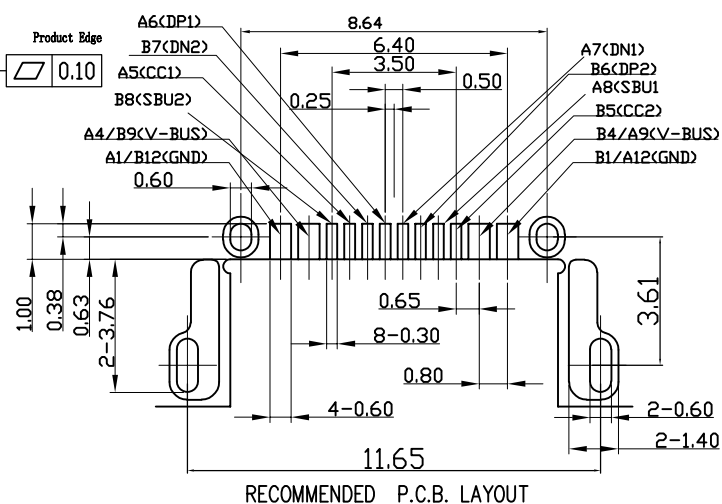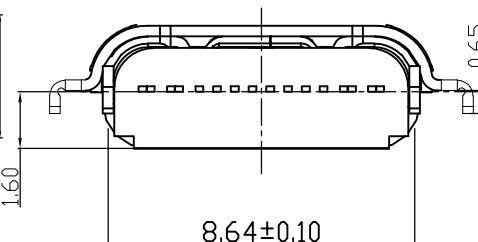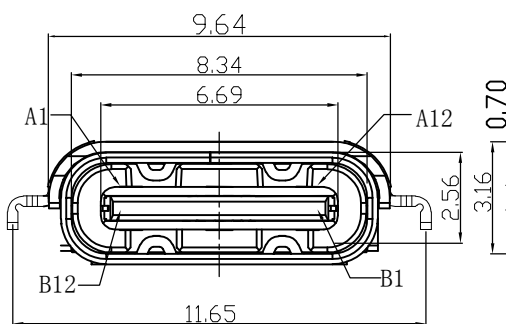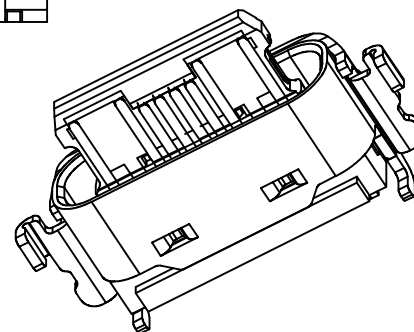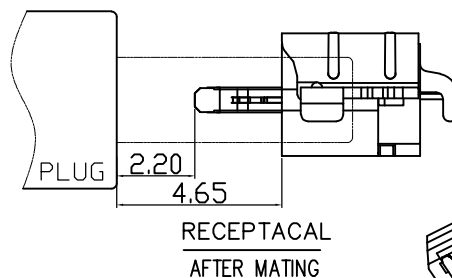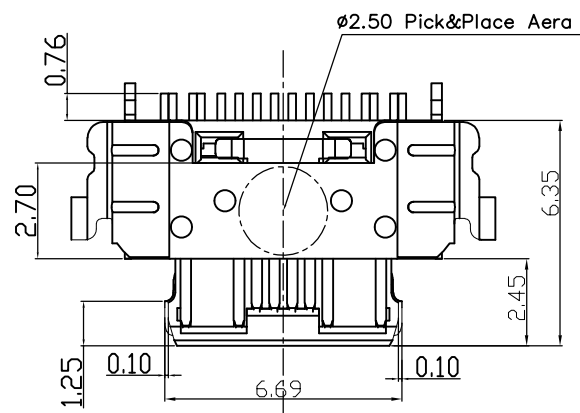

RECOMMENDED P.C.B. LAYOUT

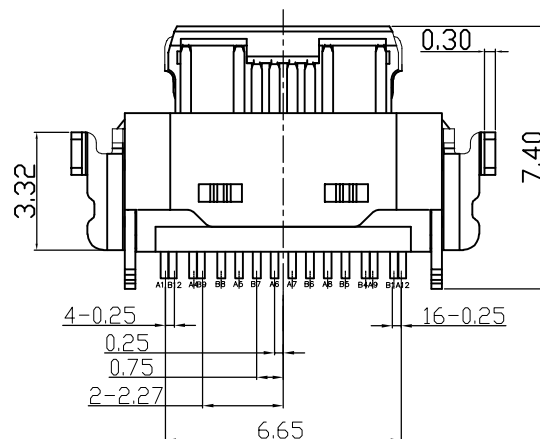


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

7	COVER SHELL	STAINLESS STEEL	Ni Plated	IPCS
6	SHELL	STAINLESS STEEL	Ni Plated	IPCS
5	SHIELDING PLATE	STAINLESS STEEL	---	IPCS
4	MD	PART	BLACK	IPCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	PART	BLACK	IPCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MILLIMETERS	INCH	UNITS	MM
X° ± 2°	X° ± 2°	MAT'L	
.X ± 0.38	.XX ± 0.015	SEE NOTES	
.XX ± 0.25	.XXX ± 0.010	FINISH	
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES	
		QTY	
		SEE NOTES	


XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER: XB-104316892	TITLE: TYPE C单排16P 沉板1.6双壳舌片外漏 (A款)
APPD:	DWG NO.: C-104316892-00
CHKD:	SCALE: 1:1
DR:	SHEET: 1/2
	REV: A0

RoHS

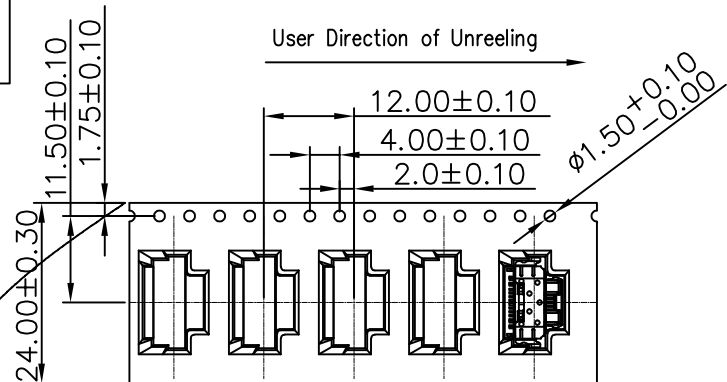

NOTES

1. NUMBER OF CONNECTORS: 1500 PCS/REEL
2. LEAD TAPE LENGTH



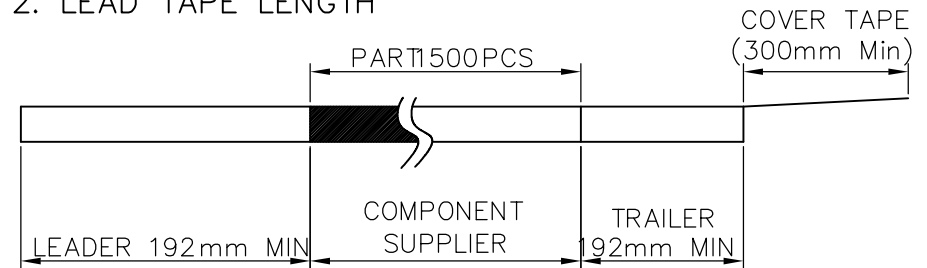


COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

CARRIER TAPE

3. QUANTITY: 15000 PCS/CARTON

User Direction of Unreeling

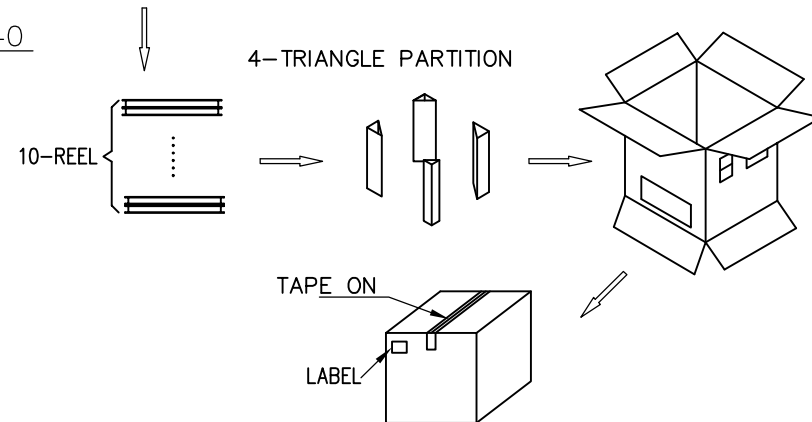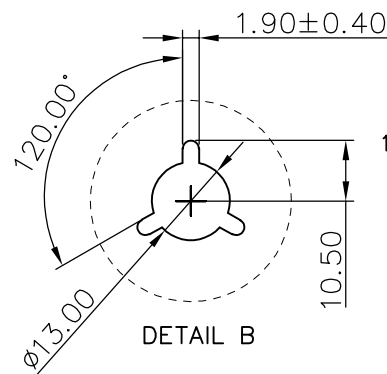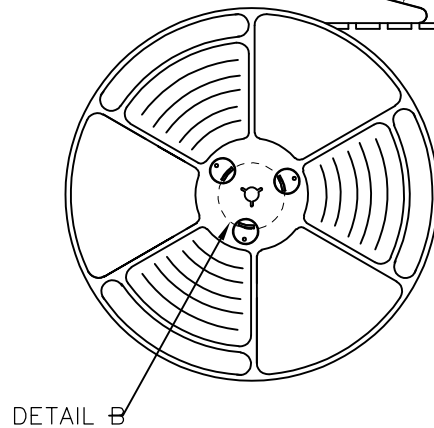

MILLIMETERS	INCH	UNITS	MM	XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2'	X° ± 2'	MAT'L					
.X ± 0.38	.XX ± 0.015	SEE NOTES					
.XX ± 0.25	.XXX ± 0.010	FINISH					
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES					
		QTY					
		SEE NOTES					
				PART NUMBER: XB-104316892		TITLE: TYPE C 单排16P 沉板1.6双壳舌片外漏 (A款)	
				APPD:		DWG NO.: C-104316892-00	
				CHKD:			
				DR:			
						SCALE 1:1	SHEET 2/2
						REV. A0	