

R o H S








Ø2.50 Pick&Place Aera

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	QST	/	MOON


NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

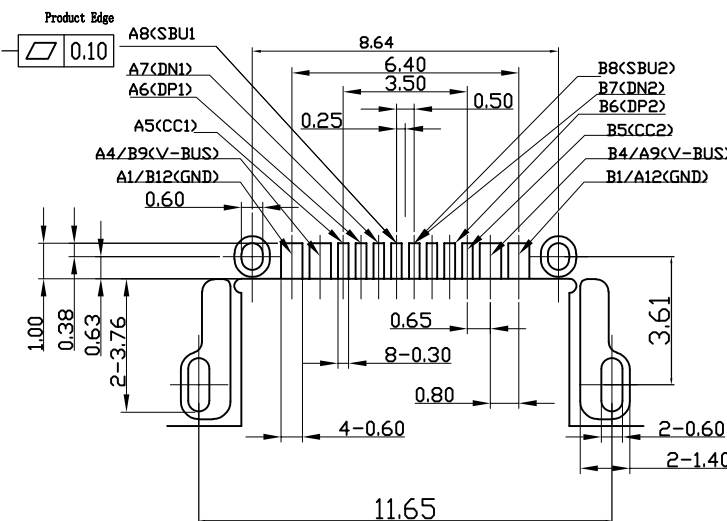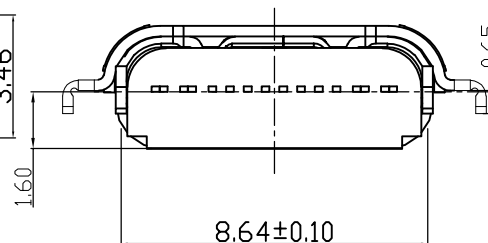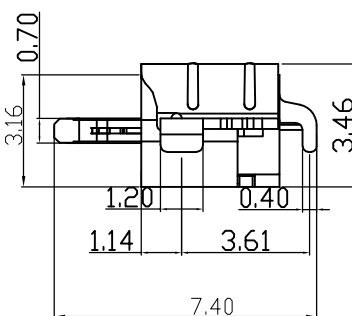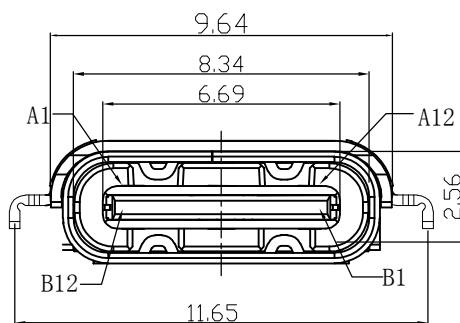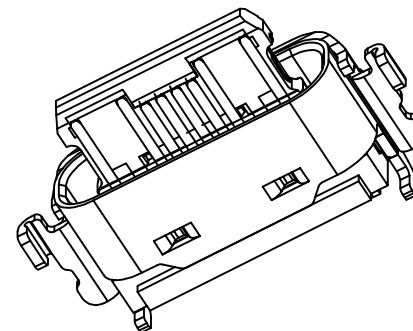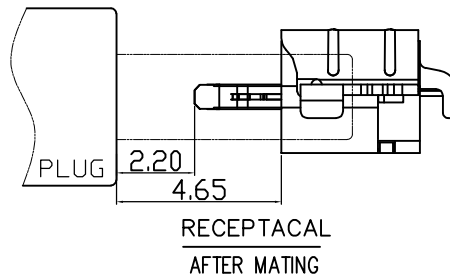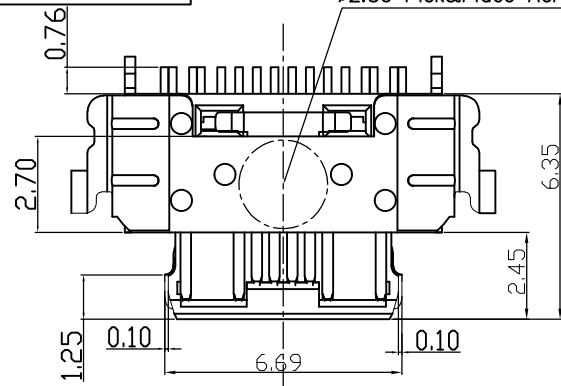


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

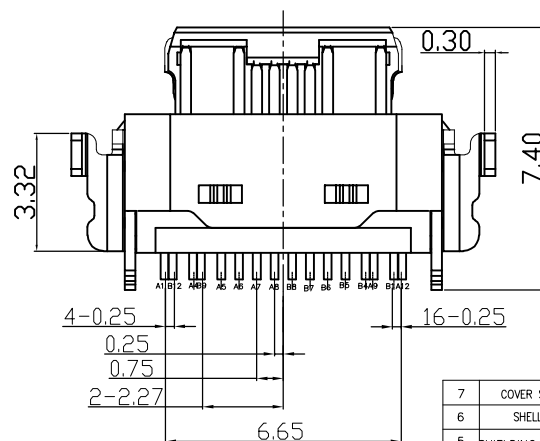


7	COVER SHELL	STAINLESS STEEL	NI Plated	1PCS
6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	PA9T	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	PA9T	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


MILLIMETERS	INCH	UNITS MM
X. ^o ± 2'	X. ^o ± 2'	MAT'L
.X ± 0.38	.XX ± 0.015	SEE NOTES
.XX ± 0.25	.XXX ± 0.010	FINISH
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES
		QTY
		SEE NOTES

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
PART NUMBER: XB-104316902		TITLE: TYPE C单排16P 沉板1.6双壳舌片外漏 (B款)	
APPD:		DWG NO.: C-104316902-00	
CHKD:			SCALE
DR:			SHEET
			REV.
		1:1	A0

RoHS

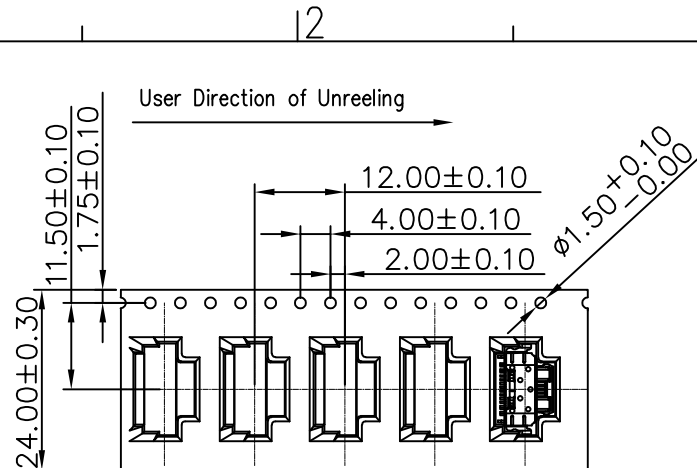


COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g

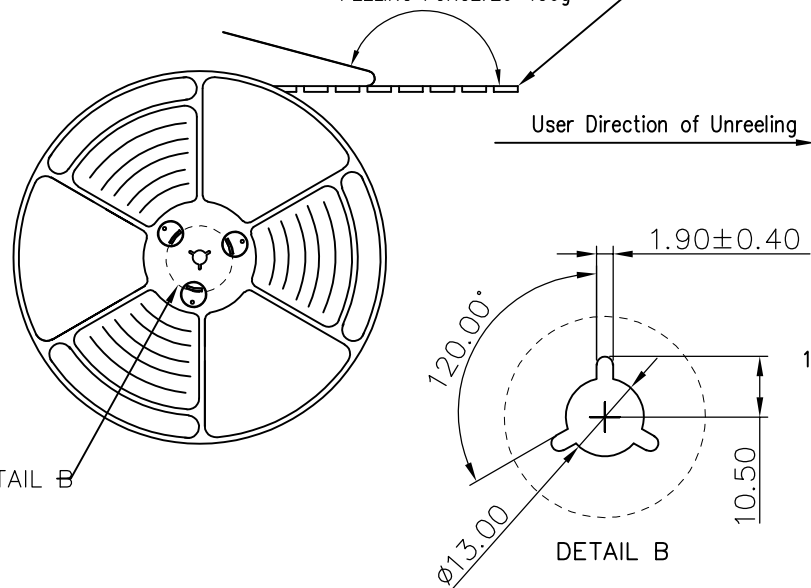


NOTES

1. NUMBER OF CONNECTORS:1500PCS/REEL
2. LEAD TAPE LENGTH

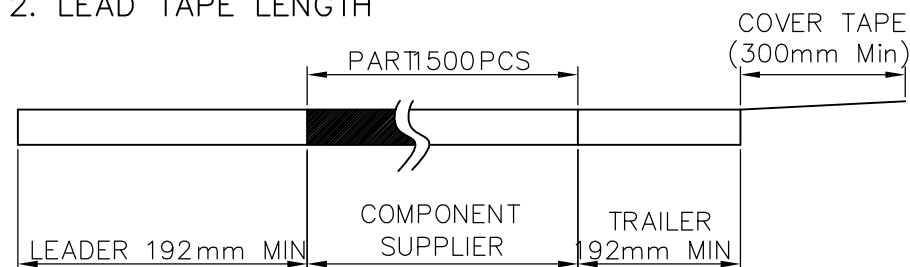

3.QUANTITY:15000PCS/CARTON

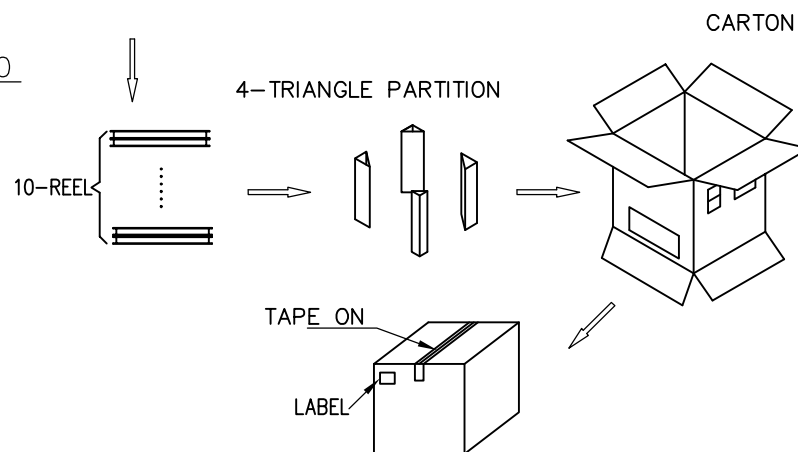

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X. [°] ± 2'	X. [°] ± 2'	MAT'L			
.X ± 0.38	.XX ± 0.015	SEE NOTES			
.XX ± 0.25	.XXX ± 0.010	FINISH			
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES			
		QTY	PART NUMBER:	TITLE:	
		SEE NOTES	XB-104316902	TYPE C单排16P 沉板1.6双壳舌片外漏 (B款)	
			APPD:	DWG NO.:	
			CHKD:	C-104316902-00	
		DR:			
			SCALE	SHEET	REV.
			1:1	2/2	A0