
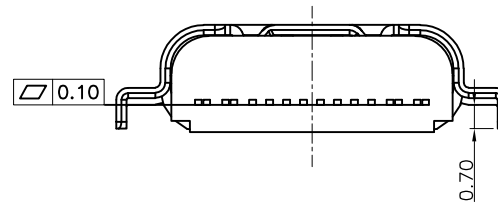

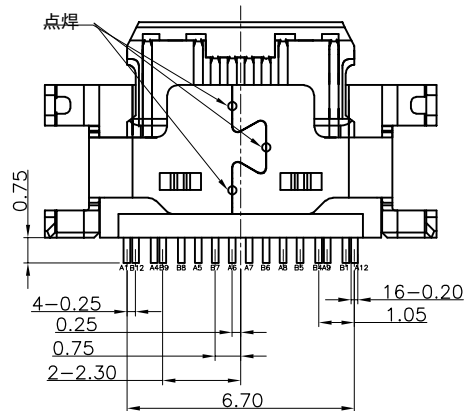
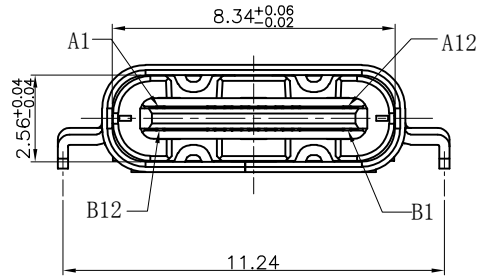


RoHS

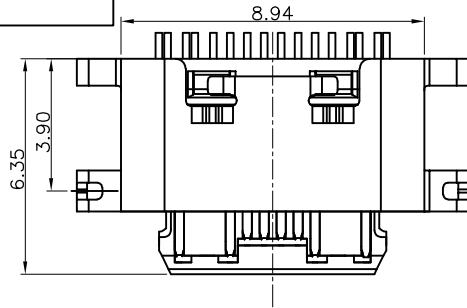


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	FY	/	MOON

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

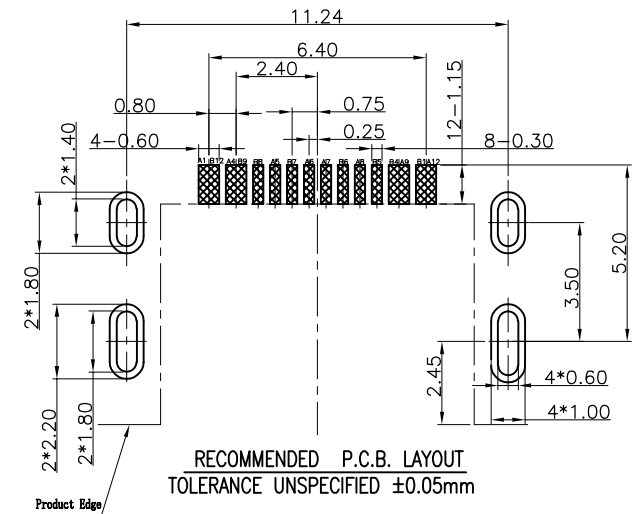

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm


6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	LCP	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	LCP	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER:	TITLE:
.X ± 0.38	.XX ± 0.015	SEE NOTES		XB-104317042	TYPE C 16PIN沉板0.8舌片外漏(点焊)
.XX ± 0.25	.XXX ± 0.010	FINISH		APPD:	DWG NO.:
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES		CHKD:	C-104317042-00
		QTY		DR:	
		SEE NOTES			

SCALE	SHEET	REV.
1:1	1/2	A0

RoHS

User Direction of Unreeling

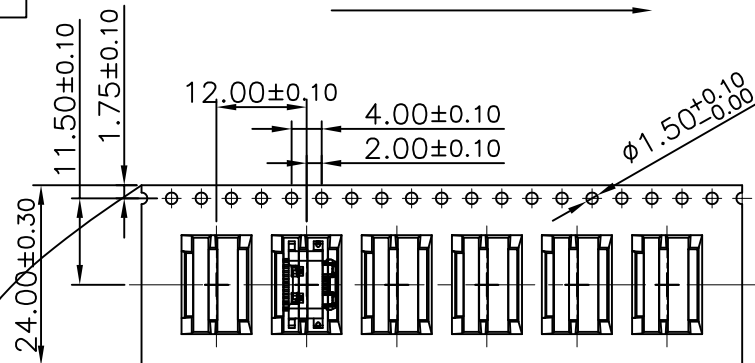


COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g

CARRIER TAPE


User Direction of Unreeling

DETAIL B

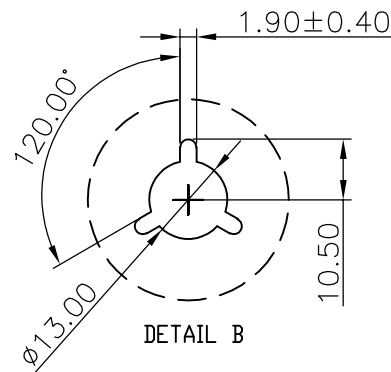


NOTES

1. NUMBER OF CONNECTORS:1500PCS/REEL
2. LEAD TAPE LENGTH

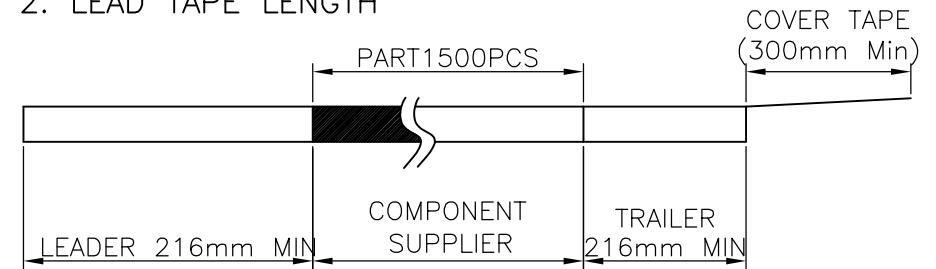

3. QUANTITY: 15000PCS/CARTON

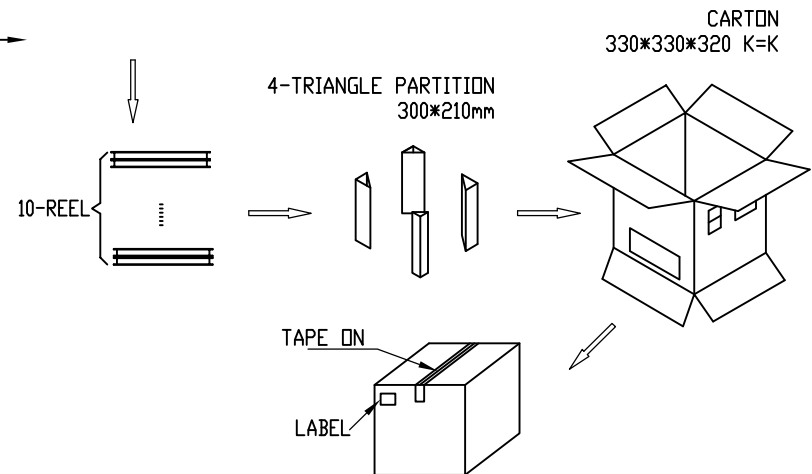

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
X° ± 2°	X° ± 2°	MAT'L						
.X ±0.30	.XX ±0.012	SEE NOTES						
.XX ±0.20	.XXX ±0.008	FINISH						
.XXX ±0.10	.XXXX ±0.004	SEE NOTES						
			PART NUMBER:	TITLE:				
			XB-104317042		TYPE C 16PIN沉板0.8舌片外漏(点焊)			
			APPD: MOON	DWG NO.:				
			C-104317042-00					
QTY			CHKD: --					
SEE NOTES			DR: FY					
					SCALE	SHEET	REV.	
					1:1	2/2	A0	