








RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	FY	/	MOON

NOTES:


SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

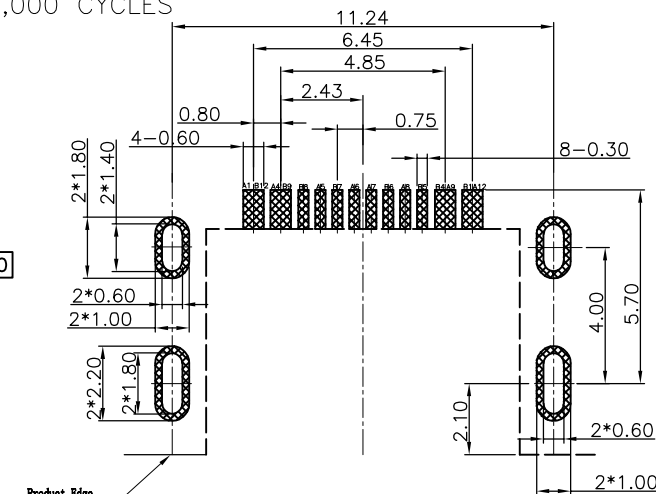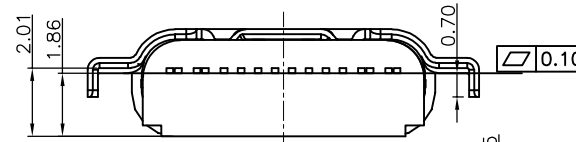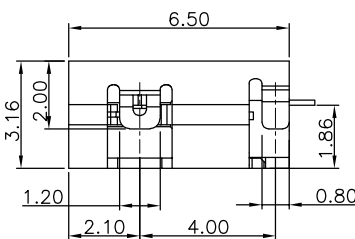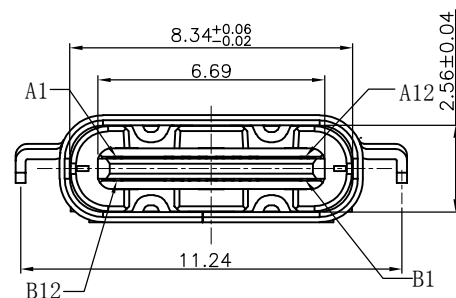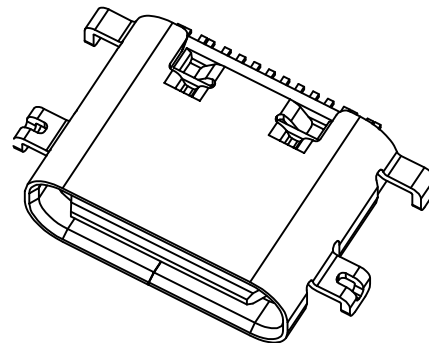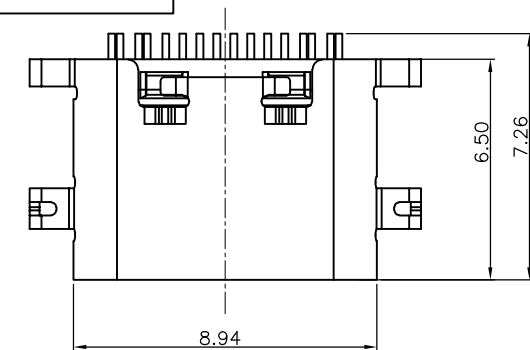

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	LCP	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	LCP	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

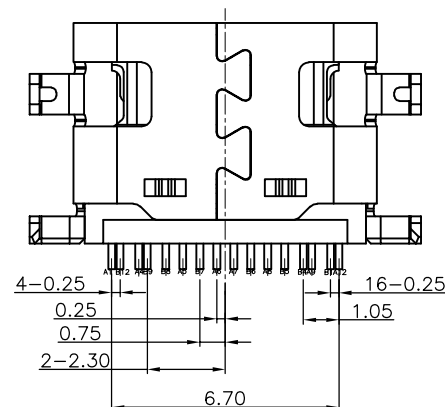

公母对插示意图

A1	GND	B12	GND	MILLIMETERS	INCH	UNITS
A4	VBUS	B9	VBUS	X* ± 2'	X* ± 2'	MM
A5	CC1	B8	SBU2	.X ± 0.38	.XX ± 0.015	MAT'L
A6	DP1	B7	DN2	.XX ± 0.25	.XXX ± 0.010	SEE NOTES
A7	DN1	B6	DP2	.XXX ± 0.15	.XXXX ± 0.006	FINISH
A8	SBU1	B5	CC2			SEE NOTES
A9	VBUS	B4	VBUS			QTY
A12	GND	B1	GND			SEE NOTES
PIN	SIGNAL NAME	PIN	SIGNAL NAME			


东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER: XB-104317052
TITLE: TYPE C 单排16PIN 沉板1.86 L=6.5

APPD: DWG NO.: C-104317052-00


CHKD: SCALE: 1:1
DR: SHEET: 1/2
REV: A0

RoHS



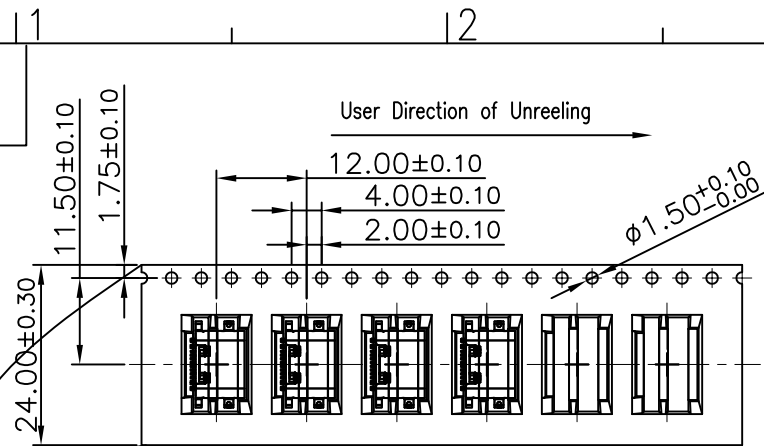


NOTES

1. NUMBER OF CONNECTORS: 1500PCS/REEL
2. LEAD TAPE LENGTH

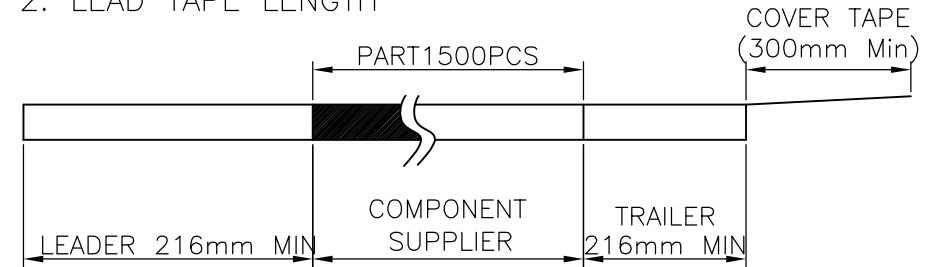

3. QUANTITY: 15000PCS/CARTON

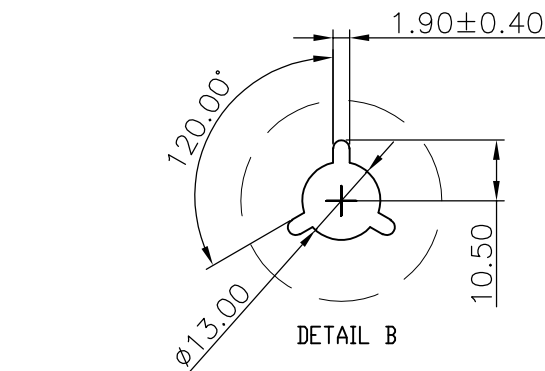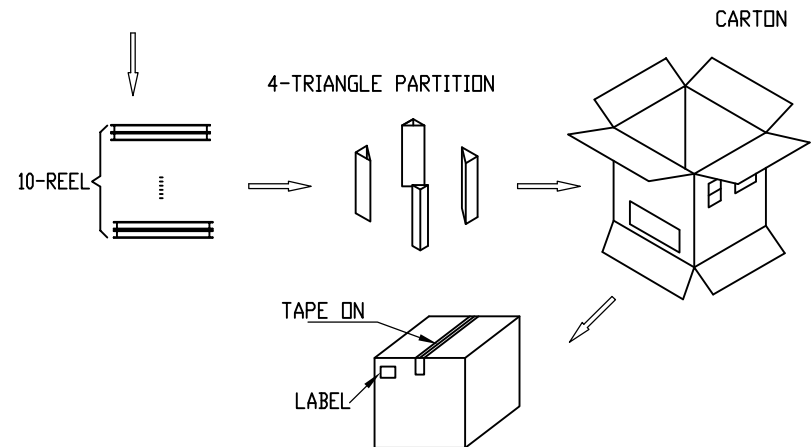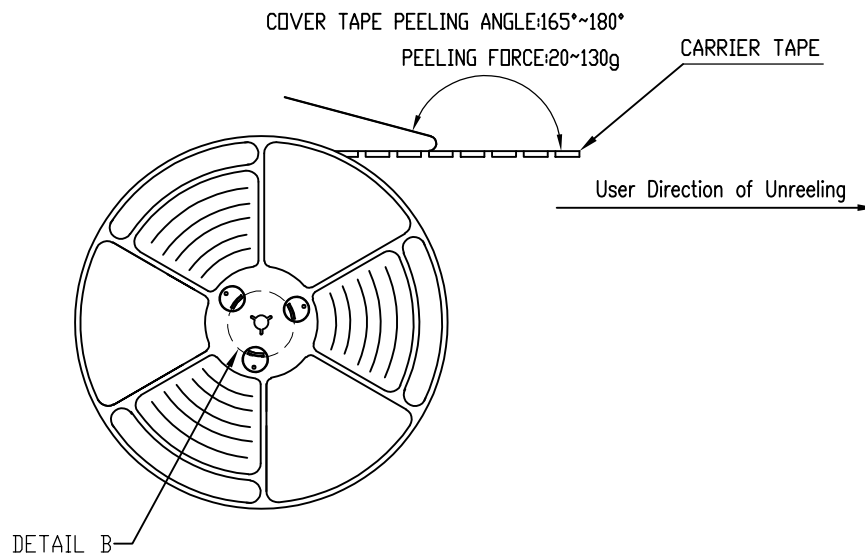

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司	
X.° ± 2°	X.° ± 2°	MAT'L		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
.X ± 0.30	.XX ± 0.012	SEE NOTES		PART NUMBER:	TITLE:
.XX ± 0.20	.XXX ± 0.008	FINISH		XB-104317052	TYPE C 单排16PIN 沉板1.86 L=6.5
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		APPD:	DWG NO.:
		QTY		CHKD:	C-104317052-00
		SEE NOTES		DR:	