

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	QST	/	MOON


NOTES:


SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. Salt spray: 24H






A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

7	OVER SHELL	STAINLESS STEEL SUS304	matte NI Plated	
6	SHELL	STAINLESS STEEL SUS304	matte NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL SUS301	---	1PCS
4	MD	PA9T	BLACK	1PCS
3	CONTACT	COPPER ALLOY C7025	Au 1U" /Ni/Au GF	1SET
2	CONTACT	COPPER ALLOY C7025	Au 1U" /Ni/Au GF	1SET
1	HOUSING	PA9T	PA9T-BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY


MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
X° ± 2'	X° ± 2'	MAT'L					
.X ± 0.38	.XX ± 0.015	SEE NOTES					
.XX ± 0.25	.XXX ± 0.010	FINISH					
.XXX± 0.15	.XXXX± 0.006	SEE NOTES					
		QTY					
		SEE NOTES					
			PART NUMBER: XB-104317192	TITLE: TYPE C 单排16P 母座 架高型CH=3.70			
			APPD:	DWG NO.: C-104317192-00			
			CHKD:		SCALE	SHEET	REV.
			DR:		1:1	1/2	A0

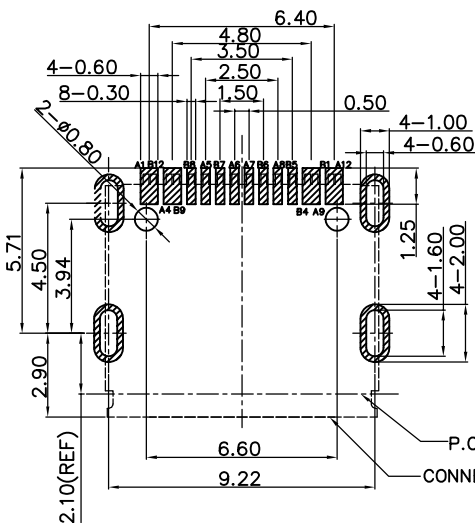

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

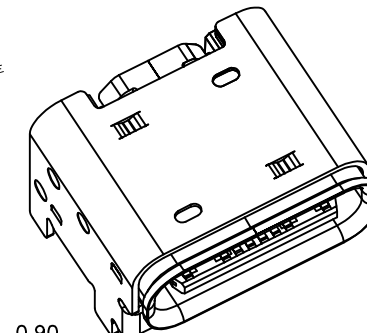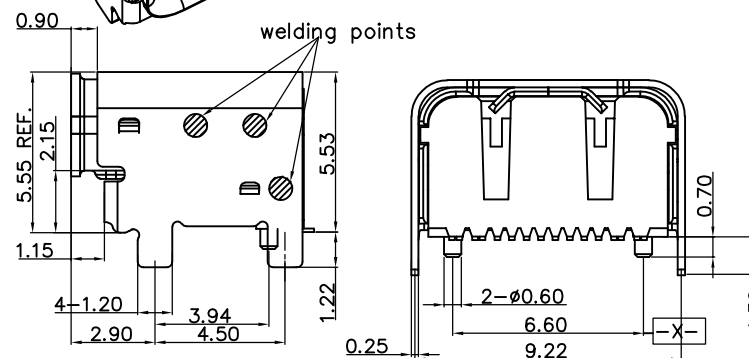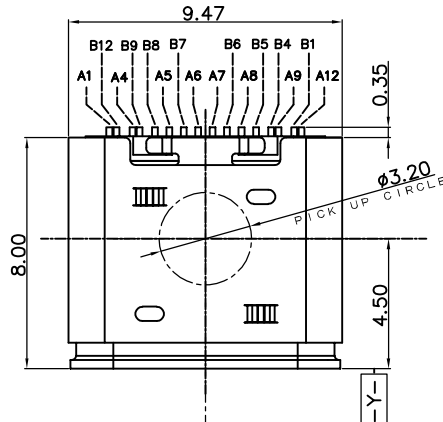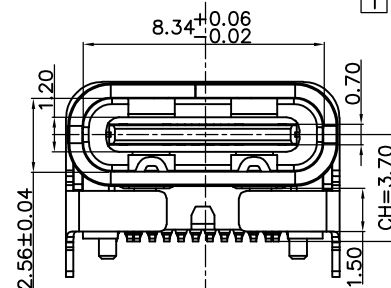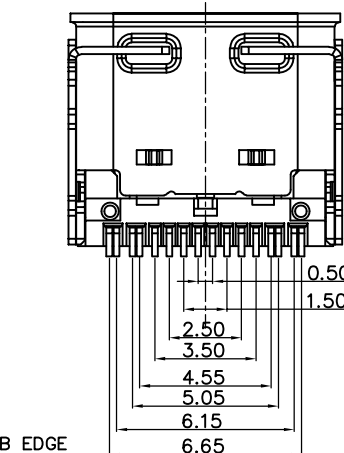


RoHS


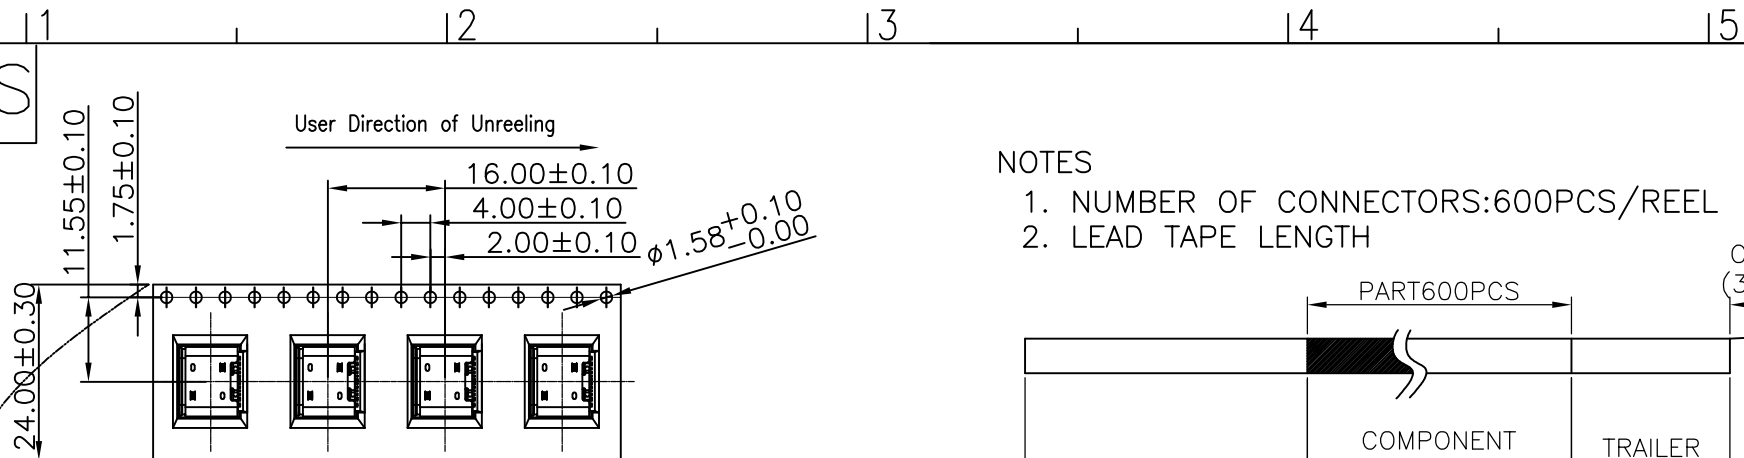


NOTES

1. NUMBER OF CONNECTORS: 600PCS/REEL
2. LEAD TAPE LENGTH

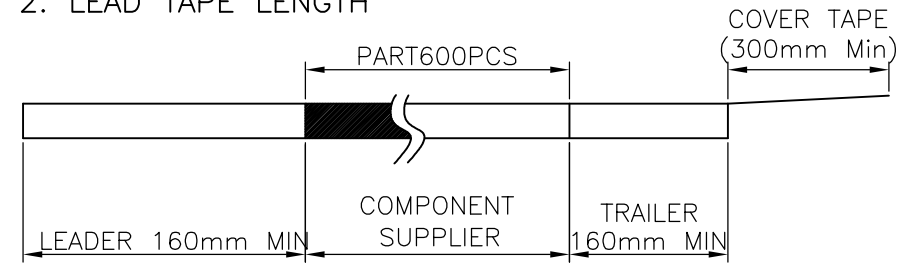

3. QUANTITY: 6000PCS/CARTON

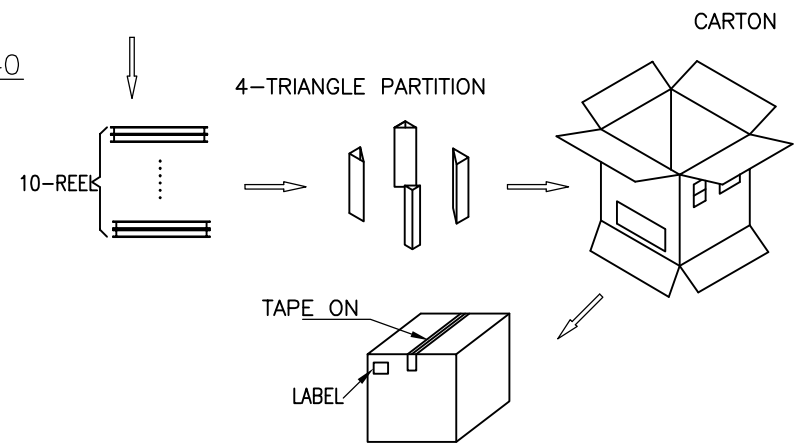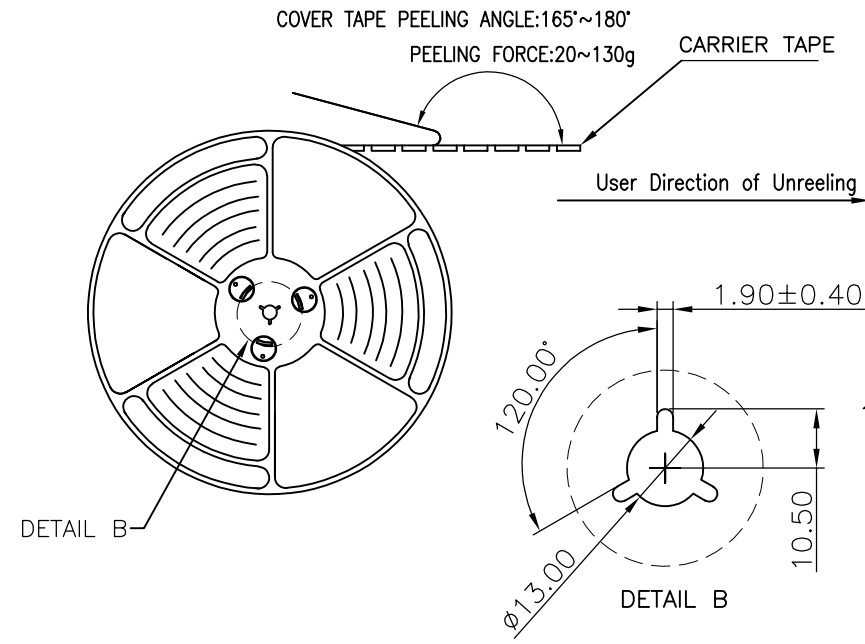

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司			
X° ± 2'	X° ± 2'	MAT'L		DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.38	.XX ± 0.015	SEE NOTES		PART NUMBER:		TITLE:	
.XX ± 0.25	.XXX ± 0.010	FINISH		XB-104317192		TYPE C 单排16P 母座 架高型CH=3.70	
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES		APPD:		DWG NO.:	
		QTY		CHKD:		C-104317192-00	
		SEE NOTES		DR:			
						SCALE	SHEET
						1:1	2/2
						REV.	A0