

规格书编号
J.SPC.50.59-001

XB-TVEJ16-035

2/10


5. 外形、结构:




平整度0.05Ma

2.65


$H (3.5) \pm 0.2$



P.C.B LAND DIMENSION



CIRCUIT DIAGRAM

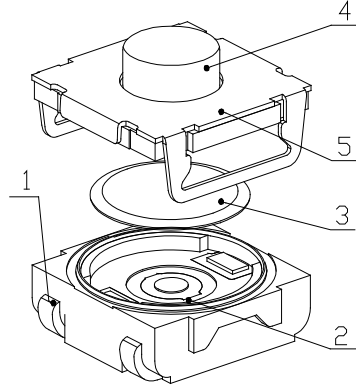

SPECIFICATION

1. Rating: DC 12V 50mA Max
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ Min
4. Dielectric strength: 250VAC/min
5. Operating force: 180gf±50gf
6. Operating life: 300,000 cycles

	5	COVER(盖板)		1	SUS		
	4	按钮(STEM)		1	橡胶		—
	3	CONTACT FURIN(弹片)		1	SUS		Ag plating
	2	HOUSING(基座)		1	PBT		
	1	TERMINAL(端子)		1	H65		Ag plating
	NO(序号)	PART NAME(部件名)		QTY(数量)	MATERIAL(材料)		REMARK(备注)
FRANCE	DRAWN 制 图	QW. HONG	DATE 日期	2018.09.12	SCALE: 20:1 比 例	ITEM 产 品 类 型	TACT SWITCH 轻触开关
0.5"	CHKD 审 核	GF. YANG	DATE 日期	2018.09.12	VIEW 视 图		PART NO 型 号
0.4	APVD 批 准	G.J. ZHAO	DATE 日期	2018.09.12	UNIT: mm 单 位	DWG. NO 图 号	XB-TVEJ16-035
0.2							J1. 5059.00-001