





RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	LH	/	MOON


- NOTES:
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. LNSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

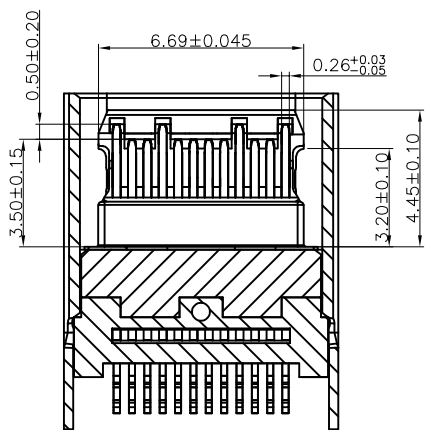

SECTION B-B

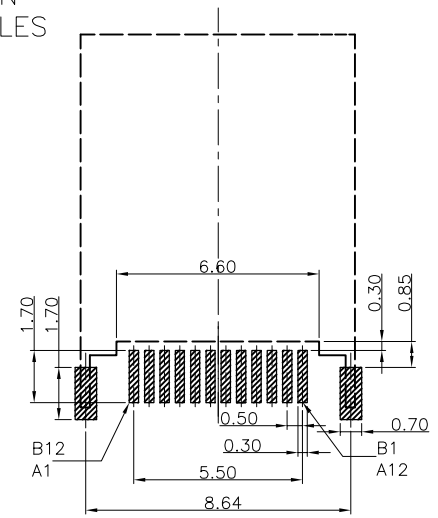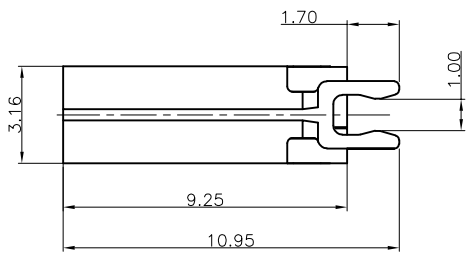

RECOMMENDED P.C.B. LAYOUT (T:0.8mm)
TOLERANCE UNSPECIFIED ±0.05mm

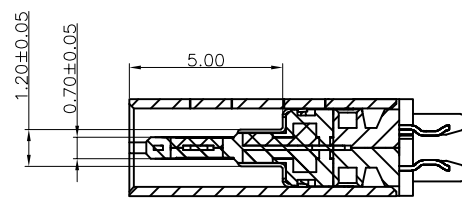

SECTION A-A

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1SET
3	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MILLIMETERS

INCH

UNITS

MM

X° ± 2°

X° ± 2°

MAT'L

.X ± 0.38

.XX ± 0.015

SEE NOTES

.XX ± 0.25

.XXX ± 0.010

FINISH

.XXX± 0.15

.XXXX± 0.006

SEE NOTES

QTY

SEE NOTES

QTY

XB 东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:

XB-104015363

TITLE:

TYPE C 24PIN夹板式1.0短体9.3 CONN.

APPD:

DWG NO.:

C-104015203-00

CHKD:

DR:

SCALE

1:1

SHEET



1/2

REV.



A0

RoHS

50PCS PRODUCTS PER TUBE

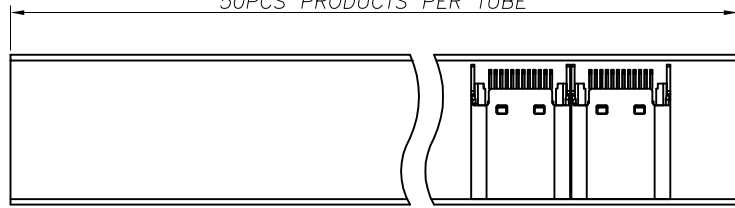


TUBE

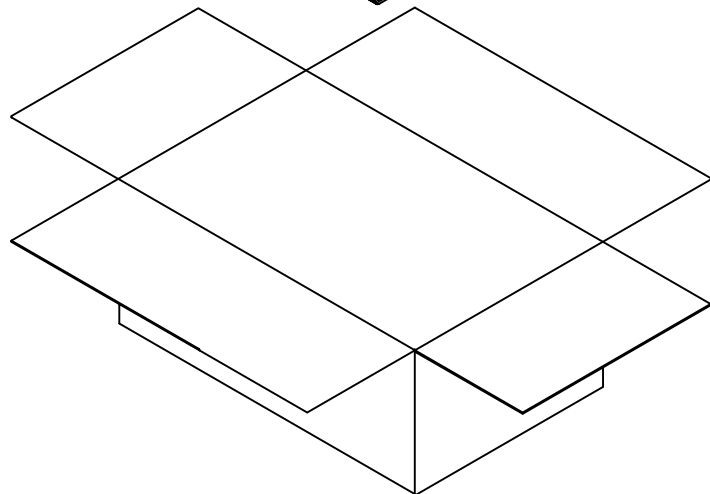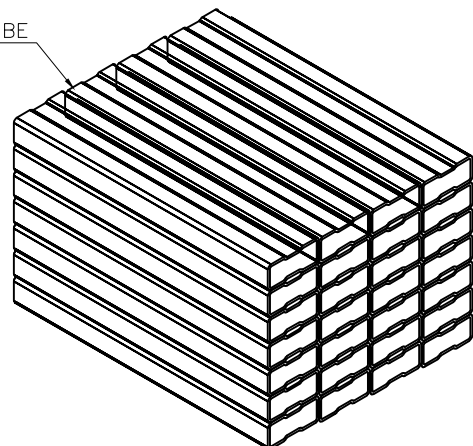

标签

CARTON

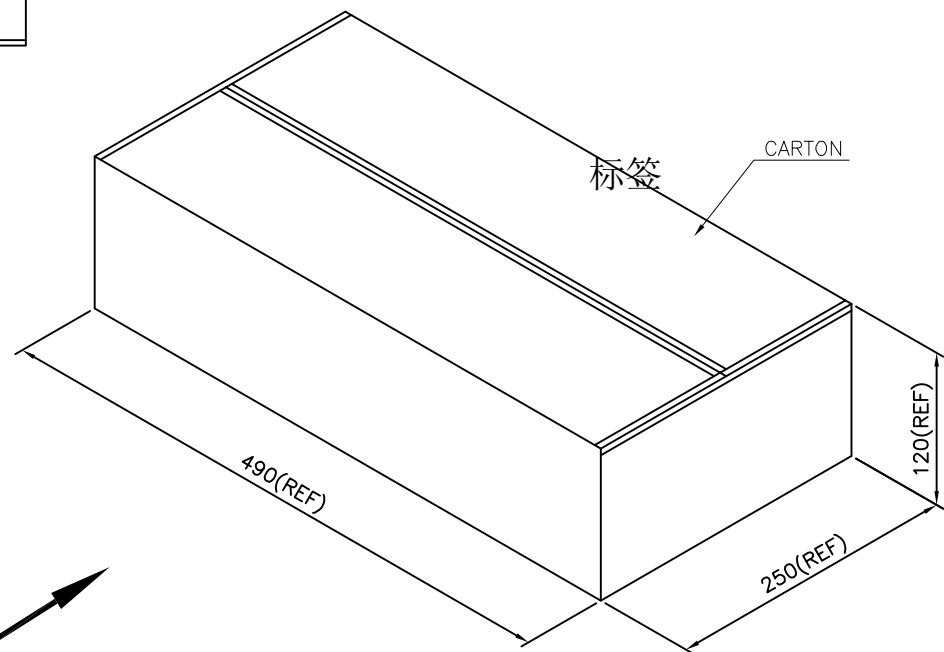

	TUBE	CARTON
CONNECTOR (PCS)	50	12000

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L					
.X ± 0.38	.XX ± 0.015	SEE NOTES					
.XX ± 0.25	.XXX ± 0.010	FINISH					
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES					
		QTY					
		SEE NOTES					
				PART NUMBER: XB-104015363		TITLE: TYPE C 24PIN夹板式1.0短体9.3 CONN.	
				APPD:		DWG NO.: C-104015203-00	
				CHKD:			
				DR:			
						SCALE 1:1	SHEET 1/2
						REV. A0	