

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	LH	/	MOON

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

SECTION B-B

RECOMMENDED P.C.B. LAYOUT (T:0.8mm)

TOLERANCE UNSPECIFIED ±0.05mm

SECTION A-A

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

MILLIMETERS	INCH
X° ± 2°	X° ± 2°
.X ± 0.38	.XX ± 0.015
.XX ± 0.25	.XXX ± 0.010
.XXX ± 0.15	.XXXX ± 0.006

UNITS	MM
MAT'L	
SEE NOTES	
FINISH	
SEE NOTES	
QTY	
SEE NOTES	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:
XB-104015213


APPD:

CHKD:

DR:

TITLE:
TYPE C 24PIN夹板式0.8短体8.8 CONN.

DWG NO.:
C-104015213-00





SCALE
1:1

SHEET
1/2



REV.
A0

RoHS

50PCS PRODUCTS PER TUBE

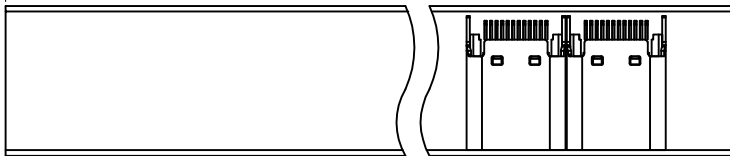


TUBE

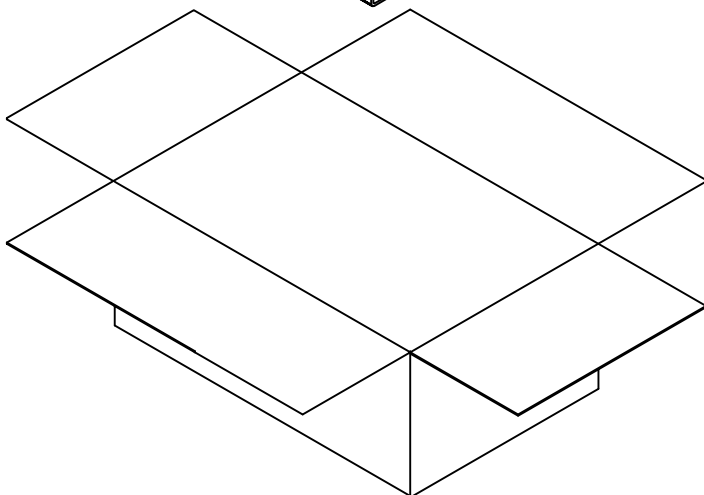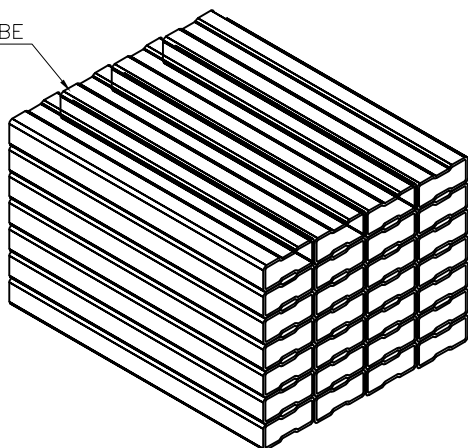

标签

CARTON

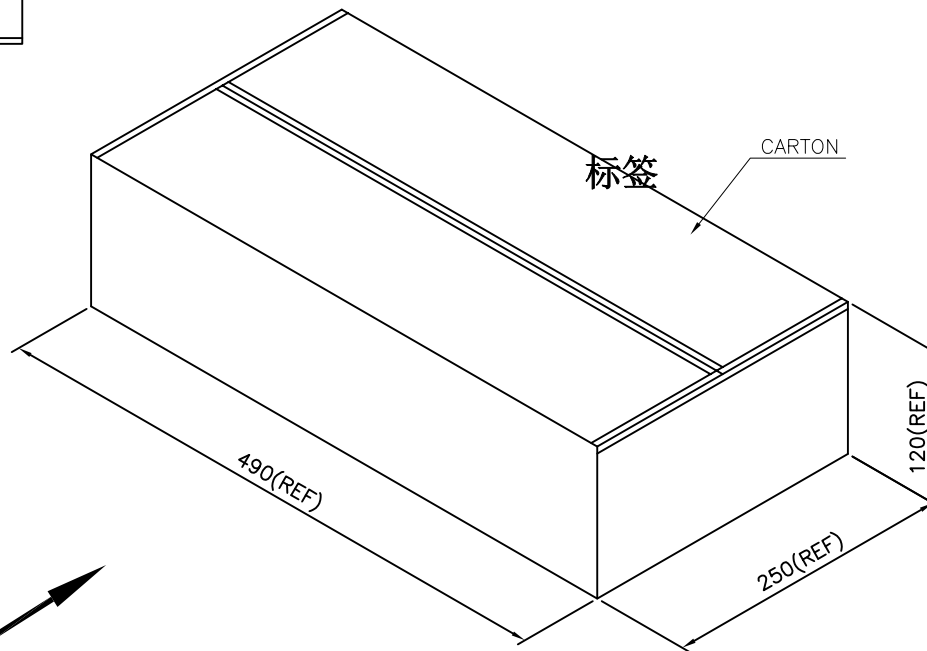

	TUBE	CARTON
CONNECTOR (PCS)	50	12000

MILLIMETERS	INCH	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
		MM					
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER: XB-104015213		TITLE: TYPE C 24PIN夹板式0.8短体8.8 CONN.		
.X ± 0.38	.XX ± 0.015	SEE NOTES					
.XX ± 0.25	.XXX ± 0.010	FINISH	APPD:		DWG NO.: C-104015213-00		
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES					
		QTY	CHKD:				
		SEE NOTES					
					SCALE	SHEET	REV.
					1:1	1/2	AO