
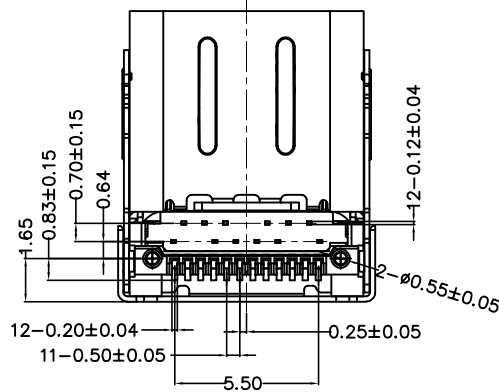

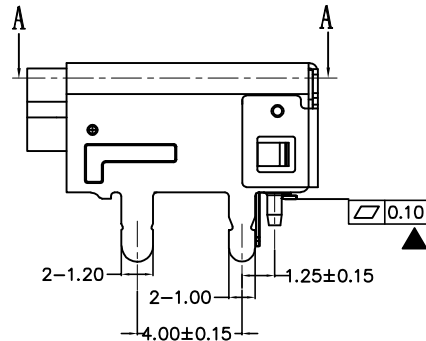
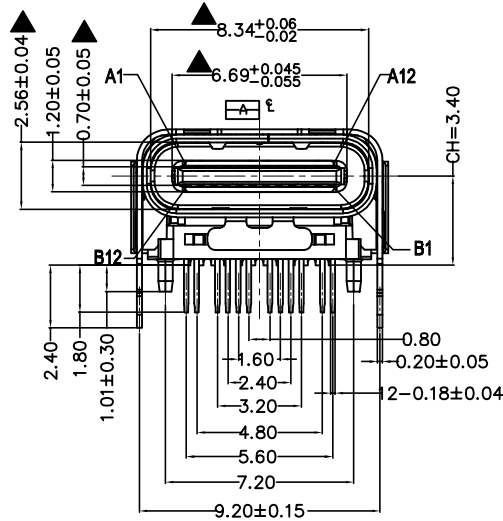
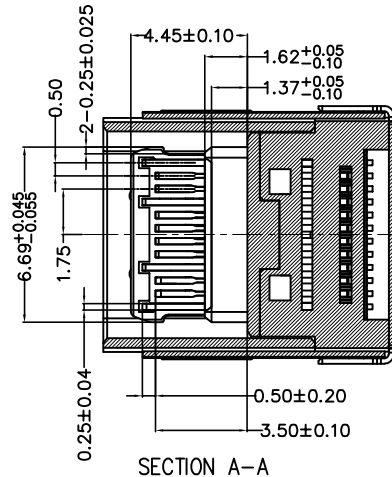


RoHS

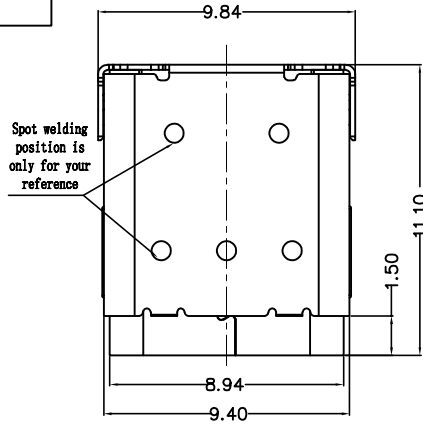

NOTES:

- 1.MATERIAL :SEE TABLE
- 2.COPLANARITY : 0.10 Max.
- 3.ELECTRICAL CHARACTERISTICS
LOW LEVEL CONTACT RESISTANCE: 40mΩ Max
INSULATION RESISTANCE:100MΩ MIN
DIELECTRIC WITHSTANDING VOLTAGE:100 VAC:
CONTACT CURRENT RATING:5A Max
- 4.MECHANICAL CHARACTERISTICS
INSERTION FORCE: 5~20N
EXTRACTION FORCE: 8~20N
AFTER DURABILITY EXTRACTION FORCE: 6~20N
- 5.DURABILITY: 10000 CYCLES
- 6.PACKAGING TYPE: CARRIER TAPE.
- 7.OPERATING TEMPERATURE: -30°C~+85°C
- 8."▲"CPK尺寸

PART No.:

USB SERIES 104015892
PLATING: 01: Au1u"+Matte Tin
PAKING: 2: REEL
SERIAL NO.


MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER:	TITLE:
.X ± 0.30	.XX ± 0.012	SEE NOTES		XB-104015892	TYPE C 24PIN 前插后贴 垫高3.40MM 脚长1.8
.XX ± 0.20	.XXX ± 0.008	FINISH		APPD:	DWG NO.:
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		CHKD:	C-104015892-00
		QTY		DR:	
		SEE NOTES			

SCALE	SHEET	REV.
1:1	1/3	A0


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	02/12'21	TXF	/	MOON

Pin No	Signal Name	Mating Sequence	Pin No	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	TX1+	Second	B11	RX1+	Second
A3	TX1-	Second	B10	RX1-	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBU2	Second
A6	D+	Second	B7	D-	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	RX2-	Second	B3	TX2-	Second
A11	RX2+	Second	B2	TX2+	Second
A12	GND	First	B1	GND	First
SHELL		GND	SHELL		GND

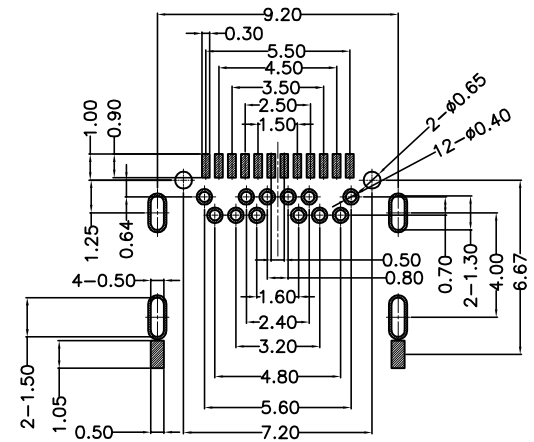

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
PCB THICKNESS: 2.0±0.05mm

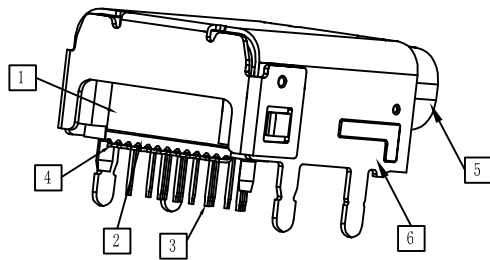


6	OUTER-SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
5	INNER-SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
4	TOP TERMINAL	1	COPPER ALLOY	MATING AREA: AU 1U" SOLDER TAIL: MATTE TIN 60 MIN, 30U" NICKEL OVERALL.
3	BOTTOM TERMINAL	1	COPPER ALLOY	MATING AREA: AU 1U" SOLDER TAIL: MATTE TIN 60 MIN, 30U" NICKEL OVERALL.
2	MID PLATE	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
1	MAIN HOUSING	1	HIGH TEMPERATURE	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
BILL OF MATERIAL				

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MM				
.X ± 0.30	.XX ± 0.012	MAT'L				
.XX ± 0.20	.XXX ± 0.008	SEE NOTES				
.XXX ± 0.10	.XXXX ± 0.004	FINISH				
		SEE NOTES				
		QTY				
		SEE NOTES				
		DR:				
		CHKD:				
		APPD:				
		DR:				
		SCALE				
		SHEET				
		REV.				

RoHS

User Direction of Unreeling

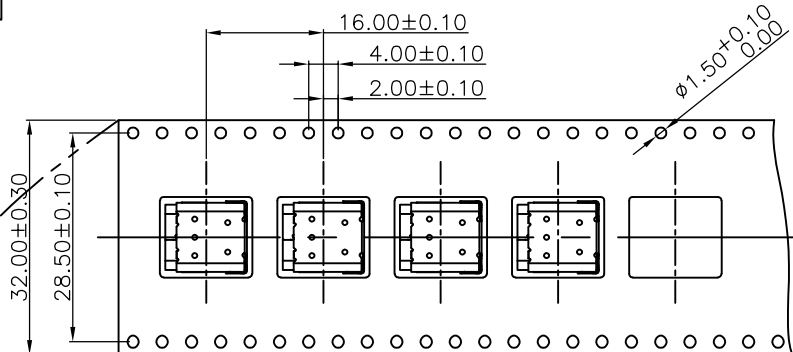

COVER TAPE PEELING ANGLE:165°~180°

PEELING FORCE:20~130g

CARRIER TAPE

User Direction of Unreeling


DETAIL B

DETAIL B

NOTES


1. NUMBER OF CONNECTORS:500PCS/REEL

2. LEAD TAPE LENGTH

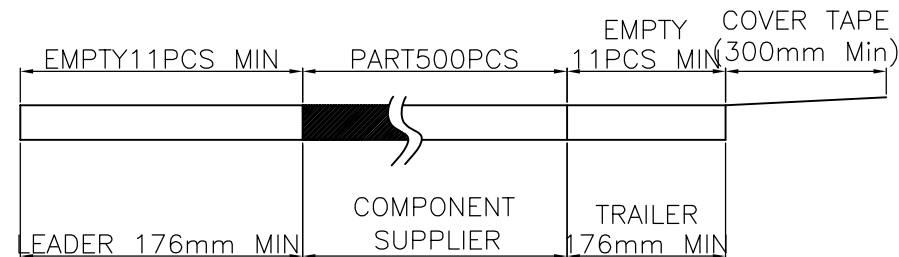

3. QUANTITY: 5000PCS/CARTON

CARTON
340*340*380mm K=K

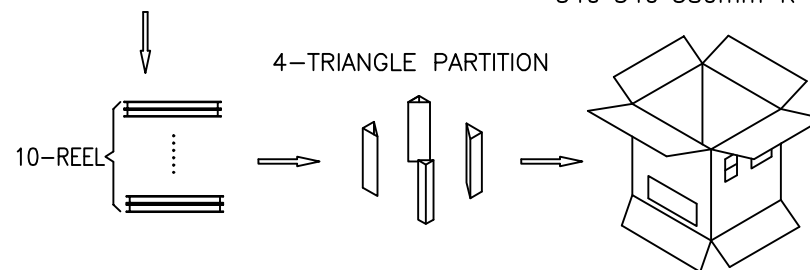

TAPE ON

LABEL

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X° ± 2°	X° ±	MAT'L		PART NUMBER:	TITLE:
.X ± 0.38	.XX ±	SEE NOTES		XB-104015892	TYPE C 24PIN 前插后贴 垫高3.40MM 脚长1.8
.XX ± 0.25	.XXX ±	FINISH		APPD:	DWG NO.:
.XXX ± 0.15	.XXXX ±	SEE NOTES		CHKD:	C-104015892-00
		QTY		DR:	
		SEE NOTES			