



RoHS


REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	TXF	/	MOON

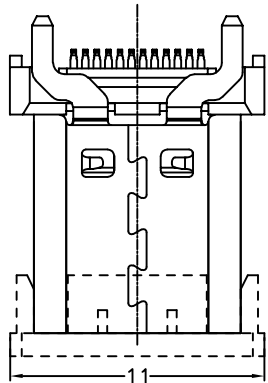




(COVER尺寸)




WITHOUT COVER

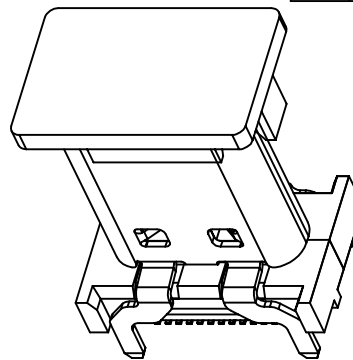

WITH COVER

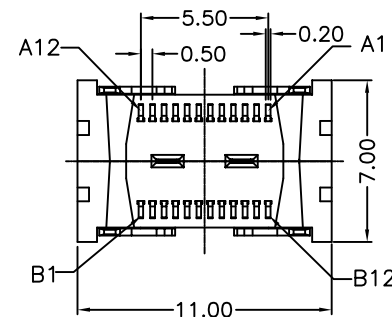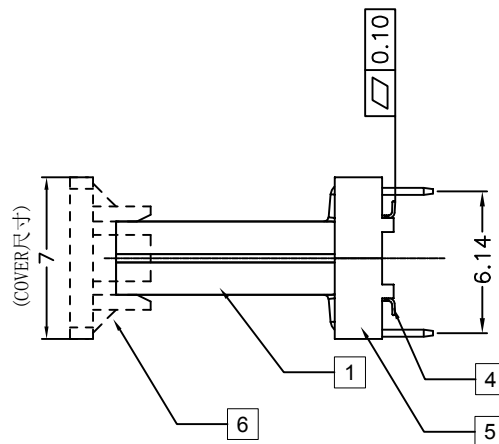

- 1.Contact Resistance:40mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST;
- 5.Durability:10000 Cycles;

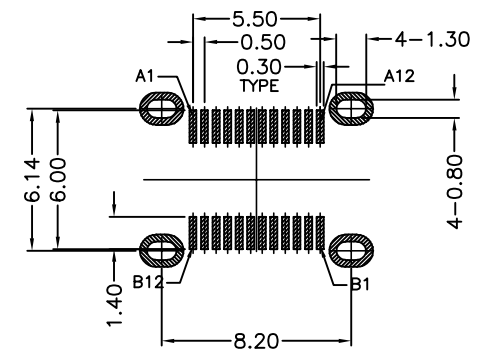

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA

Item	Title	Material	Dispose	Q'TY
1	Shell	Stainless Steel	Ni:30u" Min.	1PCS
2	GND Plate	Stainless Steel		2PCS
3	Mid Plate	Stainless Steel		1PCS
4	Contact	Copper Alloy	Mating Area: G/F Solder Tails: Matt Tin	2PCS
5	InsertMolding	LCP	UL 94V-0 Black	1PCS
6	COVER	LCP	UL 94V-0 Black	1PCS

MILLIMETERS	INCH	UNITS	MM
X° ± 2'	X° ± 2'	MAT'L	
.X ± 0.38	.XX ± 0.015	SEE NOTES	
.XX ± 0.25	.XXX ± 0.010	FINISH	
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES	
		QTY	
		SEE NOTES	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:
XB-104017932TITLE:
TYPE C 24P 直立式 SMT 无柱 H12.0mm

APPD:


DWG NO.:
C-104017932-00

CHKD:

SCALE	SHEET	REV.
1:1	1/2	A0


DR:

RoHS


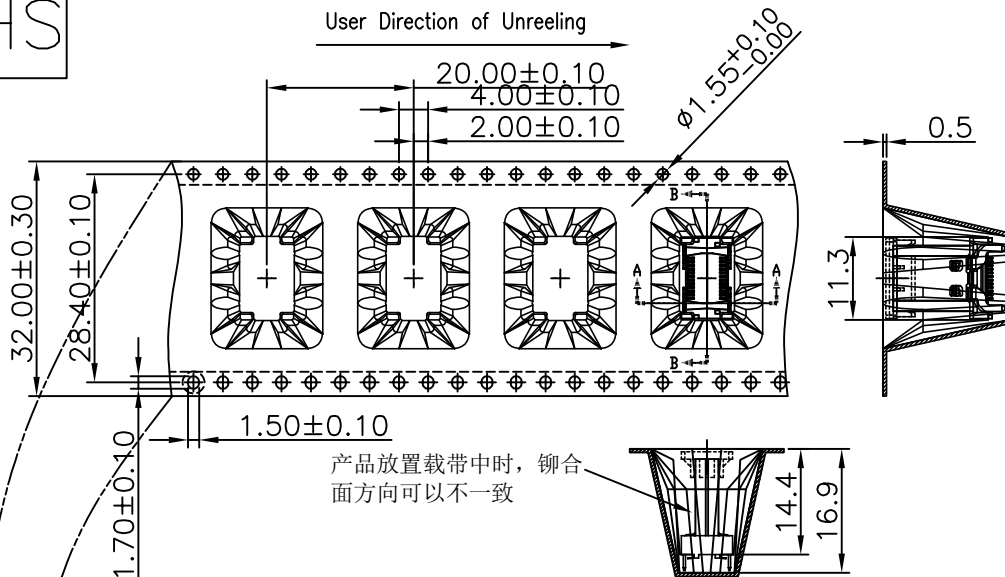



NOTES

1. NUMBER OF CONNECTORS: 250PCS/REEL
2. LEAD TAPE LENGTH

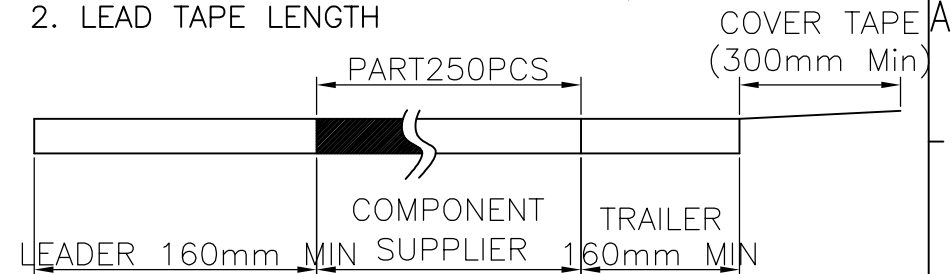

3. QUANTITY: 2000PCS/CARTON

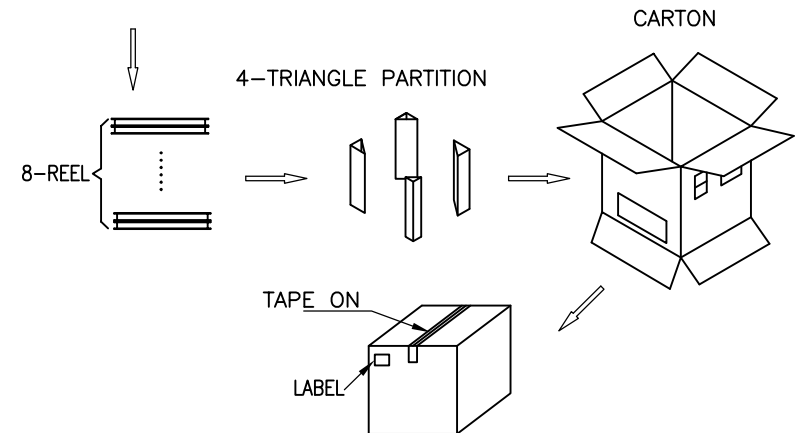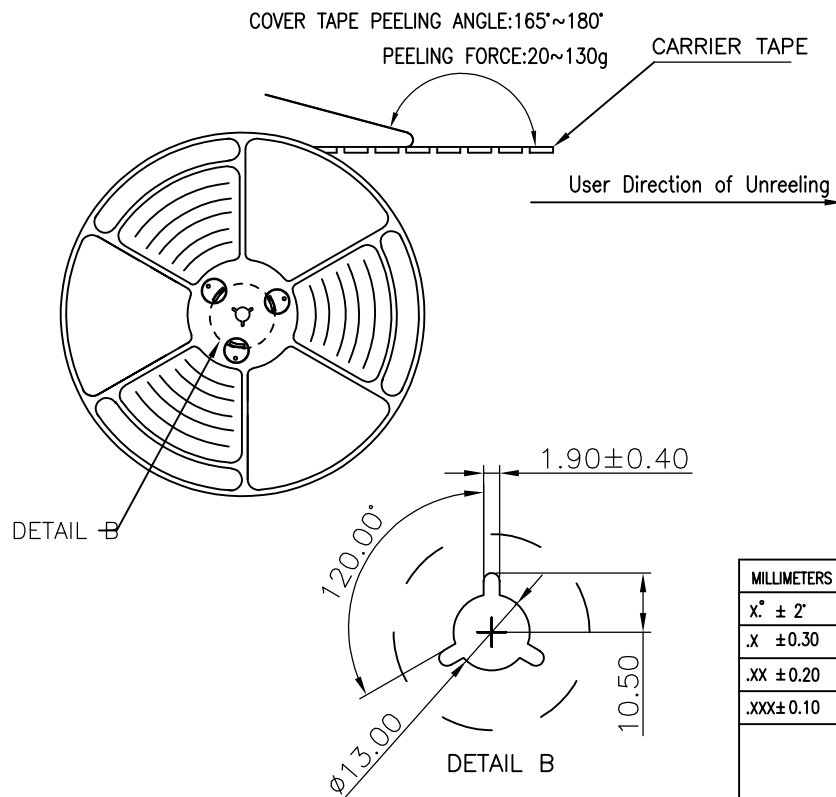

MILLIMETERS		INCH		UNITS		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
				MM						
X° ± 2°		X° ± 2°		MAT'L		PART NUMBER:		TITLE:		
.X ± 0.30		.XX ± 0.012		SEE NOTES						
.XX ± 0.20		.XXX ± 0.008		FINISH		XB-104017932		TYPE C 24P直立式SMT 无柱 H12.0mm		
.XXX ± 0.10		.XXXX ± 0.004		SEE NOTES						
				QTY		APPD:		DWG NO.:		
				SEE NOTES		CHKD:		C-104017932-00		
						DR:				
								SCALE	SHEET	REV.
								1:1	2/2	A0