
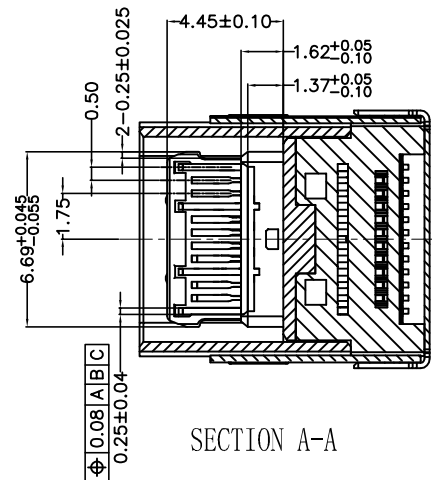


RoHS




REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	02/12'21	JY	/	MOON

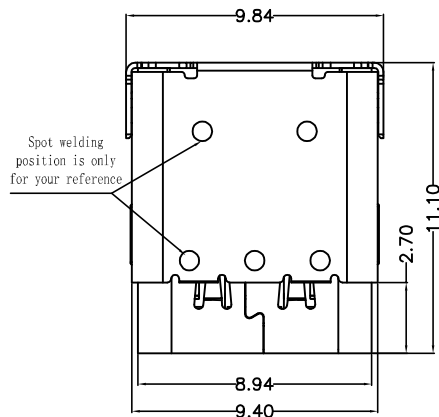

SECTION A-A

NOTES:

- 1.MATERIAL :SEE TABLE
- 2.COPLANARITY : 0.10 Max.
- 3.ELECTRICAL CHARACTERISTICS
LOW LEVEL CONTACT RESISTANCE: 40mΩ Max
INSULATION RESISTANCE:100MΩ MIN
DIELECTRIC WITHSTANDING VOLTAGE:100 VAC:
CONTACT CURRENT RATING:5A Max
- 4.MECHANICAL CHARACTERISTICS
INSERTION FORCE: 5~20N
EXTRACTION FORCE: 8~20N
AFTER DURABILITY EXTRACTION FORCE: 6~20N
- 5.DURABILITY: 10000 CYCLES
- 6.PACKAGING TYPE: CARRIER TAPE.
- 7.SALT SPRAY : 24 HOURS

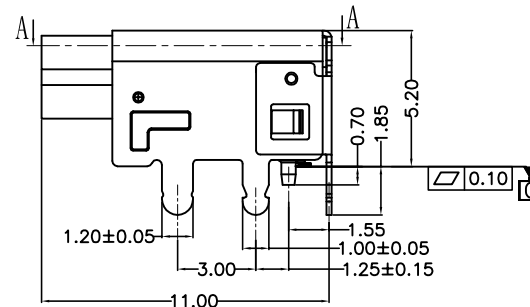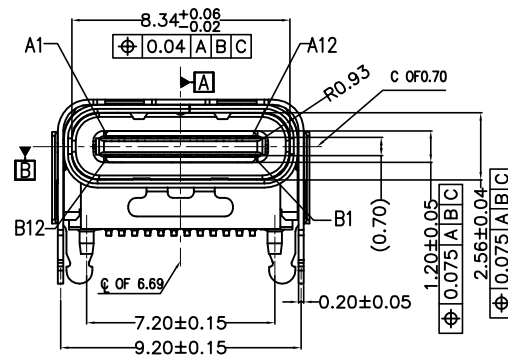

PART No.:


104XX6642
USB SERIES
PLATING: 01: Au1u" + Matte Tin
15: Au15u" + Matte Tin
PAKING: 2: REEL
SERIAL NO.

MILLIMETERS		INCH		UNITS		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
X° ± 2°		X° ± 2°		MM						
.X ± 0.30		.XX ± 0.012		MAT'L		PART NUMBER:		TITLE:		
.XX ± 0.20		.XXX ± 0.008		SEE NOTES		XB-104156642		TYPE C 24PIN 双排SMT 垫高3.40MM(外壳6脚)		
.XXX ± 0.10		.XXXX ± 0.004		FINISH		APPD:		DWG NO.:		
				SEE NOTES				C-104016642-00		
				QTY		CHKD:				
				SEE NOTES		DR:				
								SCALE	SHEET	REV.
								1:1	1/3	A0


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	02/12'21	JY	/	MOON

Pin No	Signal Name	Mating Sequence	Pin No	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	TX1+	Second	B11	RX1+	Second
A3	TX1-	Second	B10	RX1-	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBU2	Second
A6	D+	Second	B7	D-	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	RX2-	Second	B3	TX2-	Second
A11	RX2+	Second	B2	TX2+	Second
A12	GND	First	B1	GND	First
SHELL		GND	SHELL		GND

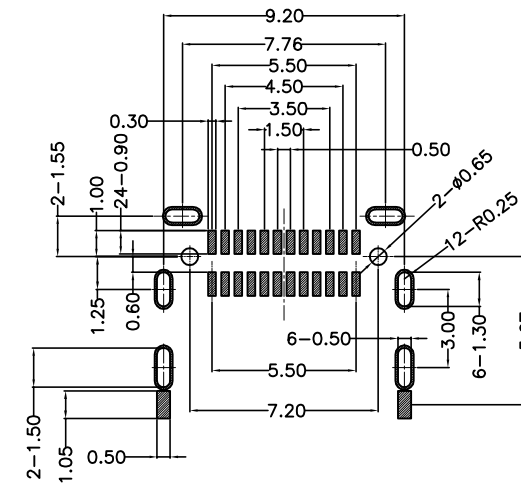

6	OUTER-SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
5	INNER-SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
4	TOP TERMINAL	1	COPPER ALLOY	MATING AREA:AU 3u" SOLDER TAIL:MATTE TIN 50 MIN, 50u" NICKEL OVERALL.
3	BOTTOM TERMINAL	1	COPPER ALLOY	MATING AREA:AU 3u" SOLDER TAIL:MATTE TIN 50 MIN, 50u" NICKEL OVERALL.
2	MID PLATE	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
1	MAIN HOUSING	1	HIGH TEMPERATURE	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
BILL OF MATERIAL				

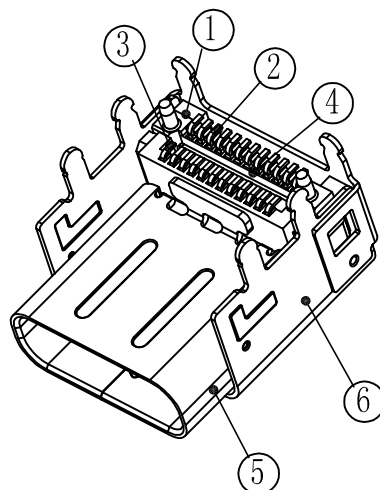


MILLIMETERS	INCH	UNITS	MM	TITLE	
X° ± 2'	X° ± 2'	MAT'L		TYPE C 24PIN 双排SMT 垫高3.40MM(外壳6脚)	
.X ±0.30	.XX ±0.012	SEE NOTES		DWG NO.: C-104016642-00	
.XX ±0.20	.XXX ±0.008	FINISH		SCALE 1:1	
.XXX±0.10	.XXXX±0.004	SEE NOTES		SHEET 2/3	
		QTY		REV. A0	
		SEE NOTES			

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:	XB-104156642
APPD:	
CHKD:	
DR:	

RoHS

User Direction of Unreeling

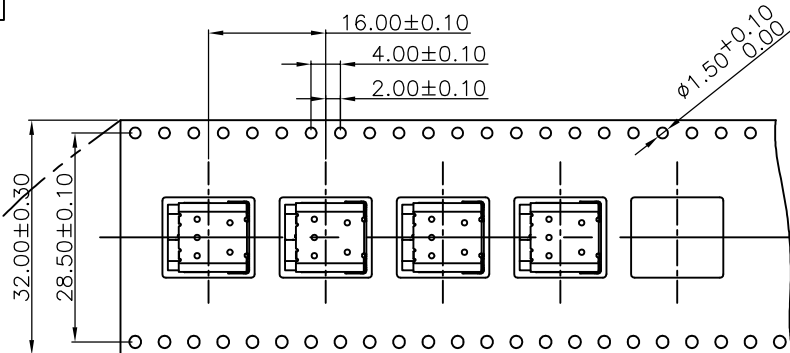


COVER TAPE PEELING ANGLE:165°~180°

PEELING FORCE:20~130g

CARRIER TAPE

User Direction of Unreeling


DETAIL B

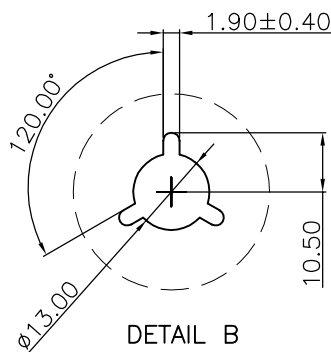


NOTES

1. NUMBER OF CONNECTORS:500PCS/REEL

2. LEAD TAPE LENGTH

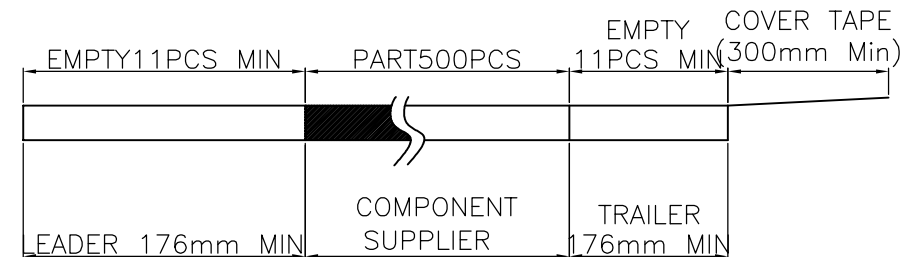

3. QUANTITY: 5000PCS/CARTON

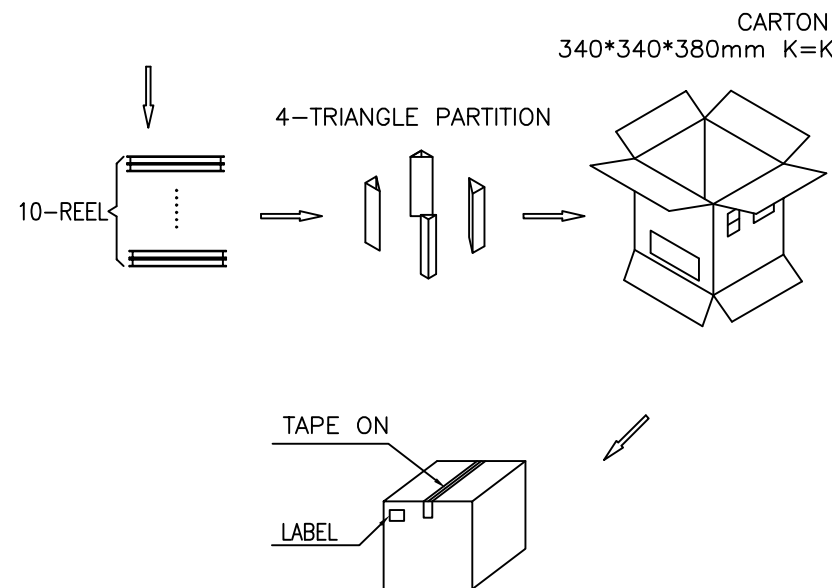

MILLIMETERS	INCH	UNITS	MM	XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER: XB-104156642		TITLE: TYPE C 24PIN 双排SMT 垫高3.40MM (外壳6脚)	
.X ± 0.30	.XX ± 0.012	SEE NOTES		APPD:		DWG NO.: C-104016642-00	
.XX ± 0.20	.XXX ± 0.008	FINISH		CHKD:		SCALE	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		DR:		SHEET	
		QTY				REV.	
		SEE NOTES				1:1	
						3/3	
						A0	