
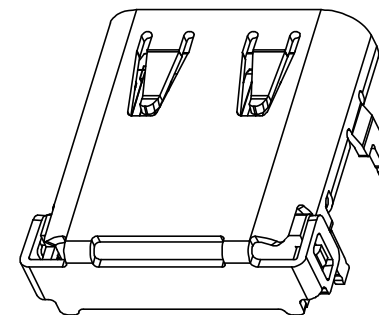
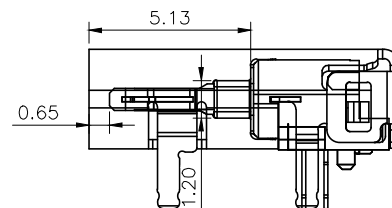


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'21	YSH	/	MOON

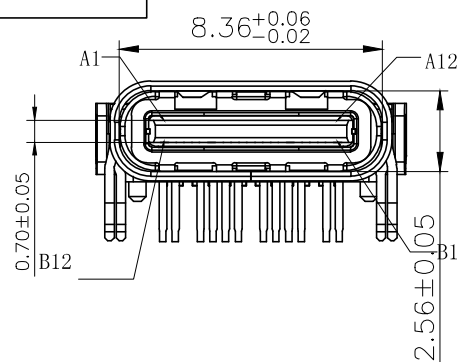

备注:

1.材质:

1.1 胶芯: LCP+30%G.F UL94V-0

1.2 端子：高导铜C7025，T=0.15mm；镍底50U” MIN，
接触区域镀金（AU 1u”）焊接区镀金G/F

1.3 外壳: SUS304, T=0.30mm; 表面镀镍30U" MIN

1.4 中夹片: SUS301, $T=0.15\text{mm}$:

2.主要特性:

2.1额定电流: 5A

2.2接触阻抗: 40mΩE MAX(初始值)

50mΩ MAX(测试后)

2.3绝缘阻抗: 100M Ω MIN

2.4耐压测试: 100V AC R.M.S.

2.6整体插入力: 5-20N 整体插入力: 5-20N (耐久后)

整体拔出力:8-20N 整体拔出力:6-20N (耐久后)

2.7耐久: 10000次






2.8耐高温：SMT 回流焊（峰值 $260^{\circ}\pm 5^{\circ}$ ），塑胶不能有起
泡，

融胶等不良,变色,翘曲变形在公差范围以内;

2.9产品须做焊锡测试,粘锡面积达到95%以上;

3.0盐雾测试: 48H MIN

3.1 工作温度: $-30^{\circ}\text{C} \sim +85^{\circ}\text{C}$

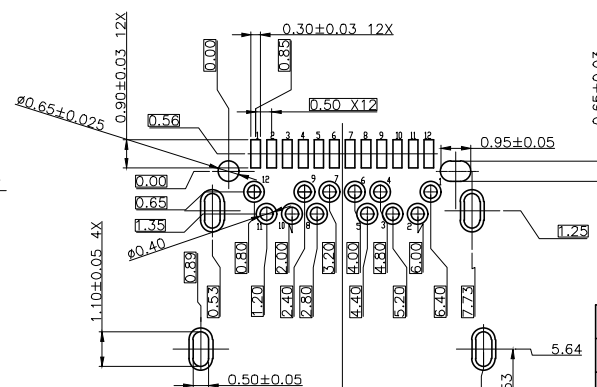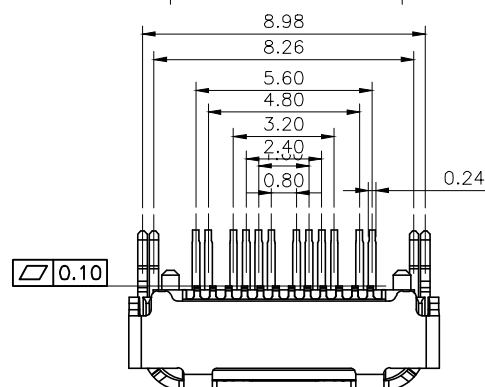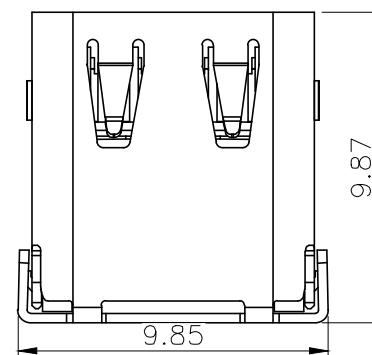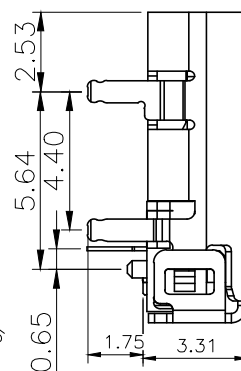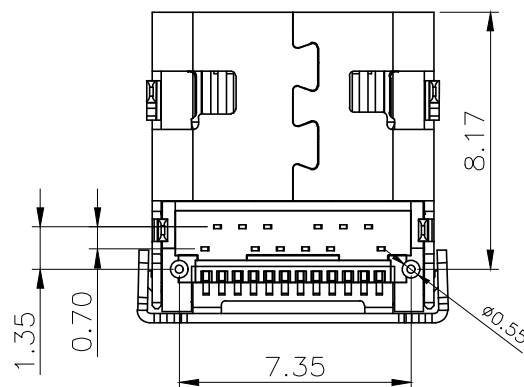CONNECTOR
FRONT EDGE

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

MILLIMETERS	INCH	UNITS
$X^{\circ} \pm 2^{\circ}$	$X^{\circ} \pm 2^{\circ}$	MM
$.X \pm 0.38$	$.XX \pm 0.015$	MAT'L
$.XX \pm 0.25$	$.XXX \pm 0.010$	SEE NOTES
$.XXX \pm 0.15$	$.XXXX \pm 0.006$	FINISH
		SEE NOTES
		QTY
		SEE NOTES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:	
	XB-104318022

TITLE:
TYPE C 24P前插后贴9.87板上型(长脚脚长1.75)

APPD:


DWG NO.:	C-104318022-00
----------	----------------

	CHKD
--	------

SCALE	SHEET	REV.
1:1	1/2	A0

RoHS

User Direction of Unreeling

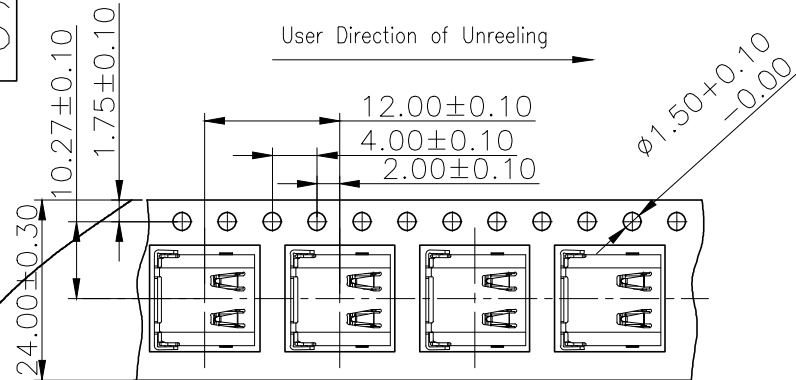

COVER TAPE PEELING ANGLE:165°~180°

PEELING FORCE:20~130g

CARRIER TAPE


User Direction of Unreeling

DETAIL B

DETAIL B


NOTES


1. NUMBER OF CONNECTORS:1000PCS/REEL
2. LEAD TAPE LENGTH

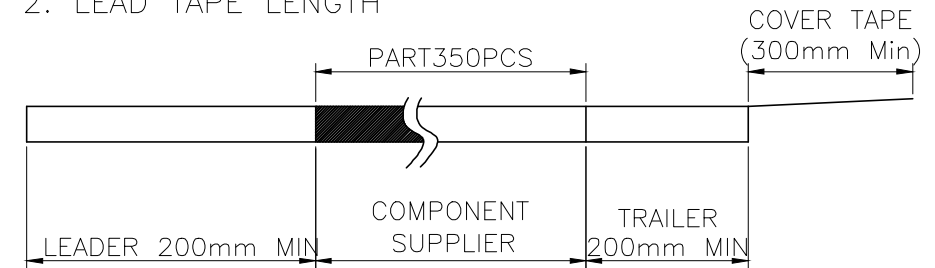

3. QUANTITY:10000PCS/CARTON

CARTON

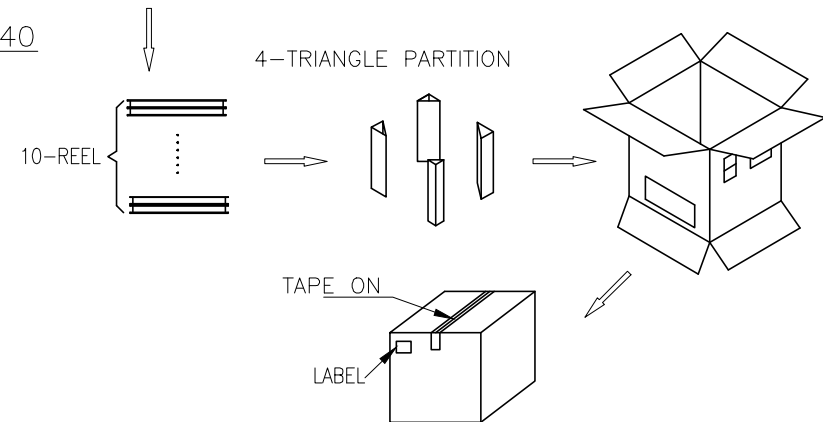

MILLIMETERS	INCH	UNITS MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2'	X° ± 2'	MAT'L	PART NUMBER: XB-104318022		TITLE: TYPE C 24P前插后贴9.87板上型(长脚脚长1.75)	
.X ± 0.30	.XX ± 0.012	SEE NOTES				
.XX ± 0.20	.XXX ± 0.008	FINISH	APPD:		DWG NO.: C-104318022-00	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES				
		QTY	CHKD:			
		SEE NOTES				
					SCALE 1:1	SHEET 2/2
					REV. A0	