
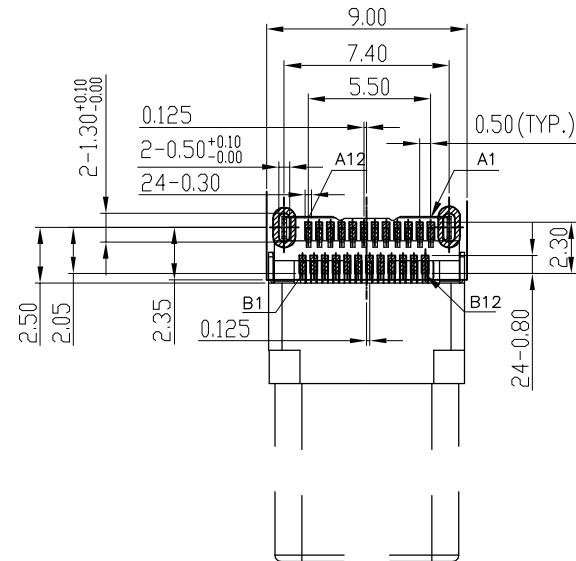


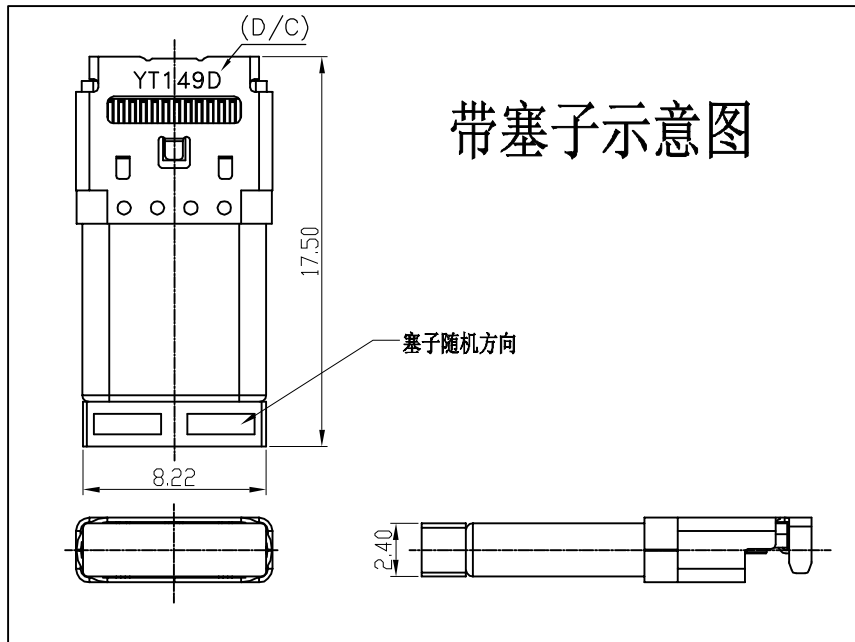

PCB HOLES(TOP VIEW) t=0.8 or 1.0mm
NOTE: GENERAL TOLERANCE: ±0.05mm

DATE CODE:

YT 1 4 9 D

(D= Day,N= Night)

—Date(1=01,...A=10,...H=17,J=18,
...N=22,P=23, ...X=31)

—Month(1=1,...A=10,B=11,C=12)

—YEAR(1=2021; 2=2022)

—YTCONN

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use(SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair—Position 1	B7	Dn2	Positive half of the USB 2.0 differential pair—Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair—Position 1	B6	Dp2	Negative half of the USB 2.0 differential pair—Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuration Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

CUSTOMER DRAWING		XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	ZY.Yi	TITLE: USB TYPE C PLUG 24Pin 沉板1.3双排SMT型L=15.5
	APPROVED	Bull	P/N: XB-TC10-24CB**-01*
	DATE		DRAWING NO. XB-C-TC10-01
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	UNIT	mm	SCALE 1:1
	SIZE	A4	SHEET 2of2
	REV	A1	


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A1		NEW RELEASE	Zhiyong.Yi		2021.07.09



Packing Notes:




1. Reel : 1000pcs/ Reel.
2. Carton : 8000pcs/ 8 Reel/ Carton.

- 1) 用TAPE将纸箱封实.
- 2) 将标签贴于纸箱侧方.





备 注 (REMARK)

- 1). 若有未装满之零数箱, 必须以缓冲材塞满.
- 2). 在搬运过程中要轻拿轻放.
- 3). 在运输中不可堆放过多, 不可有重压现象.
- 4). 上带在黏贴下带时必须平整, 且黏贴处不要出现气泡.

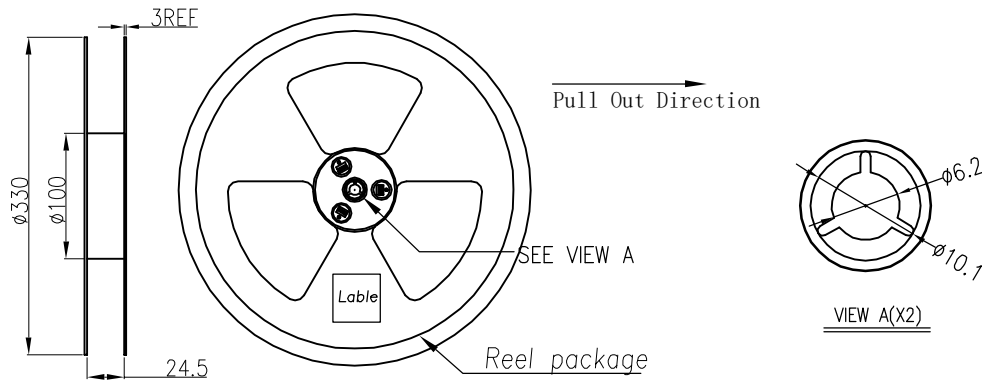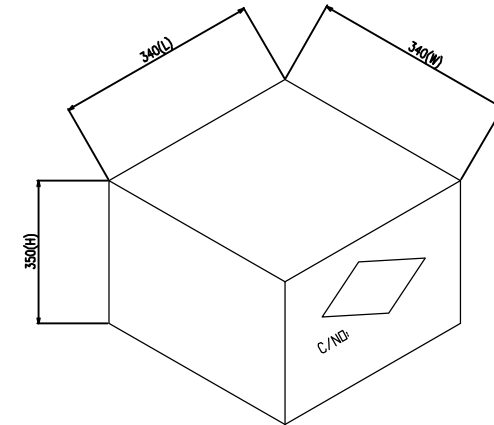

VIEW A(X2)

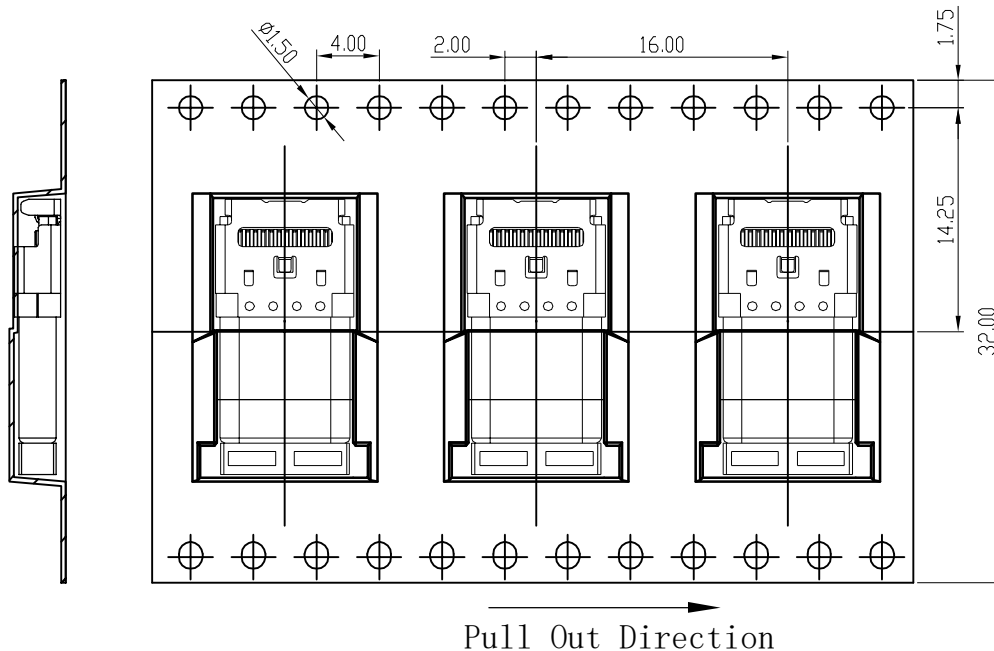

CUSTOMER DRAWING		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
GENERAL TOLERANCE X. ±0.20 .XX ±0.15 .XXX ±0.10 ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	DRAWING	ZY.Yi	TITLE: USB TYPE C PLUG 24Pin 沉板1.3双排SMT型L=15.5		
	APPROVED	Bull	P/N: XB-TC10-24CB**-01*		
	DATE		DRAWING NO. XB-C-TC10-01		
		UNIT	mm	SCALE	1:1
		SIZE	A4	SHEET	1of1
		REV	A1		