

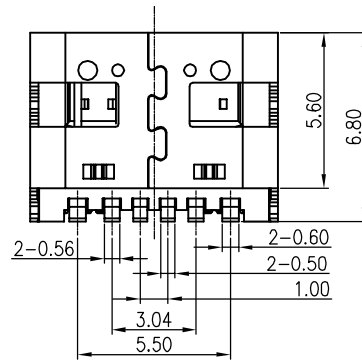
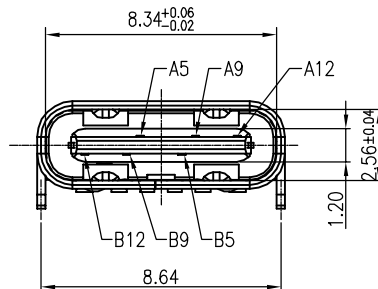

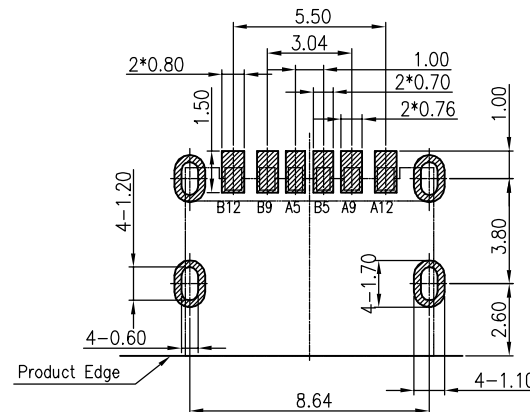


HSF



B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

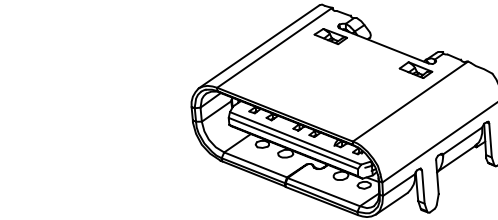

PCB HOLES(TOP VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.05mm

TABLE 1

ITEM	P/N	DIM A
1	UC09-06CB**-01F	0.70mm
2	UC09-06CB**-01G	2.00mm

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
X1		Update drawing.	Bull.pan		2022\03\18

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10000 CYCLES

PRODUCT NO.

UC09 - 06 C B ** - 01*

① ② ③ ④ ⑤ ⑥

① SERIES:

UC09:USB TYPE C REC 6PIN

② POSITION:

06: 6PIN

③ MATERIAL:

C: PA9T

④ COLOR CODE:

B: BLACK

⑤ PLATING CODE:

G1: Au 1u"

⑥ SERIES NO.:

01F:DIM A 0.7mm, No shrapnel

01G:DIM A 2.0mm, No shrapnel

3	SHELL	STAINLESS STEEL t=0.30	Ni:50u" Plated	1 PC
2	CONTACT	COPPER ALLOY t=0.20	Au:1u"/Ni:50u" Plated	1 SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1 PC
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

CUSTOMER
DRAWING东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.GENERAL TOLERANCE
X. ±0.20
.XX ±0.15
.XXX ±0.10ANGEL TOLERANCE
X. ±3°
.XX ±2°
.XXX ±1°DRAWING
Bull. pan

APPROVED

DATE
2022. 03. 18TITLE: USB TYPE C REC 6PIN (L=6.8)90度
板上型母座无弹无LOGO

P/N: XB-UC09-06CBG1-01*

DRAWING NO. XB-C-UC09-01F




UNIT mm SCALE 1:1 SIZE A4 SHEET 1of2 REV X1

HSF

☐ Packing Notes:





1. Reel : 900pcs/ Reel.
2. Carton : 9900pcs/ 11 Reel/ Carton.


- 1) Seal the carton with tape;
- 2) Attach the label to the side of the carton.

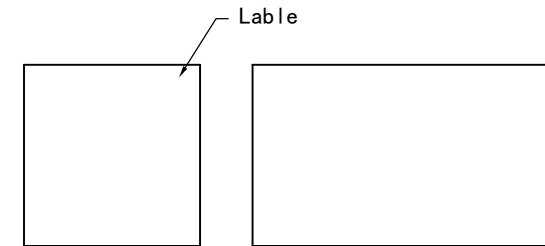

REMARK:

- 1).If there are empty zero boxes, they must be filled with buffer materials.
- 2). Handle with care during handling.
- 3). During transportation, do not stack too much and do not have heavy pressure.
- 4). The upper tape must be flat when sticking the lower tape, and there shall be no bubbles at the sticking place.

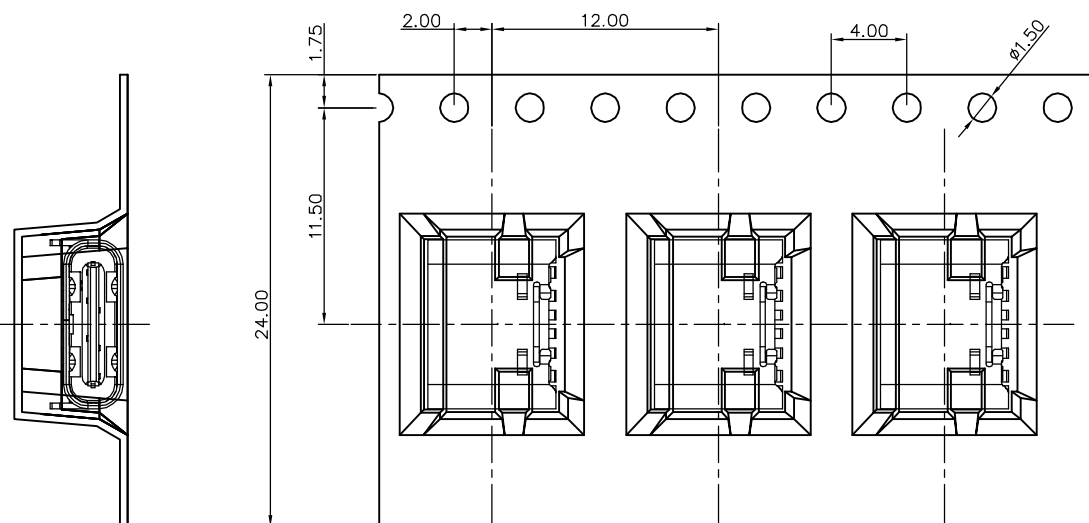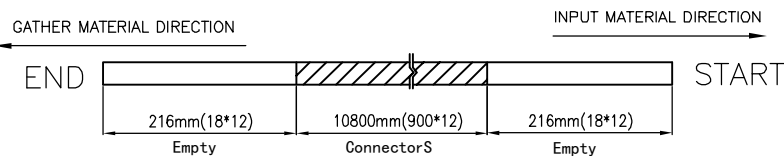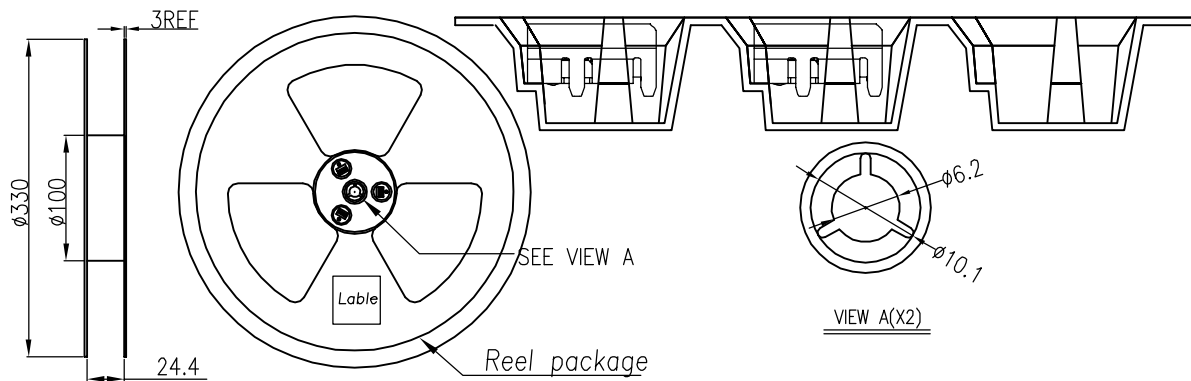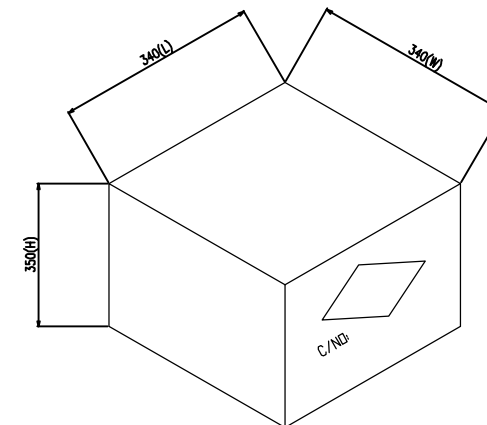

PACKING DRAWING		XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.													
GENERAL TOLERANCE X. ±0.20 .XX ±0.15 .XXX ±0.10		DRAWING		Bull.pan		TITLE: USB TYPE C REC 6PIN (L=6.8)90度 板上型母座无弹无LOGO									
		APPROVED				P/N: XB-UC09-06CBG1-01*									
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°		DATE		2022.03.18		DRAWING NO. XB-C-UC09-01F									
				UNIT mm		SCALE		1:1		SIZE A4		SHEET 2of2		REV	