

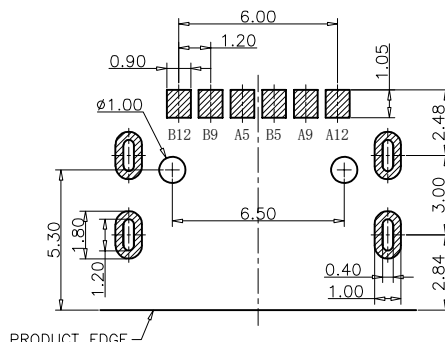
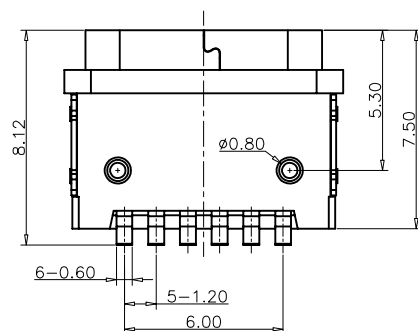


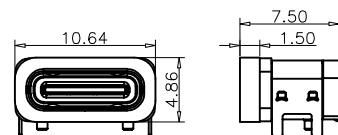


专利产品

30 Min/1.5M
IP-X7



RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05



加防水圈示意图

REV.	ECN	DESCRIPTION	MDF'D	DATE
A0		新订图面	Lee	2022.05.25

备注 (NOTE):

- 电气特性:
 - 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
 - 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
 - 额定电压: 5V.
 - 耐受电压: 100VAC.
 - 绝缘电阻: 至少100兆欧.
- 机械性能:
 - 插入力: 0.5-2.0Kg
 - 拔出力: 0.6-2.04Kg
 - 插拔次数: 10000次.
 - 工作环境: -20℃ to +85℃.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

品名 (ITEM NO)	TYPE C 6P 板上防水母座L=7.5mm (B款 外露1.5) 外壳4脚插板
料号 (PART NO)	XB-ATCF-06-025
图号 (DWG NO)	XB-TCF-045

页码 (SHEET)	1/1	单位 (UNIT): MM
版本 (REV)	A0	比例 (SCALE) 1:1
日期 (DATE)	2022.05.25	未注公差 TOLERANCE UNSPECIFIED
设计 (DESIGN)	Lee	X.X ±0.20
审核 (CHECKED)	LSW	X.XX ±0.15
核准 (APPROVED)	CJL	X.XXX ±0.10
		X° ±5°
		X.X° ±2°

These drawings and specifications are the property of Dongguan Xibang Electronics Co., Ltd. and should not be copied. Without the prior written consent of Dongguan Xibang Electronics Co., Ltd., it shall not be copied or used in any way

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL, NI PLATED
2	CONTACT	6	COPPER STEEL, TIN/AU/NI PLATED
3	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
4	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0