

F

E

D

C

B

A







RoHS
Compliant

SYMBOL

REVISION

APPROVAL

DATE

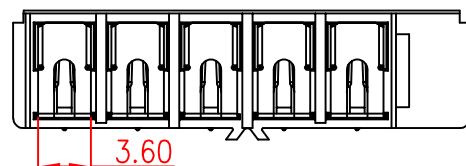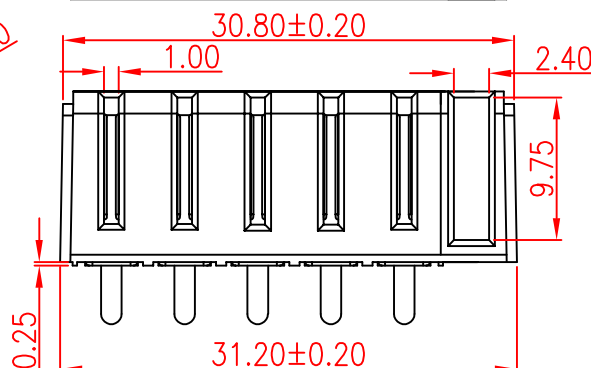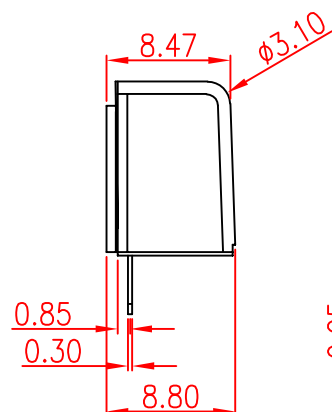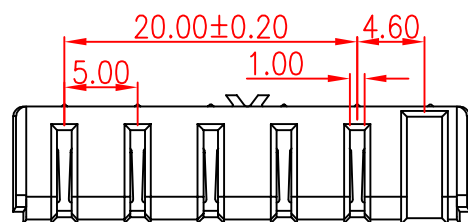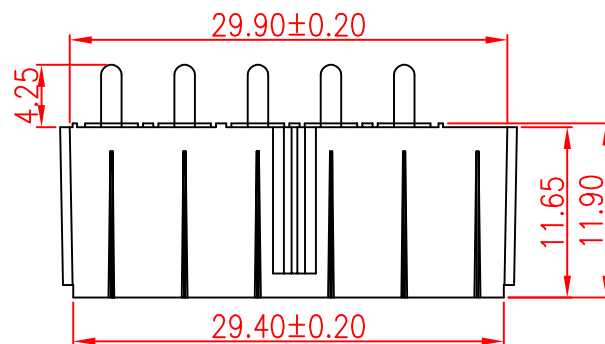

备注:

1. 产品规格:

1-1. 额定电压:30V

1-2. 耐电压:1000V AC MIN.

1-3. 接触阻抗:30mΩ MAX. INITIAL;40mΩ MAX
AFTER 3000 CYCLES

1-4. 绝缘电阻:1000MΩ MIN


1-5. 工作温度:-25°C TO +80°C

2. 材质:

2.1胶芯: PA9T UL94V-0/LCP BLACK

2.2端子: 合金铜, 镍底, GOLD

3. 所用材质须符合RoHS要求

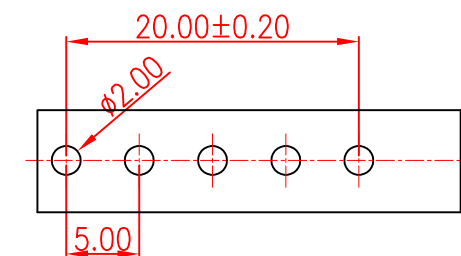

RECOMMENDED P.C.BOARD LAYOUT

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

M.M.Zhang

DWG.No.

JD-009

PART NO.

XB-Z01F-DIP 系列

CHECK

G.C.Chen

REV.

A1

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°ANGLE
0°±3°

APPROVAL

SCALE

2:1

DATE

PAGE

01-07-2016

1 OF 1

F

E

D

C

B

A