
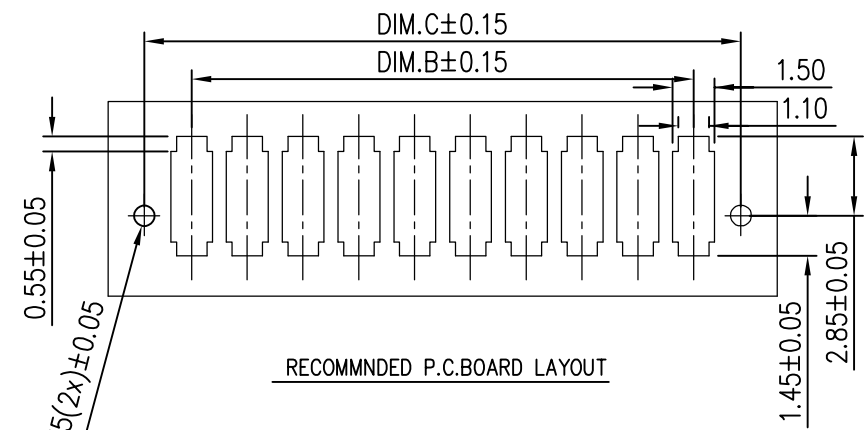
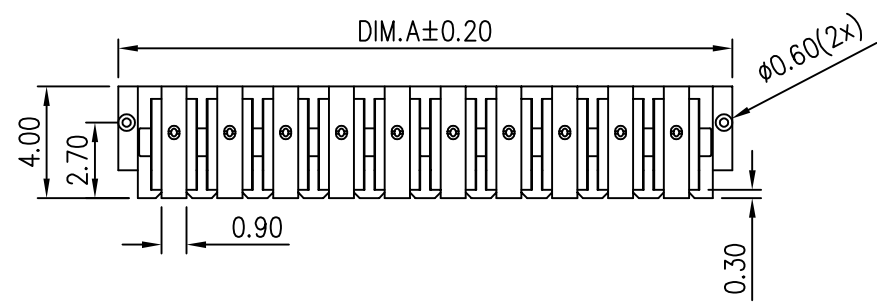
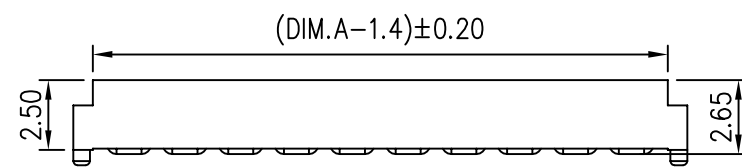
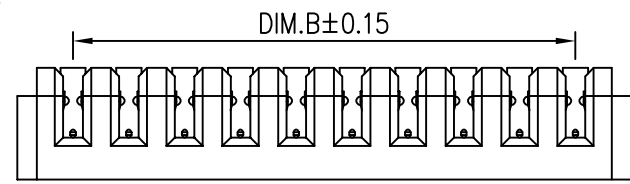

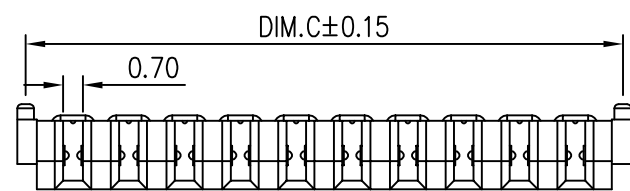



RoHS
Compliant

- 备注:
1. 产品规格:
- 1-1. 额定电流: 2A
 - 1-2. 额定电压: 12V
 - 1-3. 耐压: 1000V AC MIN.
 - 1-4. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 3000 CYCLES
 - 1-4. 绝缘电阻: 1000MΩ MIN
 - 1-5. 工作温度: -25°C TO +80°C
2. 材质:
- 2.1 胶芯: PA9T UL94V-0/LCP BLACK
 - 2.2 端子: C2680R-H, 镍底, GOLD
3. 所用材质须符合RoHS要求

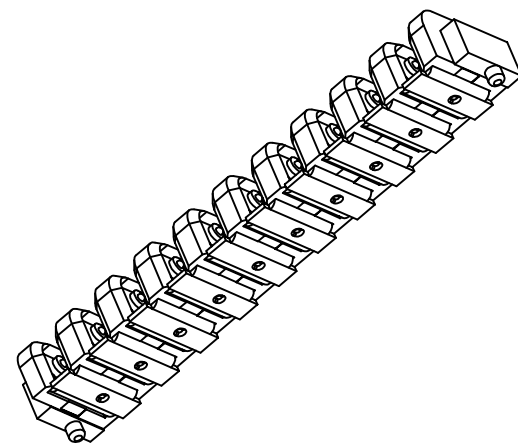

PART NUMBER	PIN	Dim.A	Dim.B	Dim.C
XB-A00F-2P-S1	02pin	6.00	2.00	5.40
XB-A00F-3P-S1	03pin	8.00	4.00	7.40
XB-A00F-4P-S1	04pin	10.00	6.00	9.40
XB-A00F-5P-S1	05pin	12.00	8.00	11.40
XB-A00F-6P-S1	06pin	14.00	10.00	13.40
XB-A00F-7P-S1	07pin	16.00	12.00	15.40
XB-A00F-8P-S1	08pin	18.00	14.00	17.40
XB-A00F-9P-S1	09pin	20.00	16.00	19.40
XB-A00F-10P-S1	10pin	22.00	18.00	21.40

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN	X.Z.Huang	SCALE	
DRAWING	X.Z.Huang	UNIT	mm
CHECK	X.X.Zheng	SIZE	A4: 210: 297
APPROVAL	M.Y.Li	VER.	01

TOLERANCE	PART NAME.	CONNECTOR
UP TO 5 ±0.2	PART NO.	母座 XB-A00F-2/3/4/5/6/7/8/9/10-S1
ABOVE 5~30 ±0.3	DWG. NO.	XB-RD-SP-0020
ABOVE 30 ±0.5	DATE.	2019-01-17
ANGLE ±3°		