

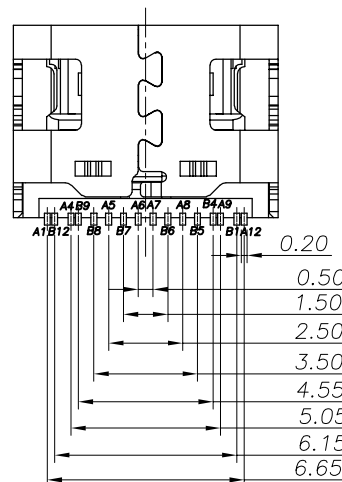
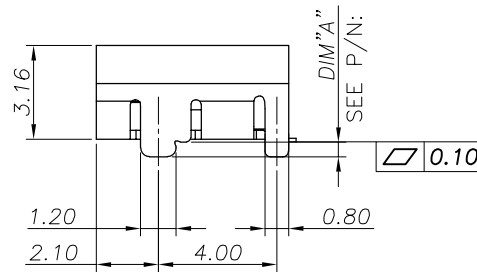
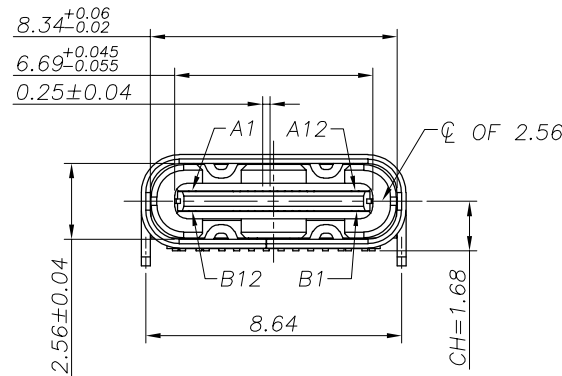
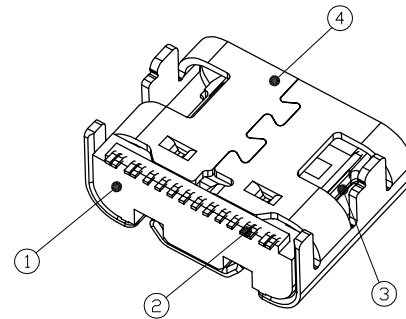


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
B	ECN NO.	UPDATE THE DRAWING	2019.05.25	Yuxiaobin
C	ECN NO.	UPDATE THE DRAWING	2020.04.30	SYJ

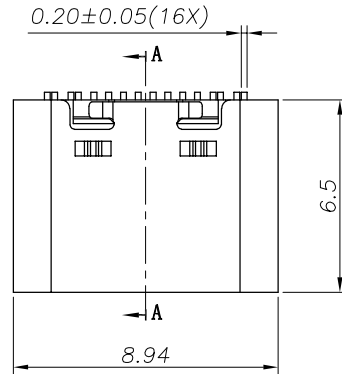

SECTION:A-A

NOTE:

1.MATERIAL SPECIFICATION:

- 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
- 2.TERMINAL: COPPER ALLOY(C1814)
- 3.MID PLATE: STAINLESS STEEL(SUS301)
- 4.FRONT SHELL: STAINLESS STEEL(SUS304)

2.PLATING SPECIFICATION:

2-1.TERMINAL:

- Ni 50u" MIN. UNDER PLATED OVER ALL.
- Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
- (GOLD PLATING THICKNESS FOLLOW THE P/N)
- PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N

2-2.FRONT SHELL:

- PLATING SPECIFICATIONS FOLLOW THE P/N

2-3.MID PLATE:

- CLEAR ONLY

3.MECHANICAL PERFORMANCE,

- 3-1.INSERTION FORCE: 0.5~2.0kgf.
- 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
- 3-3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE,

- 4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
- 4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
- 4-3.INSULATION RESISTANCE: 100MΩ MIN
- 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.


5. ENVIRONMENTAL PERFORMANCE:

- OPERATING TEMPERATURE: -25°C~+85°C.

6.IR REFLOW:


- THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

TOLERANCE	NAME(INTENDED USE) CUSTOMER DRAWING	XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X.X ±0.30	X.* ±10°	PART NO.	TITLE: USB CF 16PIN (L=6.5) TOP MOUNT	
.XX ±0.20	.X.* ± 8°	SEE P/N:		
.XXX ±0.10	.XX.* ± 5°	DESIGN: SYJ	DRAWG NO. XB-ACF002-6R	
UNITS	mm	CHED:		
MATERILA		APPD:		
FINISH				



SCALE	SHEET	REV.
1:1	1/3	C

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
B	ECN NO.	UPDATE THE DRAWING	2019.05.25	Yuxiaobin
C	ECN NO.	UPDATE THE DRAWING	2020.04.30	SYJ

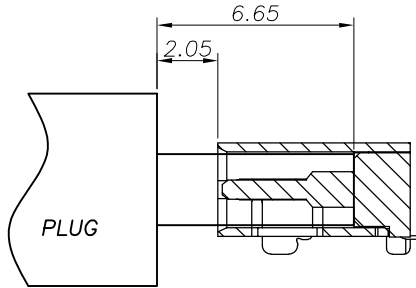

AFTER MATING

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

ORDER INFORMATION

P/N: ACF002-6XXHXXXX-XHR

HOUSING MATERIAL

A: LCP
E: PA9T

HOUSING COLOR

1: BLACK
2: WHITE
4: ORANGE
5: NATURE

SHELL MATERIAL

H: SUS304

SHELL PLATING

1: Ni
4: SELECTIVE-Au 1u"

0: DIM"A"=0.5±0.20MM
1: DIM"A"=0.8±0.20MM

CONTACT FUNCTIONAL AREA PLATED


03: Au 3u"
15: Au 15u"
30: Au 30u"

CONTACT SOLDER AREA PLATED

1: Au 1u"

CONTACT MATERIAL

A: C1814

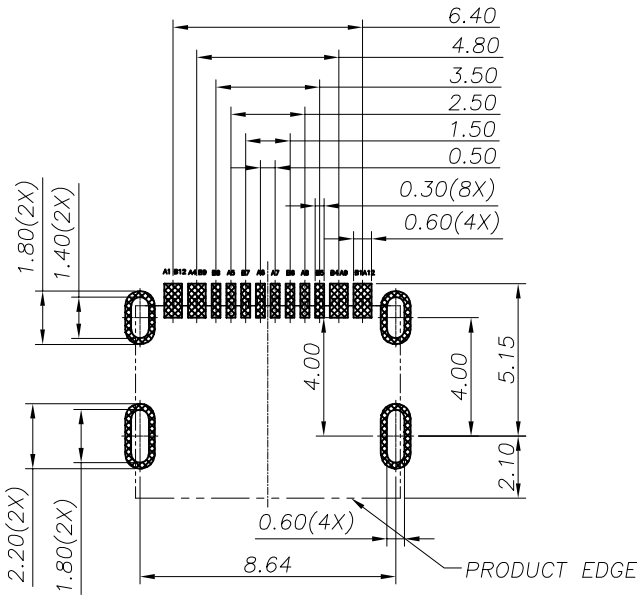


RECOMMENDED PCB LAYOUT(TOP VIEW)




THICKNESS 0.60MM;DEFAULT TOLERANCE:±0.05

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	XHB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X.X ±0.30	X.* ±10°	PART NO.	TITLE: USB CF 16PIN (L=6.5) TOP MOUNT		
.XX ±0.20	.X* ± 8°	SEE P/N:	DRAWG NO. XB-ACF002-6R		
.XXX ±0.10	.XX* ± 5°				
UNITS	mm	DESIGN: SYJ	 SCALE SHEET REV. 1:1 2/3 C		
MATERILA		CHED:			
FINISH		APPD:			

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
B	ECN NO.	UPDATE THE DRAWING	2019.05.25	Yuxiaobin
C	ECN NO.	UPDATE THE DRAWING	2020.04.30	SYJ

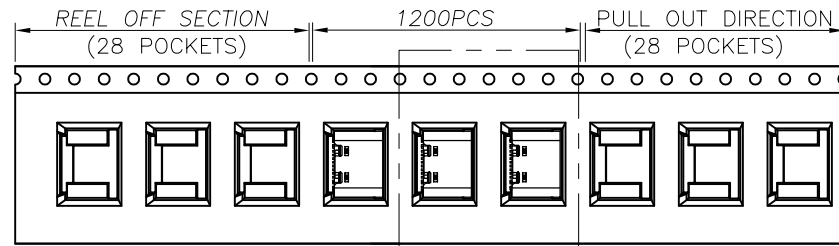

SEE DETAIL X

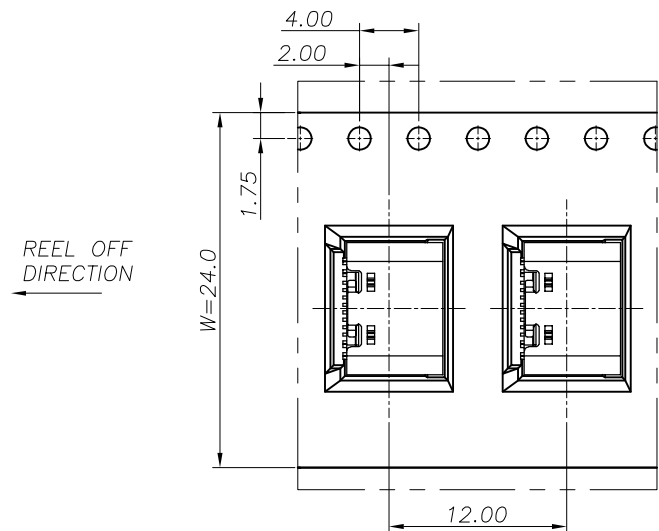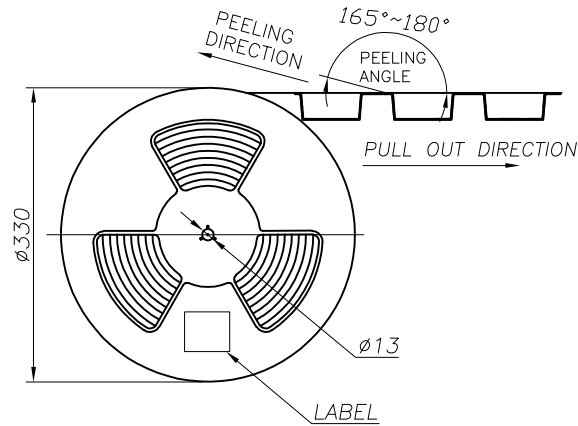

PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

FOLDER
PAPER BOARD

CARTON

		REEL	CARTON		
CONNECTOR (PCS)		1200	12000		
NAME(INTENDED USE) CUSTOMER DRAWING		XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
PART NO. SEE P/N:		TITLE: USB CF 16PIN (L=6.5) TOP MOUNT			
DESIGN: SYJ		DRAWG NO. XB-ACF002-6R			
CHED:					
APPD:			SCALE 1:1	SHEET 3/3	REV. C