

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
04	ECN NO.	UPDATE THE DRAWING	2020.06.19	SYJ
05	ECN NO.	UPDATE THE DRAWING	2020.09.29	SYJ

NOTE:

1.MATERIAL SPECIFICATION:

- 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0
- 2.TERMINAL: COPPER ALLOY(C1814)
- 3.MID PLATE: STAINLESS STEEL(SUS301)
- 4.FRONT SHELL: STAINLESS STEEL(SUS304)
- 5.EMI PLATE: STAINLESS STEEL(SUS304)

2.PLATING SPECIFICATION:

2-1.TERMINAL:

Ni 50u" MIN. UNDER PLATED OVER ALL.

Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.

(GOLD PLATING THICKNESS FOLLOW THE P/N)

PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N

2-2.FRONT SHELL:

PLATING SPECIFICATIONS FOLLOW THE P/N

2-3.MID PLATE&EMI PLATE:

CLEAR ONLY

3.MECHANICAL PERFORMANCE,

3-1.INSERTION FORCE: 0.5~2.0kgf.

3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.

3-3.DURABILITY: 10000 CYCLES.

4.ELECTRICAL PERFORMANCE,

4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)

CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;

1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.

4-2. LLCR:

VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.

SHIELD: 50mΩ/MAX.

LLCR MAX. CHANGE OF ALL PINS: 10mΩ.

4-3.INSULATION RESISTANCE: 100MΩ MIN

4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.


5. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25°C~+85°C.




6.IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X.X	±0.30	X.* ±10°	PART NO.	TITLE: USB CF VERTICAL(L=9.2)	
.XX	±0.20	.X.* ± 8°	DESIGN: SYJ	DRAWG NO. XB-ACF014-3R	
.XXX	±0.10	.XX.* ± 5°			
UNITS	mm		CHED:	 SCALE SHEET REV. 1:1 1/3 05	
MATERILA			APPD:		
FINISH					

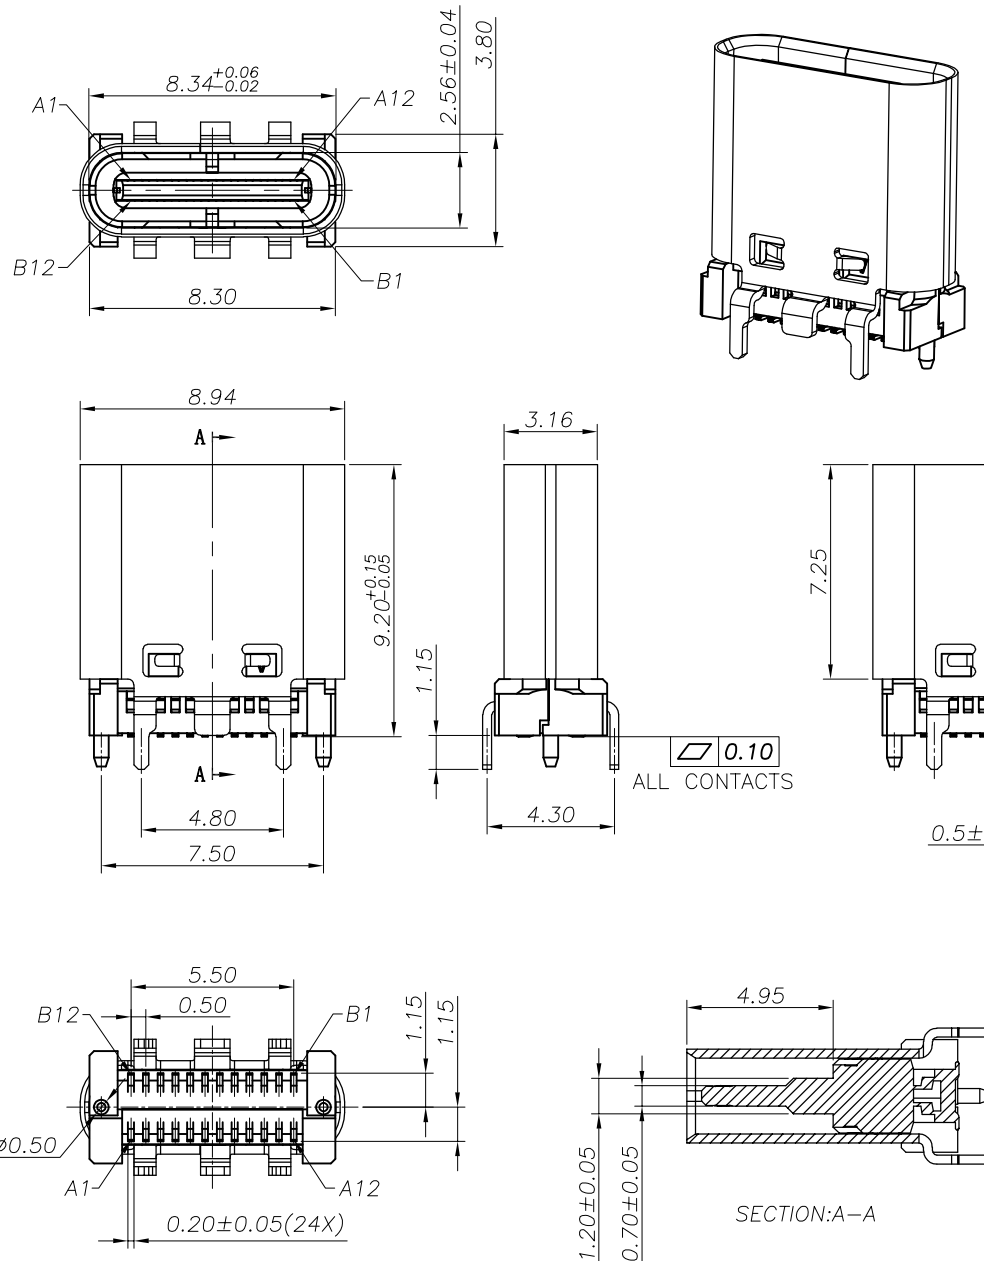

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
04	ECN NO.	UPDATE THE DRAWING	2020.06.19	SYJ
05	ECN NO.	UPDATE THE DRAWING	2020.09.29	SYJ

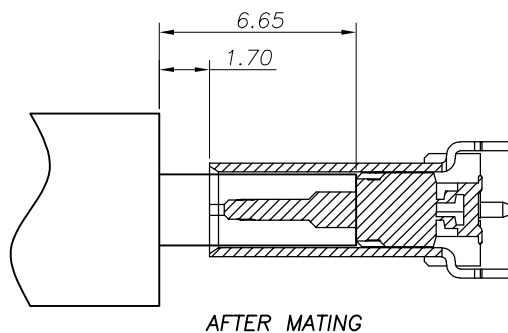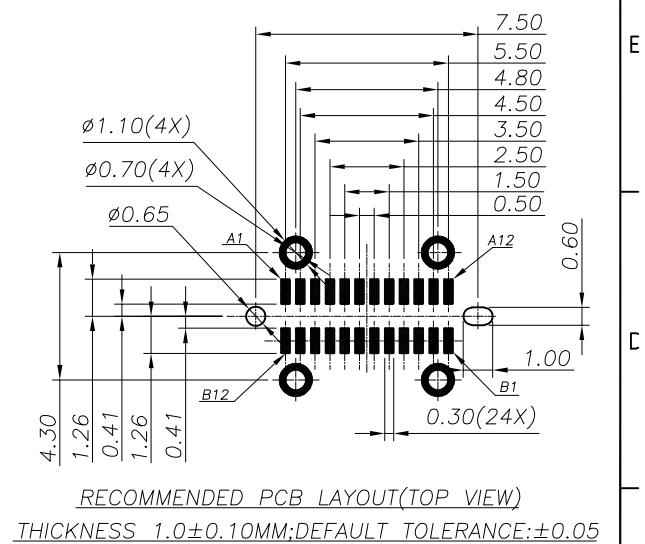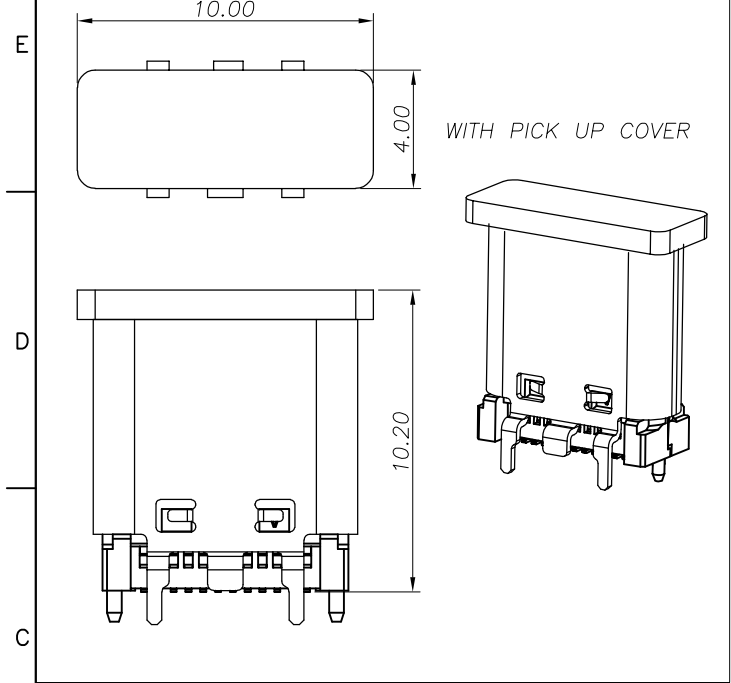






P/N: ACF014-3X1H1A103-0HR	
HOUSING MATERIAL	
A: LCP	
E: PA9T	
HOUSING COLOR	
1: BLACK	
2: WHITE	
5: NATURE	
SHELL MATERIAL	
H:SUS304	
SHELL PLATING	
1: Ni	
2: MATT-Sn	
3: BRIGHT-Sn	
4: SELECTIVE-Au 1u"	
CONTACT FUNCTIONAL AREA PLATED	
01: Au 1u"	
03: Au 3u"	
15: Au 15u"	
30: Au 30u"	
CONTACT SOLDER AREA PLATED	
0: Sn	
1: Au 1u"	
CONTACT MATERIAL	
A: C1814	
K: C7025	

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

TOLERANCE	NAME(INTENDED USE) CUSTOMER DRAWING	XBB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.		
X.X ±0.30	X.* ±10°	PART NO.	TITLE: USB CF VERTICAL(L=9.2)	
.XX ±0.20	.X* ± 8°	DESIGN: SYJ	DRAWG NO. XB-ACF014-3R	
.XXX ±0.10	.XX* ± 5°	CHED:	SCALE SHEET REV.	
UNITS mm	APPD:	1:1 2/3 05		
MATERILA				
FINISH				

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
04	ECN NO.	UPDATE THE DRAWING	2020.06.19	SYJ
05	ECN NO.	UPDATE THE DRAWING	2020.09.29	SYJ

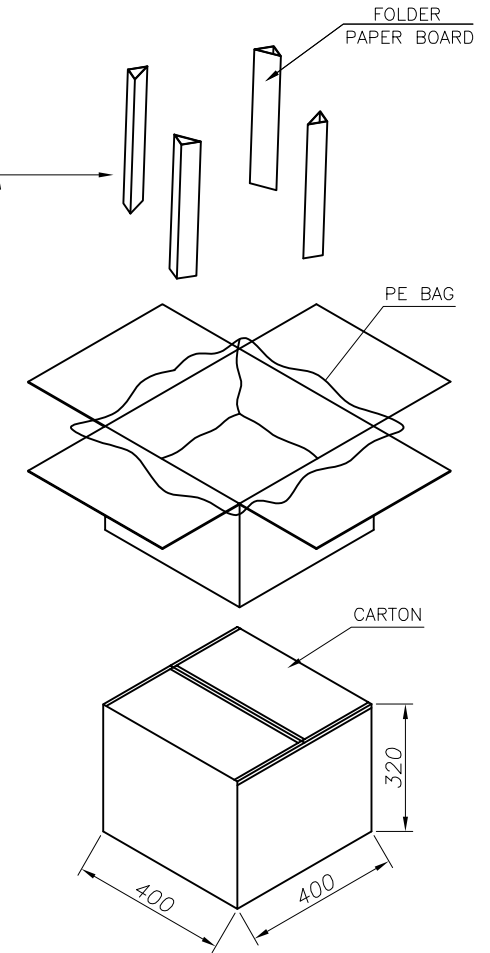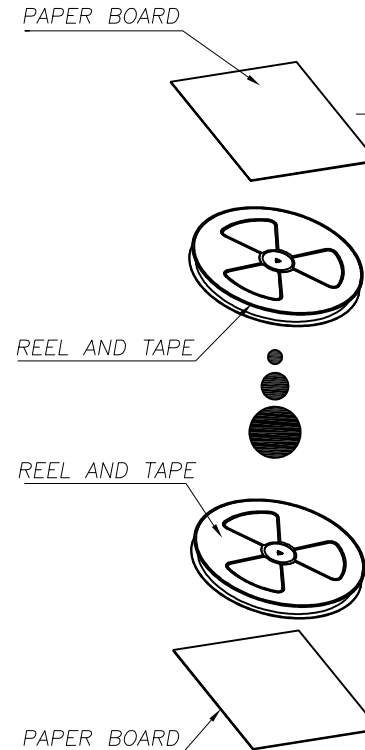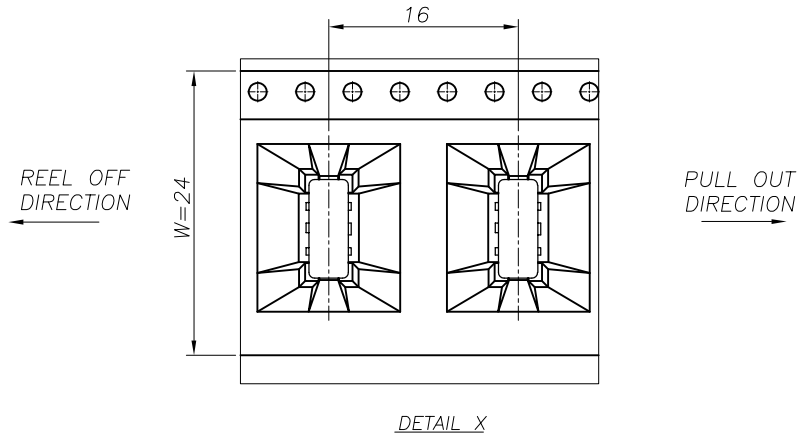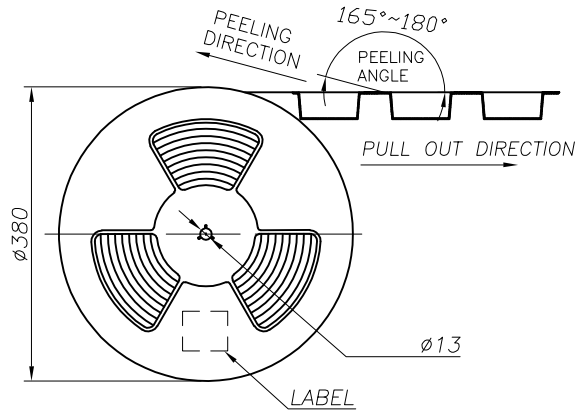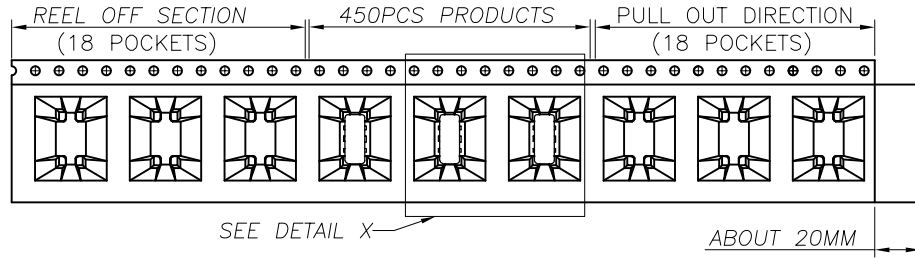

	REEL/TRAY	CARTON
CONNECTOR (PCS)	450	4500

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				
X.X	±0.30	X.*	±10°	PART NO.		TITLE: USB CF VERTICAL (L=9.2)		
.XX	±0.20	.X*	± 8°					
.XXX	±0.10	.XX*	± 5°					
UNITS		mm		DESIGN: SYJ		DRAWG NO. XB-ACF014-3R		
MATERILA				CHED:		 SCALE SHEET REV. 1:1 3/3 05		
FINISH				APPD:				