

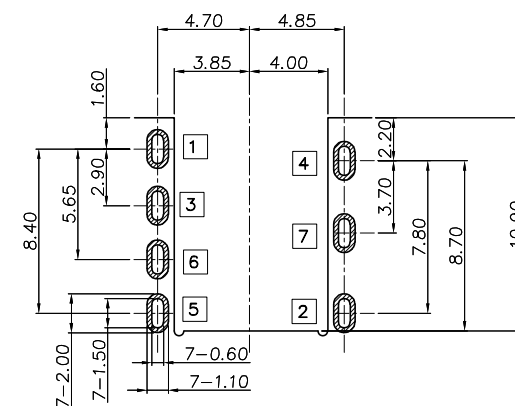
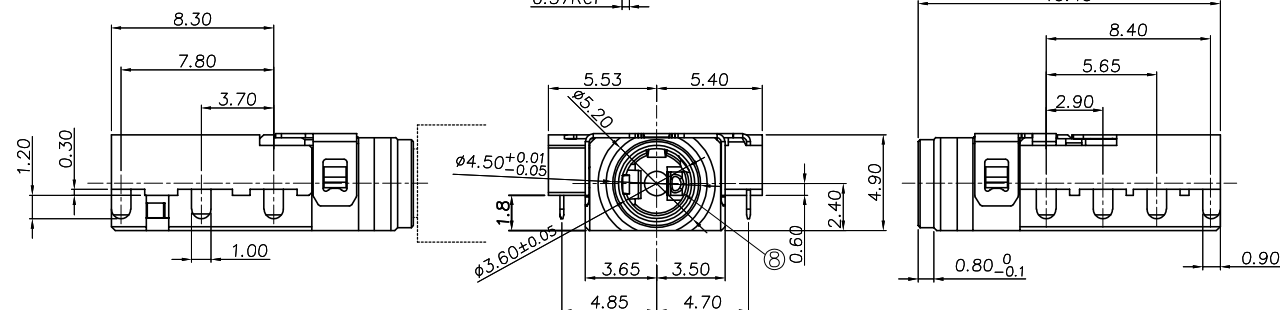
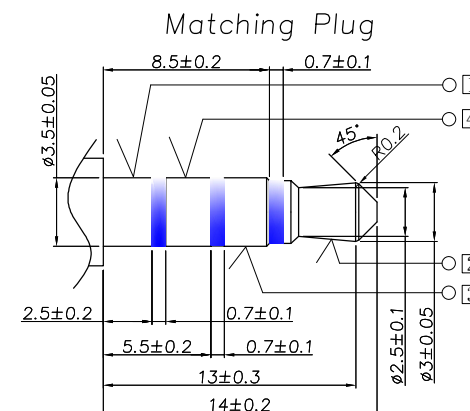


RH=RoHS 2.0 + Halogen Free



TOP VIEW (TOLRANCE: ± 0.05)

Unmating force: 3~30N.



9	Housing	1	HIGH TEMPERATURE PLASTIC	Black
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Black
6	Shunt terminal [6]	1	Phosphor bronze, 0.20t	Gold Flash On Contact And Solder Tail Area, 50u" Nickel UnderPlated
5	Transfer Spring [5]	1	Phosphor bronze, 0.20t	
7	Shell	1	Phosphor bronze, 0.20t	
4	Ring spring [4]	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area
3	Ring spring [3]	1	Phosphor bronze, 0.20t	100u" Matte-Tin Plating on Solder Tail Area, 50u" Nickel UnderPlated
2	Tip spring [2]	1	Phosphor bronze, 0.20t	
1	Earth spring [1]	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	李海鸥	2015. 07. 02		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
						. x	±0. 30	CHECK					TITLE:	Ø3. 5mm PHONE JACK
—————	A-1	2015. 07. 02	客户要求, 变更头部结构.	李海鸥	余 军	. xx	±0. 25	APPROVAL					MODEL NO.	XB-PJ-D3145C-ABK7AS02L-RH
—————	A-0	2015. 05. 07	NEW	李海鸥	余 军	. xxx	±0. 10						FILE NO.	Q/SSY. QW-001A-xxxx
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4		SHEET: 1 of 1		