

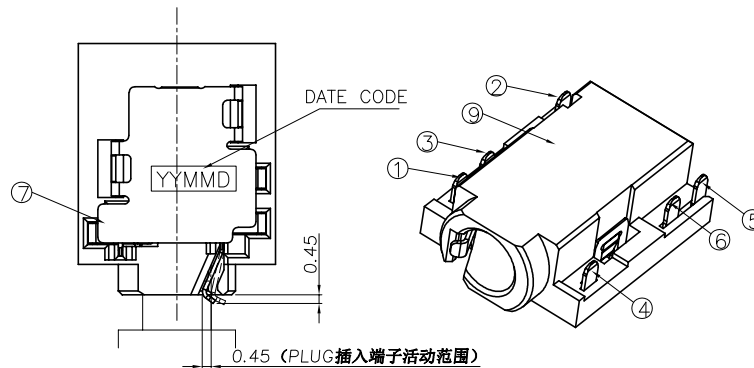
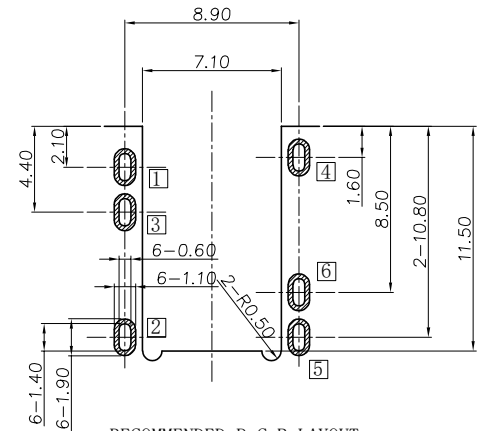
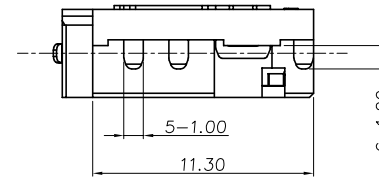
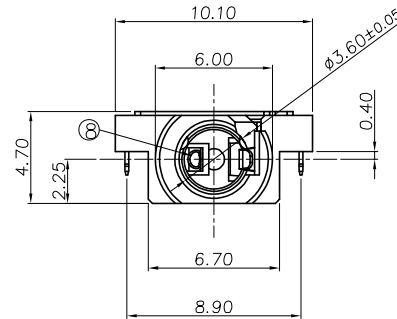


MODEL NO.:
XB-PJ-D3228A-ABK7AU02L-RH

- (1) (2)(3) (4)(5)(6)
- (1) Series No.
(2) Schematic type: A,B,C
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Plating Au 1u" min.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen free

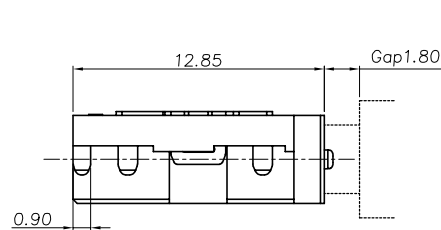

Product application:
The spring working position
when Plug-In.

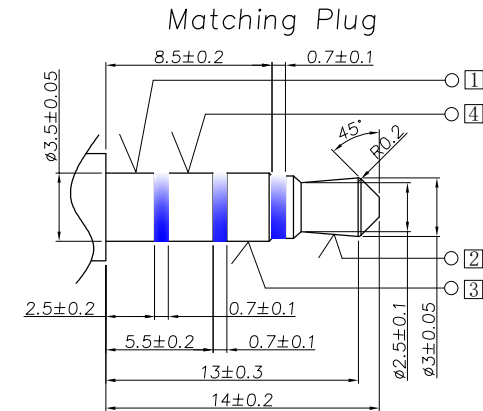

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

SPECIFICATION:

1.Electrical characteristics

- 1-1.Current rating:DC 0.5A max.
1-2.Voltage rating:DC 30V.
1-3.Contact resistance:50mΩ max.
1-4.Insulation resistance:100MΩ min. at 500V



DC.

- 1-5.Withstanding voltage:500V AC for 1 minute.

2.Mechanical characteristics

- 2-1.Life test:5000 cycles min,
2-2.Mating force:3~30N,
Unmating force:2~30N.

3.Salt spray test time:48 hours min.

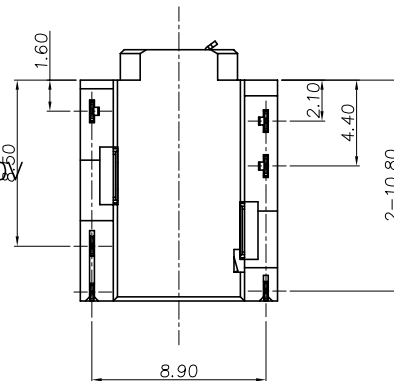

9	Housing	1	PA10T R630NH+30%GF UL 94V-0	Black
8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	Black
5	Transfer Spring	1	Phosphor bronze, 0.20t	
7	shell	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area And Solder
6	Shunt terminal	1	Phosphor bronze, 0.20t	Tail Area, All over Nickel Plated
4	Ring spring	1	Phosphor bronze, 0.20t	
3	Ring spring	1	Phosphor bronze, 0.20t	
2	Tip spring	1	Phosphor bronze, 0.20t	
1	Earth spring	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	李海鸥	2015.08.13
						.x	±0.30	CHECK		
						.xx	±0.25			
	A-0	2015.08.13	NEW	李海鸥	余军	.xxx	±0.10	APPROVAL		
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE: Ø3.5mm PHONE JACK
MODEL NO. XB-PJ-D3228A-ABK7AU02L-RH
FILE NO. Q/SSY.QW-001A-0542