
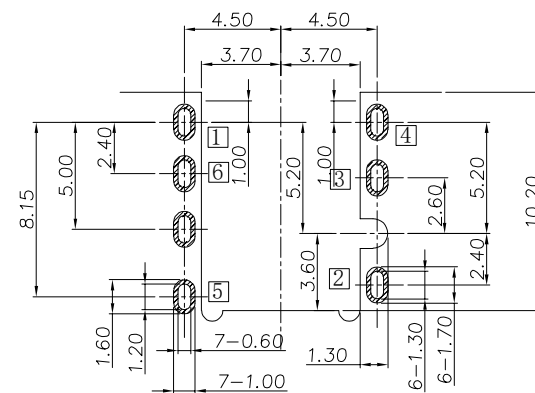
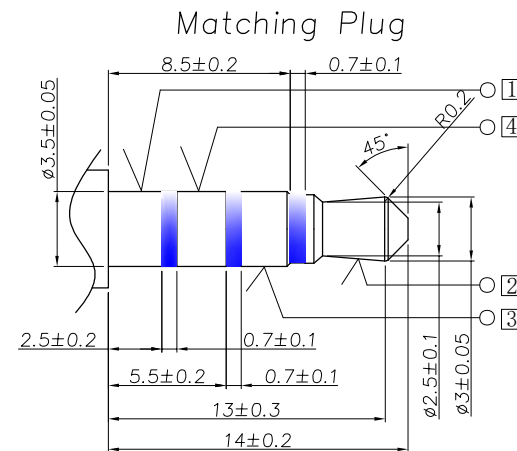
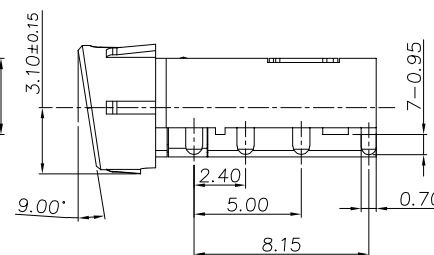
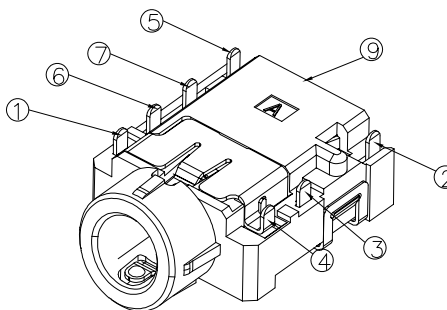
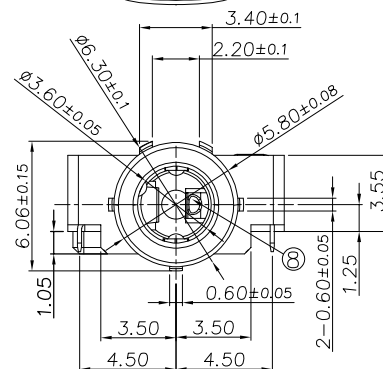
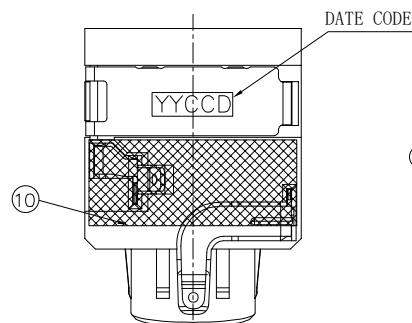



(1) (2) (3) (4) (5) (6)

- (1) Series no.
- (2) Schematic type: A,B,C
- (3) Housing color:
BK7=Black
- (4) Terminal plating:
AS04=Plating Tin/Gold 5u" min.
- (5) Packing mode:L=Reel packing
- (6) Environmental requirements:
Rh=RoHS 2.0 + Halogen Free

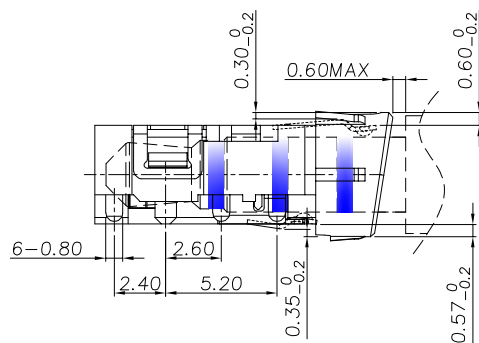

RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE: ± 0.05)

3. Salt spray test time: 48 hours min.

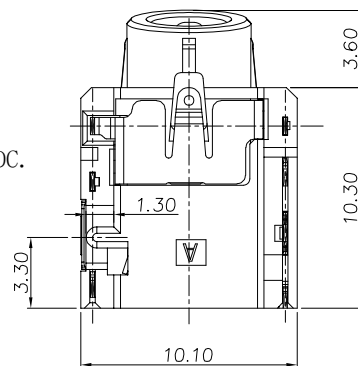

10	Mylar	1	Kapton	Yellow
9	Housing	1	PA10T R630NH+30%GF UL 94V-0	Black
8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	Black
5	Transfer Spring [5]	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All over Nickel Plated
7	shell	1	Phosphor bronze, 0.20t	Nickel Plated.
6	Shunt terminal [6]	1	Phosphor bronze, 0.20t	Au5u ⁺ On Contact Area
4	Ring spring [4]	1	Phosphor bronze, 0.20t	Tin Plating on Solder
3	Ring spring [3]	1	Phosphor bronze, 0.20t	Tail Area
2	Tip spring [2]	1	Phosphor bronze, 0.20t	, All over Nickel Plated
1	Earth spring [1]	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	李海鸥	2016. 11. 16		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
						10<L≤20	±0.30	CHECK					TITLE:	Ø3.5mm PHONE JACK
—————	A-1	2016. 11. 16	客户要求, 变更头部形状, 外壳改镀全镍;	李海鸥		5<L≤10	±0.25	APPROVAL					MODEL NO.	XB-PJ-D3261D-ABK7AS04L-RH
—————	A-0	2016. 09. 19	NEW	李海鸥		L≤5	±0.20						FILE NO.	Q/SSY. QW-001A-0574
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4 	SHEET:1 of 1			