
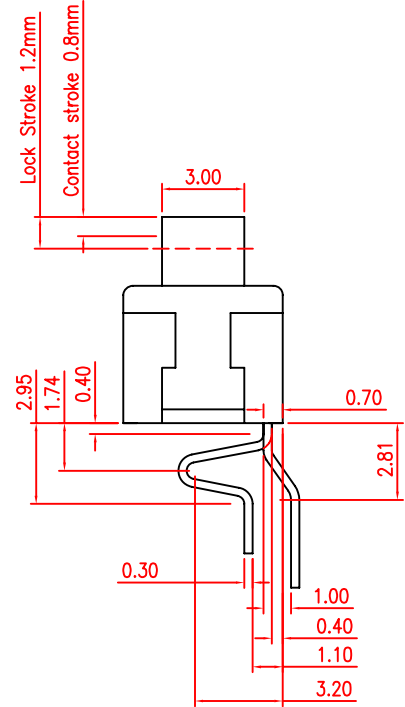
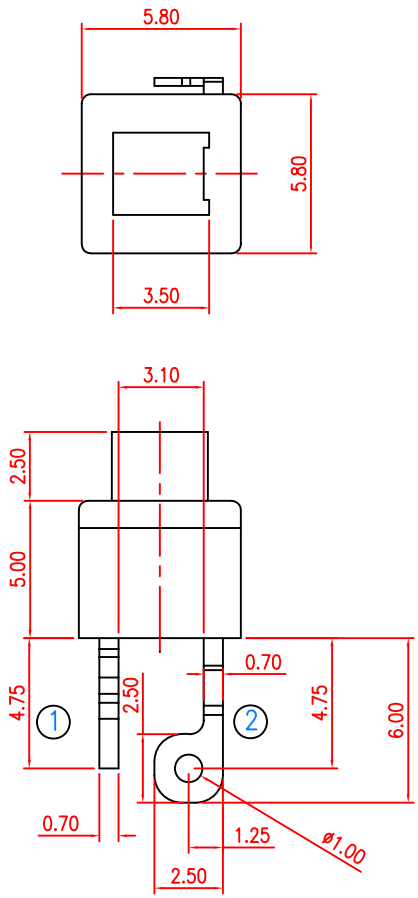


RoHS Compliant


FOR REFERENCE ONLY

SYMB	REVISION	DATE	APVD.

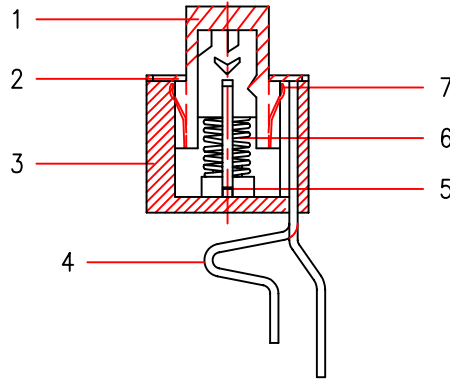

SPECIFICATION:

- 1.Rating: 2A 2V DC
- 2.Contact resistance:50mΩ max
- 3.Insulation resistance:100MΩ min
- 4.Withstand Voltage:500 AC for 1 minute
- 5.Operating force:160gf
- 6.Life:10000 cycles.



TITLE	PUSH SWITCH	DRAWN	J.Pang	TOLERANCE OTHERWISE UNLESS SPECIFIED	8				
PART NO.	XB-PS-11E26L	CHECKED	G.C.chen	UP TO 5	±0.2	7	CONTACT PLATE	PBS	2 Ag CLAD
DRAW NO.	P260	APPROVED	H.K.Lai	ABOVE 5 ~ 30	±0.3	6	SPRING	STAINLESS STEEL	1 NATURAL
SCALE	7:2	UNIT	mm	DATE	26-09-2011	5	HOOK	STAINLESS STEEL	1 Ni PLATED
						4	TERMINAL	BRASS STRIP	2 Ag PLATED
						3	BOTTOM	PA66	1 BLACK
						2	COVER	POM	1 GRAY
						1	KNOB	POM	1 WHITE
						NO.	PARTS	MATERIAL	QTY. FINISHING
Copyright Reserved,Please Do Not Copy.					版权所有,不得翻印.				

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.