

NOTES:

1.PRODUCT SPECIFICATIONS:

1.1. CURRENT RATING: 1.5A/PIN MAX(A4,A9,B4,B9)
1.25A/PIN MAX(A1,A12,B1,B12),0.25A(DHER PIN)

1.2. TEMPERATURE RANGE: -40 °C ~ 85 °C

1.3. CONTACT RESISTANCE: 30 MILLIONHM MAX

1.4. INSULATION RESISTANCE: 100 MEGOHMS MIN.

1.5. DIELECTRIC WITHSTANDING VOLTAGE:100 VAC

1.6. PULG INSERTION DIRECTION WITHSTANDS
INSERTION FORCE >13.6Kg

1.7. INSERTION FORCE : 5N~20N

1.8. UNMATING FORCE:INITIAL:8N~20N;DURABILITY:6N~20N

1.9. DURABILITY: 10,000 CYCLES

(1.6/1.7/1.8/1.9 Need to cooperate with the whole machine test)




2. PART NUMBER CODE:

C F 106 - 24 L X XX R - 01



① ②


① HOUSING:
B:BLACK

② CONTACTS PLATED:
12:接触镀金3u"焊接区域镀金1u"

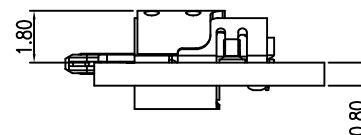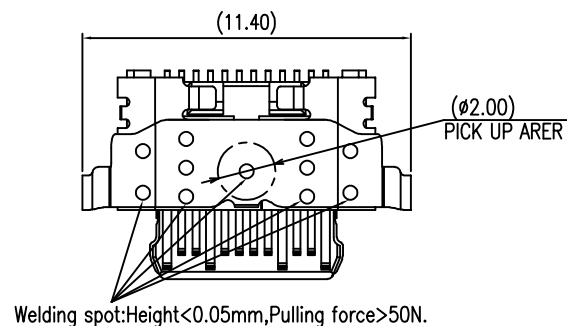

MOUTING CONDITION (REF.)

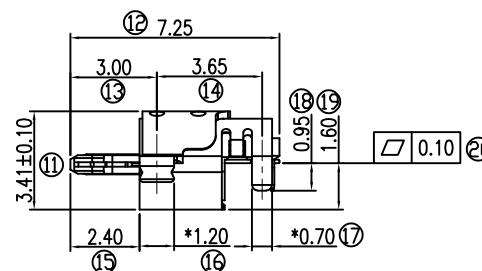
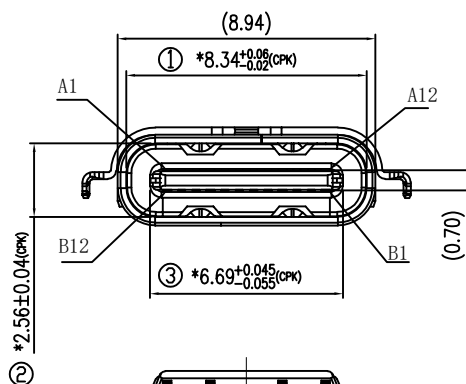


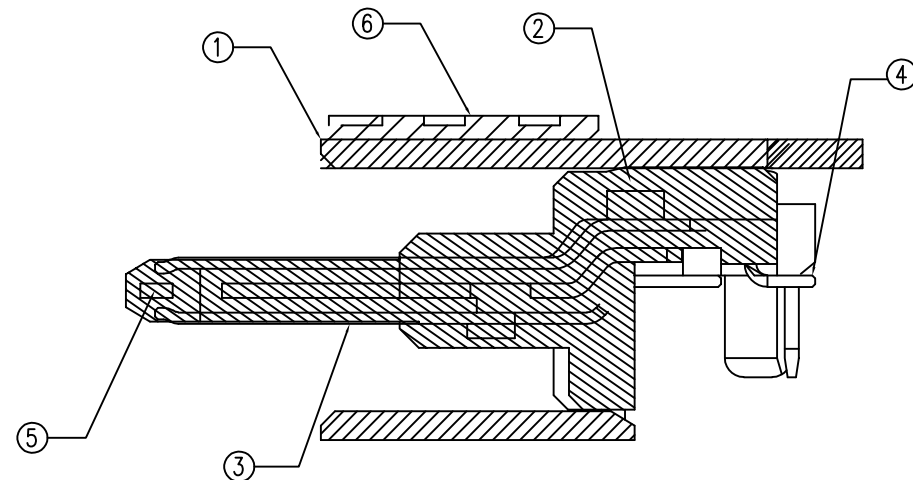

RECOMMENDED P.C.B. LAYOUT (THICKNESS:0.80MM)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

6	SHELL-2	1PCS	STAINLESS STEEL	50u" MIN. Ni UNDERPLATING OVERALL
5	MID PLATE	1PCS	STAINLESS STEEL	50u" MIN. Ni UNDERPLATING OVERALL
4	CONTACT B	1SET	COPPER ALLOY	Au 15u" PLATING ON CONTACT AREA Au 1~3u" PLATING ON SOLDER AREA 50u" MIN. NICKEL UNDER PLATING ALL OVER
3	CONTACT A	1SET	COPPER ALLOY	
2	HOUSING	1PCS	NYLON	COLOR:BLACK
1	SHELL-1	1PCS	STAINLESS STEEL	50u" MIN. Ni UNDERPLATING OVERALL
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH

PART NO.:		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		DRAWN BY		DATE	
SEE THE PART NUMBER CODE				SAM		2018.09.28	
QUALITY SYMBOL 0 ▽=0							

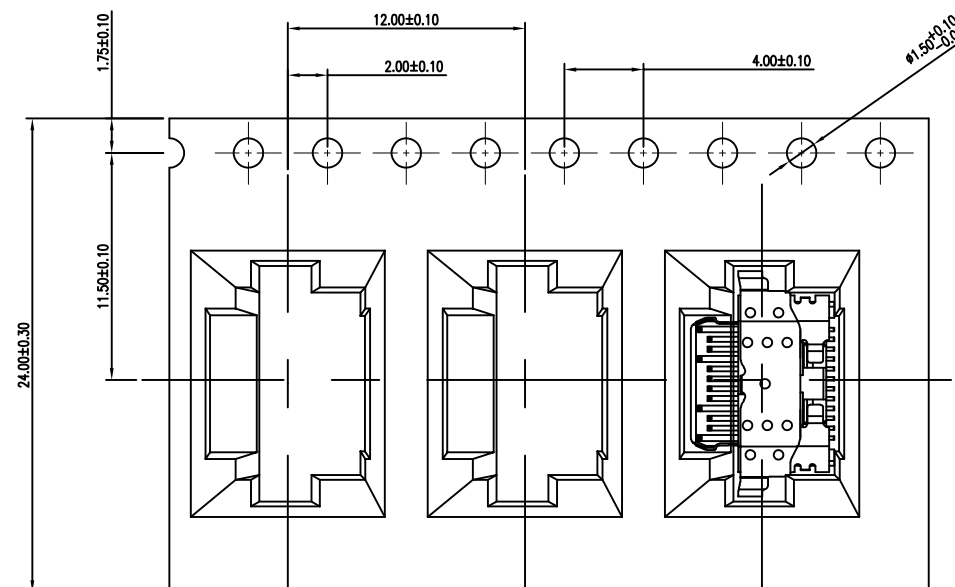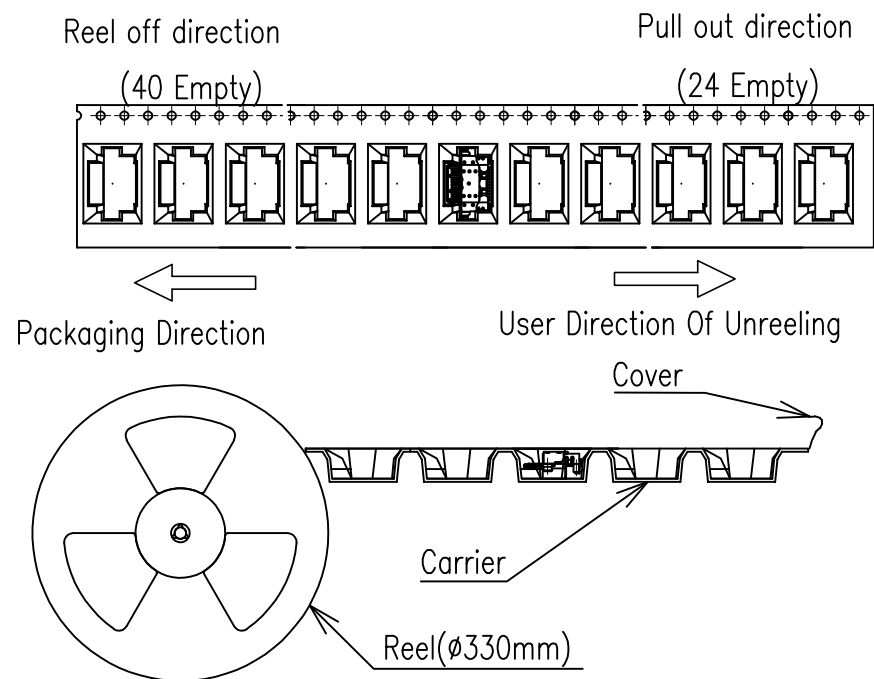

NOTES:

1. 載帶材質: PS 透明
2. 包裝內容: SEE TABLE A

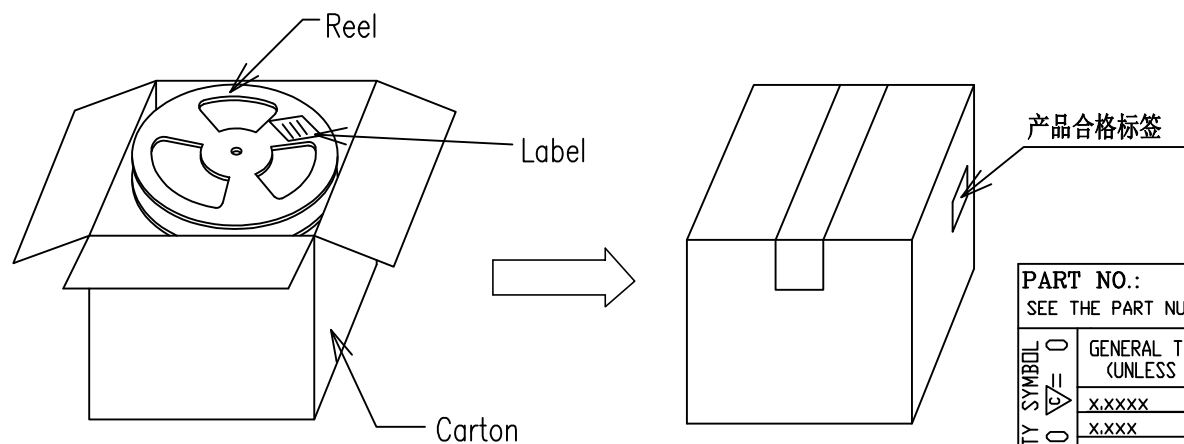


TABLE A :

PCS/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE/MM
1500	10 REEL	15000 PCS	340*340*300

PART NO.: SEE THE PART NUMBER CODE			XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			DRAWN BY SAM		DATE 2018.09.28	
QUALITY SYMBOL 0 ▽= 0									