
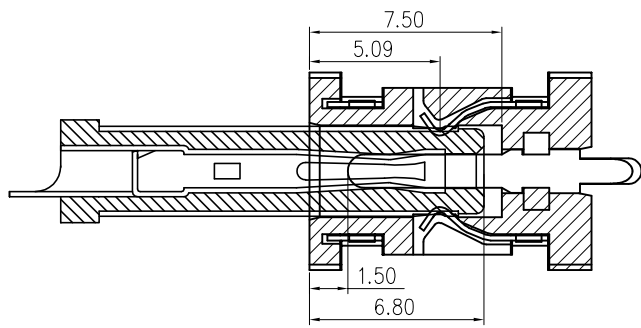
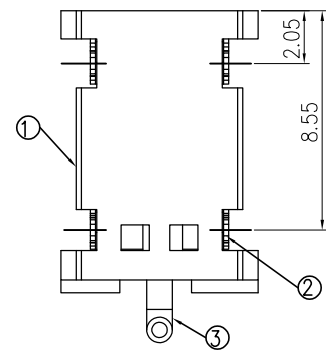
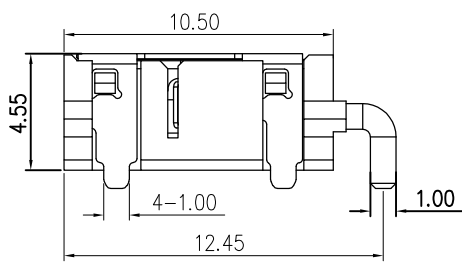




REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Kai	2018.05.11
B		UPDATE VERSION	JEFF	2022.06.11

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 24V 3A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
3. LIFE TEST: 5,000 CYCLES MIN.
4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

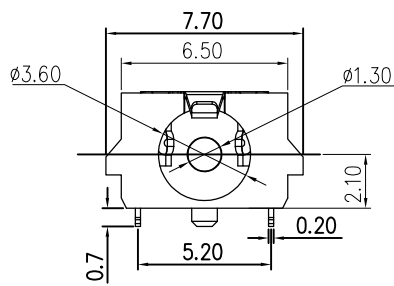

DC JACK INSERT DEPTH

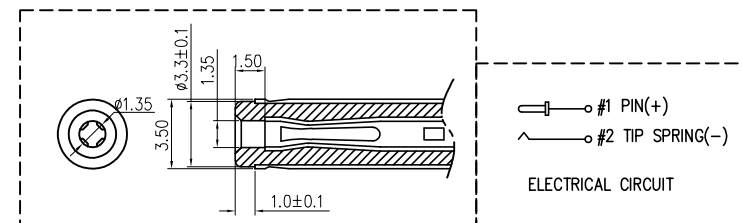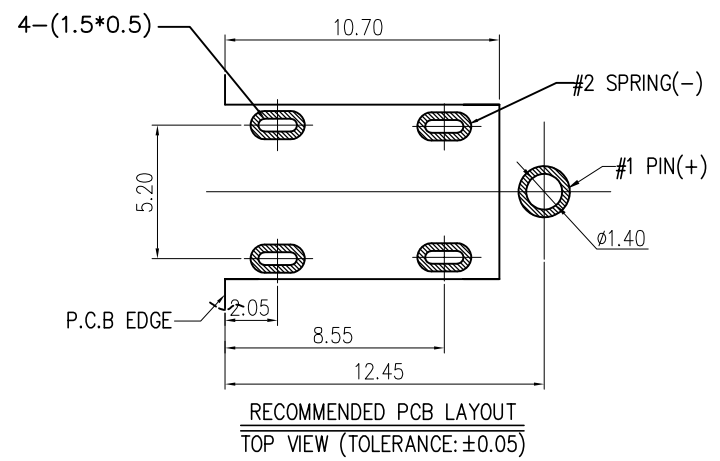

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT		OP TP IP		XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
UNLESS OTHERWISE SPECIFIED, TOLERANCE:		DESIGN:		DATE:		TITLE:	
X. ±0.50		CHECKED:		DATE:		DC POWER JACK CONNECTOR	
X.x ±0.30		APPROVED:		DATE:			
X.xx ±0.20		PART NO.		XB-DCJR0021-F02G1BR-B		REV.: B	
X.xxx ±0.10		DRAWING NO.				SCALE: 1:1	
ANGULAR ±3°						SHEET: 1/1	
						UNIT: mm	

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
3	CENTER PIN	1	BRASS;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
2	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.2
1	HOUSING	1	HIGH TEMPERATURE;COLOR BLACK	