


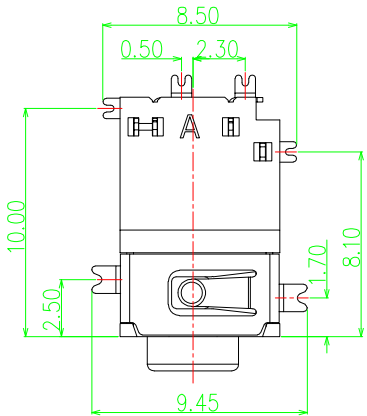
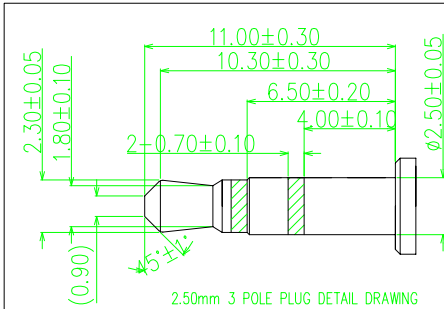
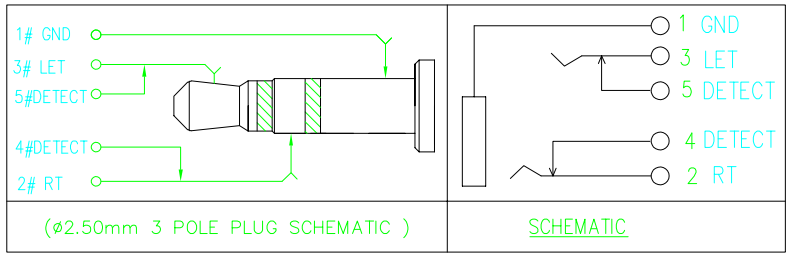
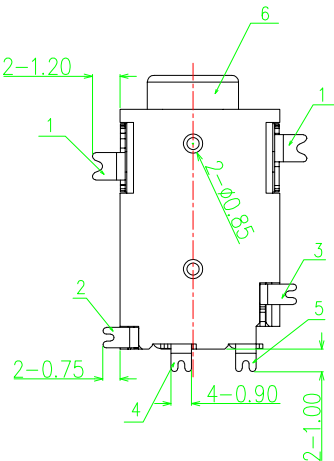
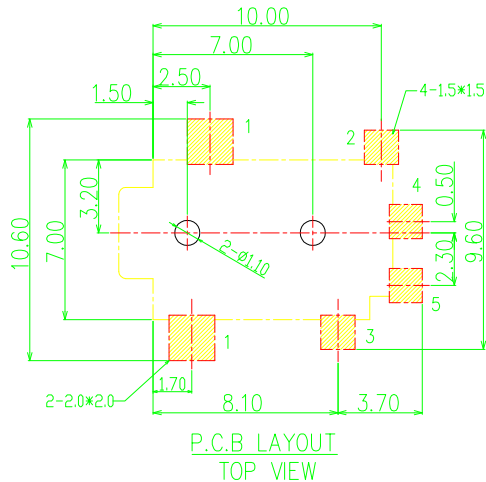



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	12/11/17

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;

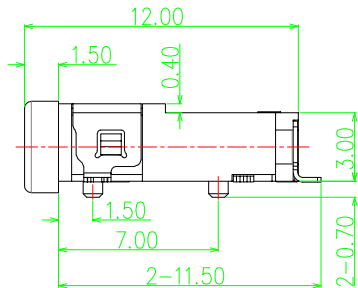

3D VIEW

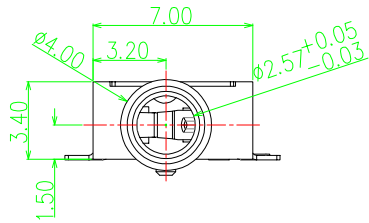

6	HOUSING	1	HIGHT TEMPERATURE PLASTIC COLOR BLACK	
5	TERMINAL 5#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
4	TERMINAL 4#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
3	TERMINAL 3#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
2	TERMINAL 2#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
1	TERMINAL 1#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING.	T=0.20mm
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
	TOL	DIM	TOL
	±0.50	X.	±2°
	±0.30	X.X	±1°
	±0.20	X.XX	
	±0.10	X.XXX	

XEB 东莞市溪榜电子有限公司		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DWG NO.		PART NAME:	ø2.5mm PHONE JACK H=3.4 mm
DESIGN:	Lucky	SMT TYPE CONNECTOR	
CHECK:		PART NO.	XB-PJ25A003-F05A5BR-A
APPROVED		REV.	A
		UNIT:	mm
		SHEET:	1/1