


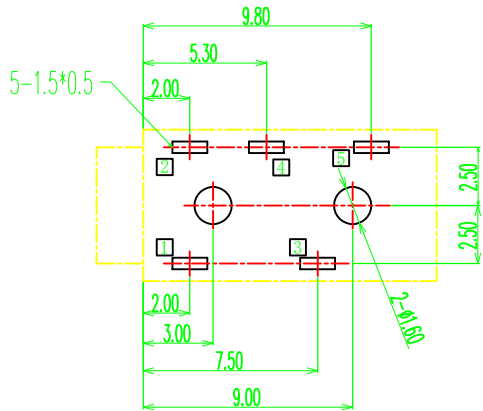


REV.		ECN. NO.	DESCRIPTION	ENG	DATE
A			INITIAL	Lucky	11 /27/'17



1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N (3Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 3N(0.3Kgf) MIN.;

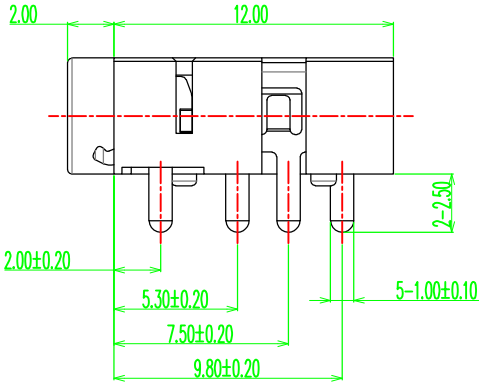


3D VIEW

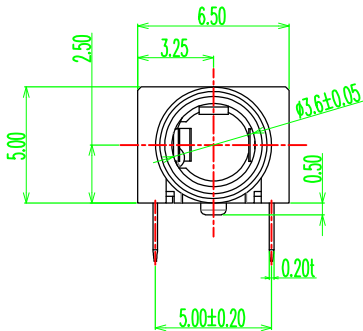

P.C.B LAYOUT
TOP VIEW

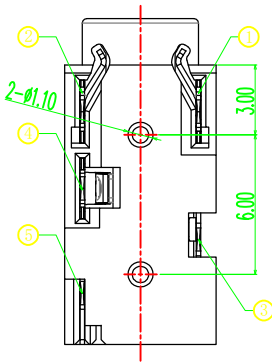

SCHEMATIC

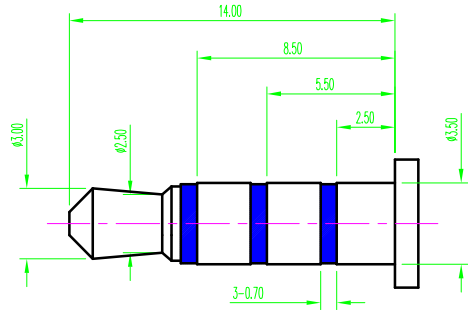

(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)

6	HOUSING	1	PPA COLOR BLACK	
5	CONTACT 5#	1	STAINLESS STEEL; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE TIN(80u"MIN.) PLATING.	T=0.2mm
4	CONTACT 4#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE TIN(80u"MIN.) PLATING.	T=0.2mm
3	CONTACT 3#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE TIN(80u"MIN.) PLATING.	T=0.2mm
2	CONTACT 2#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE TIN(80u"MIN.) PLATING.	T=0.2mm
1	CONTACT 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE TIN(80u"MIN.) PLATING.	T=0.2mm
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT		QP TP IP		XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
UNLESS OTHERWISE SPECIFIED, TOLERANCE:		DESIGN: Lucky		DATE 2017/11/27	
X. ±0.25		CHECKED		DATE	
X.x ±0.20		APPROVED		DATE	
X.xx ±0.15		PART NO. PJ35A046-F05A1BP-A		REV.: A	
X.xxx ±0.10		DRAWING NO.		SCALE: 1:1	
ANGULAR ±3°				UNIT: mm	
				SIZE: A4	
				SHEET: 1/1	
				TITLE: Ø3.5mm PHONE JACK H=5.0 mm DIP TYPE CONNECTOR	