
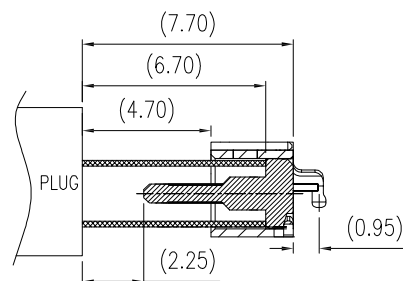






保密等级: ☐ 绝密 ☐ 保密 ☒ 普通

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED

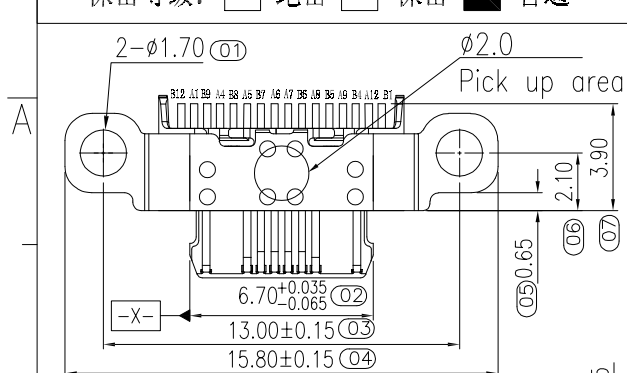

MATED CONDITION

1:1

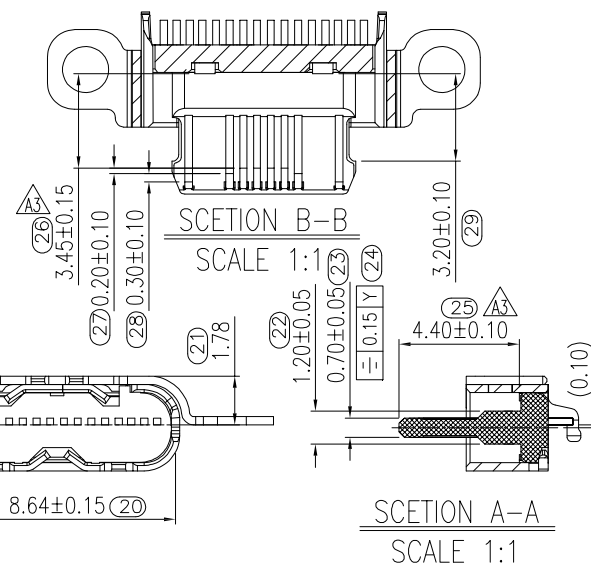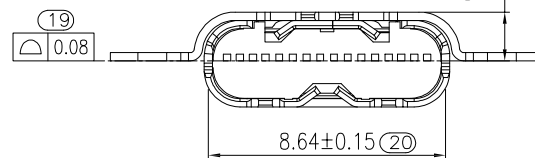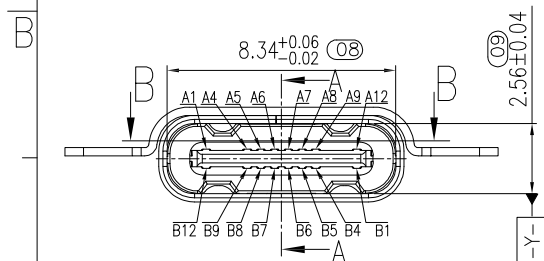

备注:

1. 规格

1.1 额定电流:

Pin A1 A12和 B1 B12 合计8A最大

Pin A4 A9和B4 B9 合计8A最大

其它Pin 0.25A最大

1.2 额定电压:30V AC

1.3 接触电阻:

初始值 40mΩ 最大

耐久后 50mΩ 最大

1.4 耐电压:100V AC 1分钟

1.5 绝缘电阻: 100M Ω 最小, 1分钟

1.6 机械性能:

拔出力 $\geq 8\text{N}$ (1000次),

 $6N(10000\text{次}) \leq 20N$



1.7 耐久: 10000次

1.8 操作温度:

-40 ° C ~ 85 ° C

1.9 盐雾:48H

2 产品必须遵守ROHS规范

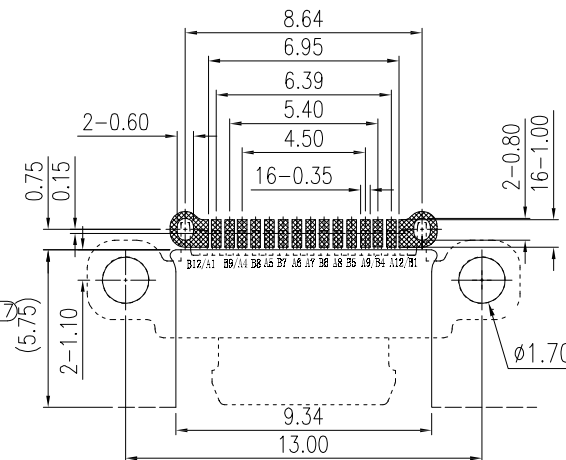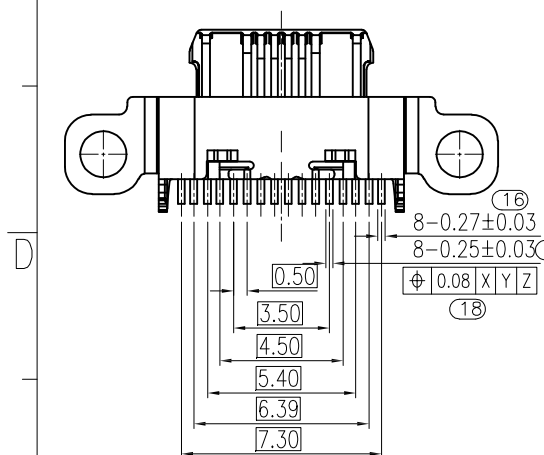

RECOMMENDED PCB LAYOUT

General Tolerance $\pm 0.05\text{mm}$

RoHS


PIN ASSIGNMENTS:

PIN	A1	A4	A5	A6	A7	A8	A9	A12
Signal Name	GND	V _{BUS}	CC1	Dp1	Dn1	SBU1	V _{BUS}	GND
PIN	B12	B9	B8	B7	B6	B5	B4	B1
Signal Name	GND	V _{BUS}	SBU2	Dn2	Dp2	CC2	V _{BUS}	GND

5	CLIP	1PCS	SUS304 T=0.30mm	50u" MIN SOLDERABLE NICKEL
4	SHELL	1PCS	SUS304 T=0.30mm	50u" MIN SOLDERABLE NICKEL
3	CONTACT	1SET	C18400 T=0.25mm	GOLD 3U" Min PLATED ON CONTACT AREA AND GOLD 1U" Min ON SOLDER TAILS OVER 50u" Min NICKEL UNDERPLATING OVERALL
2	MID—PLATE	1PCS	SUS301 T=0.20mm	NO PLATING
1	HOUSING	1PCS	PA46	BLACK COLOR, UL94 V-0
ITEM	PART NAME	Q'TY	MATERIAL	FINISH


MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.									
X° ± 2°	X° ± /	MAT'L										
.X ± 0.30	.XX ± /	SEE NOTES	PART NUMBER:	TITLE: USB2.0 Type C 16Pin CONN								
.XX ± 0.20	.XXX ± /	FINISH										
.XXX± /	.XXXX± /	SEE NOTES	APPD:	DWG NO.: Pro16P								
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XIE ZHAN Electronics COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XIE ZHAN Electronics		QTY	CHKD:	 <table><tr><th>SCALE</th><th>SHEET</th><th>REV.</th></tr><tr><td>1:1</td><td>1/1</td><td>A1</td></tr></table>			SCALE	SHEET	REV.	1:1	1/1	A1
		SCALE	SHEET				REV.					
1:1	1/1	A1										
SEE NOTES	DR:											

保密等级: ☐ 绝密 ☐ 保密 ☒ 普通

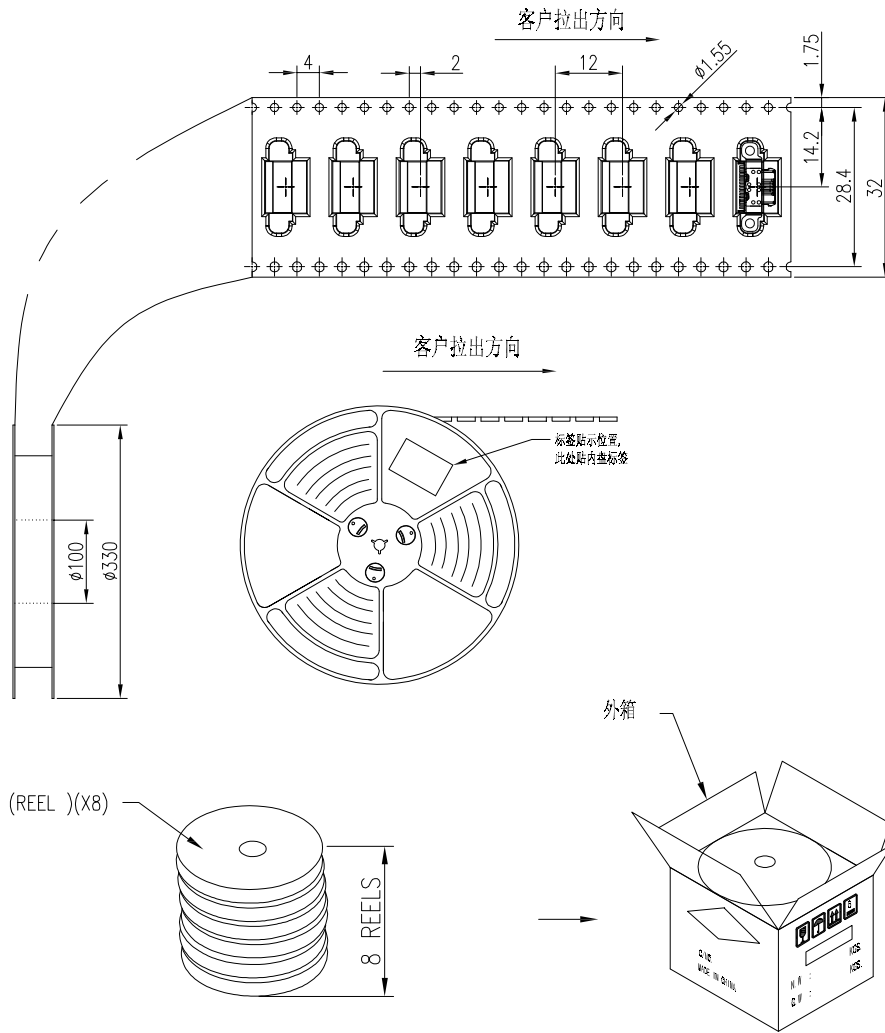

NOTES

1. 每卷满装:1500PCS;
2. 包装方式如下:

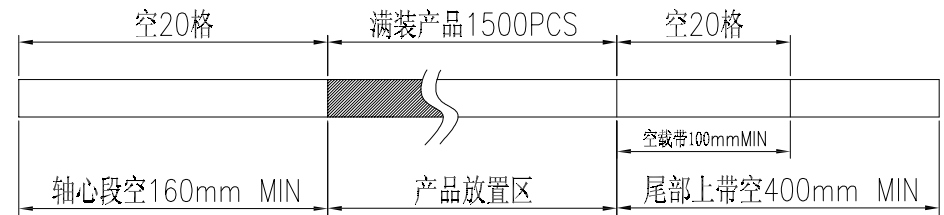

3. 满箱包装数量: 12000PCS;
4. LOT号的管控按LOT管理规定执行;
5. 标识、标签依据及其它包装要求, 参照对应客户的包装规范执行。



MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
		MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± /	MAT'L	PART NUMBER:		TITLE:	
.X ± 0.20	.XX ± /	SEE NOTES	151724048		USB2.0 Type C 16Pin Connector	
.XX ± 0.15	.XXX ± /	FINISH	APPD:		DWG NO.:	
.XXX ± /	.XXXX ± /	SEE NOTES	CHKD:		MEIZU Pro16P-2	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XIE ZHAN Electronics. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XIE ZHAN Electronics			DR:		SCALE	
			1:1		SHEET	
					REV.	
					A3	