



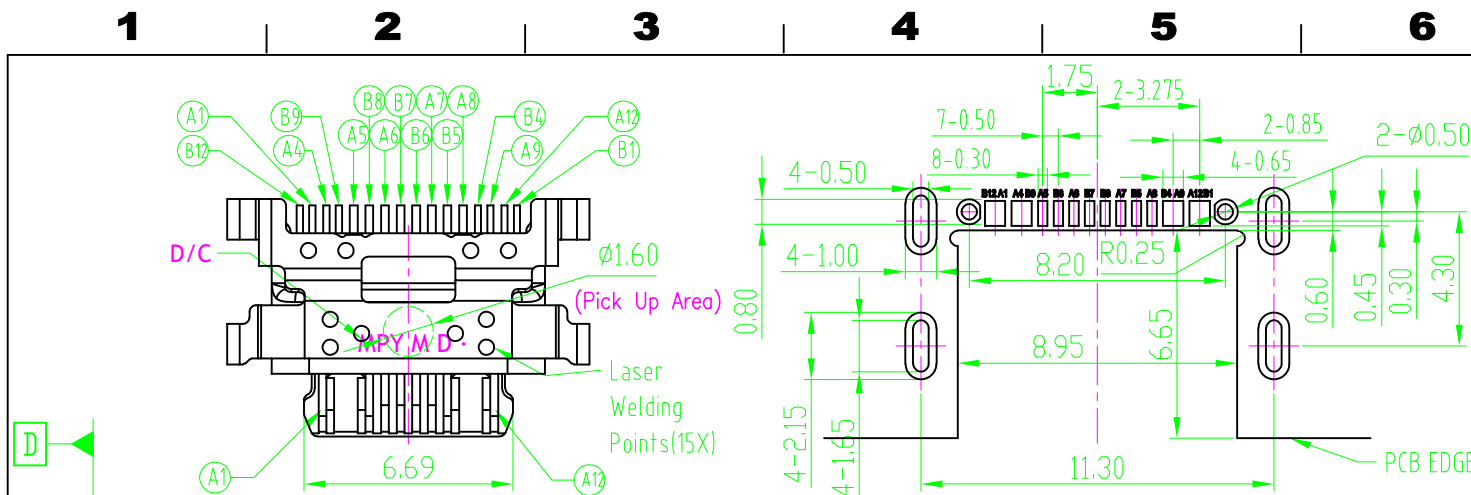


REV.	EC#	DESCRIPTION	DATE	APPROVED
A		新版发行	2020.04.10	

NOTES:

SPECIFICATION:



1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

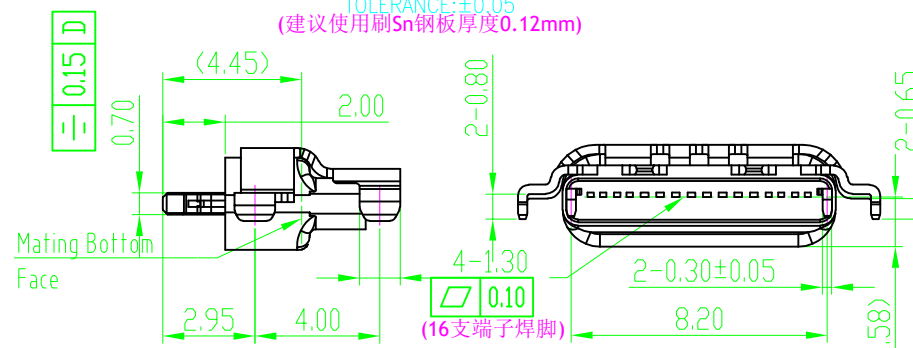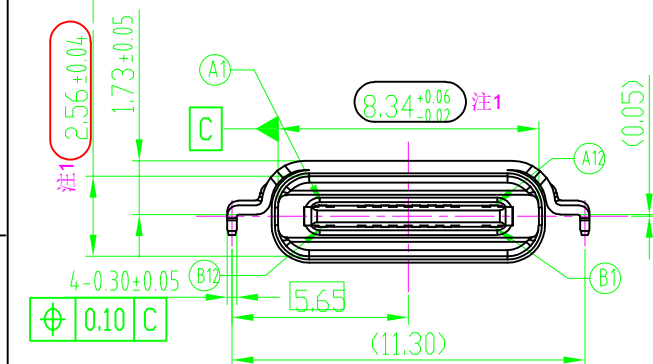

Pin Assignments

Contact Number	Signal Name	Contact Number	Signal Name
A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
8	TOP SHELL	STAINLESS STEEL	Ti/Ni Plated	1PCS
7	SHELL	STAINLESS STEEL	Ni Plated	1PCS
6	OVER MOLDING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
5	TOP I/M	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
4	BOTTOM I/M	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	MID PLATE	STAINLESS STEEL	Ti/Ni Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET

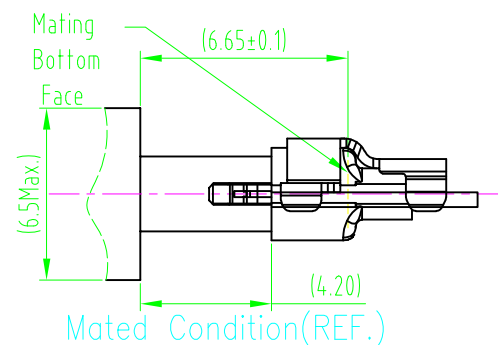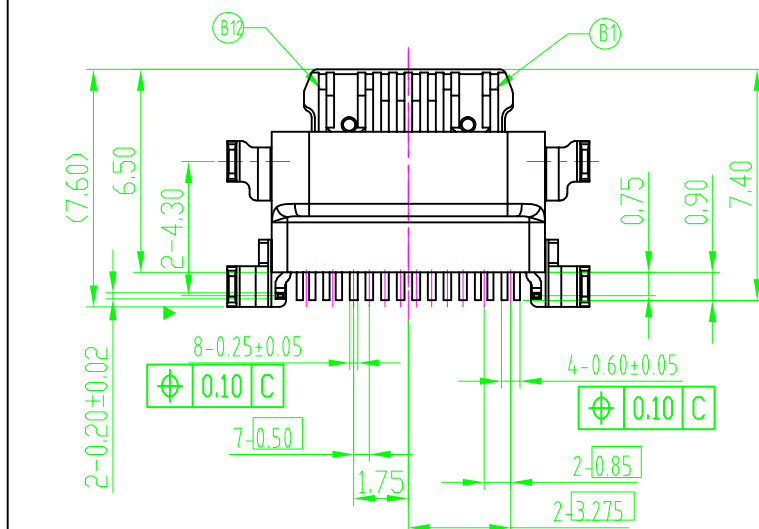

Mated Condition(REF.)

注1: “ ”表示CPK尺寸

TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NUMBER:	
GENERAL	X ±0.38 X ±0.25 XX ±0.15 XXX ±0.05	APPROVED	DATE
ANGLES	X° ±3.0° X° ±2.0° XX° ±1.0°	CHECKED	DATE
SCALE		DESIGN	DATE
SHEET 1 OF 1		DATE	2020.04.10
UNIT	mm	REV	A

XIBANG 东莞市溪榜电子有限公司	
DONGGUAN XIBANG ELECTRONICS CO., LTD.	
TITLE Customer Drawing for USB Type-C 母 16pin 沉板1.58 防水型(外露2.0) 成品	
SERIES Red Mi K30	SIZE A4
DATE	REV