

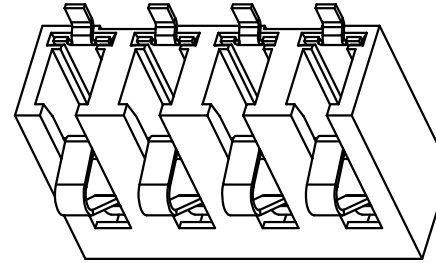






REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A	XXXXXXX	INITIAL	Kai	2017.08.03

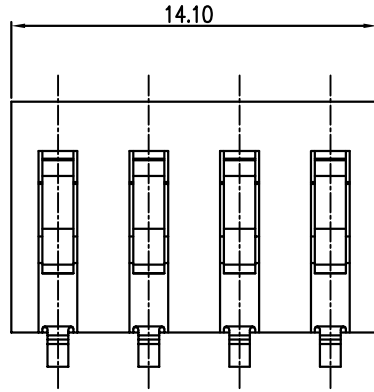

3D VIEW

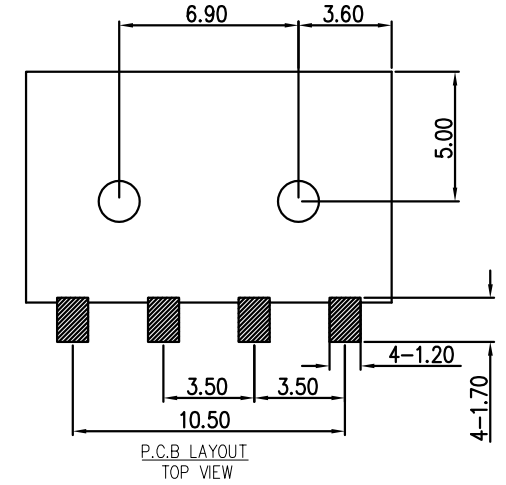

P.C.B. LAYOUT
TOP VIEW

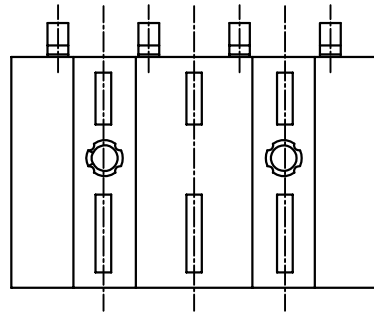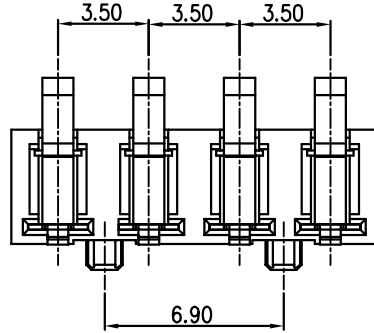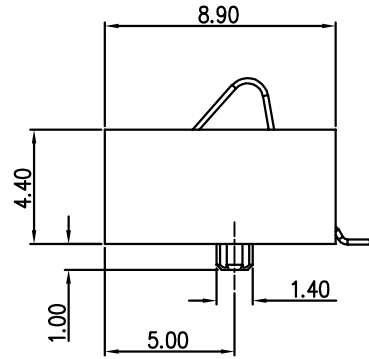

NOTES:

- 1 Rated current: 0.5A
- 2 Rated voltage: 30V
- 3 Contact Resistance: 50mΩ MAX
- 4 Insulation Resistance: 100MΩ MIN 100V DC
- 5 Dielectric withstanding voltage: 100V AC.
- 6 Durability: 5000 Cycles Min.

ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
②	HOUSING	1	HIGHT TEMPERATURE PLASTIC		BLACK
①	CONTACT A	1	PHOSPHOR BRONZE 0.20T	Au PLATED	

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	±0.5°
X.XXX	±0.10	X.XXX	±0.2°



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DWG NO.	Q/XM-CP-RD-0020	PART NAME:	BATTERY 4PIN PH:5.0mm SMT TYPE
DESIGN:		PART NO.	XB-BTJR0002-F04J1HR-A
CHECK:		REV.	A
APPROVED		UNIT:	mm
		SHEET:	1/1