

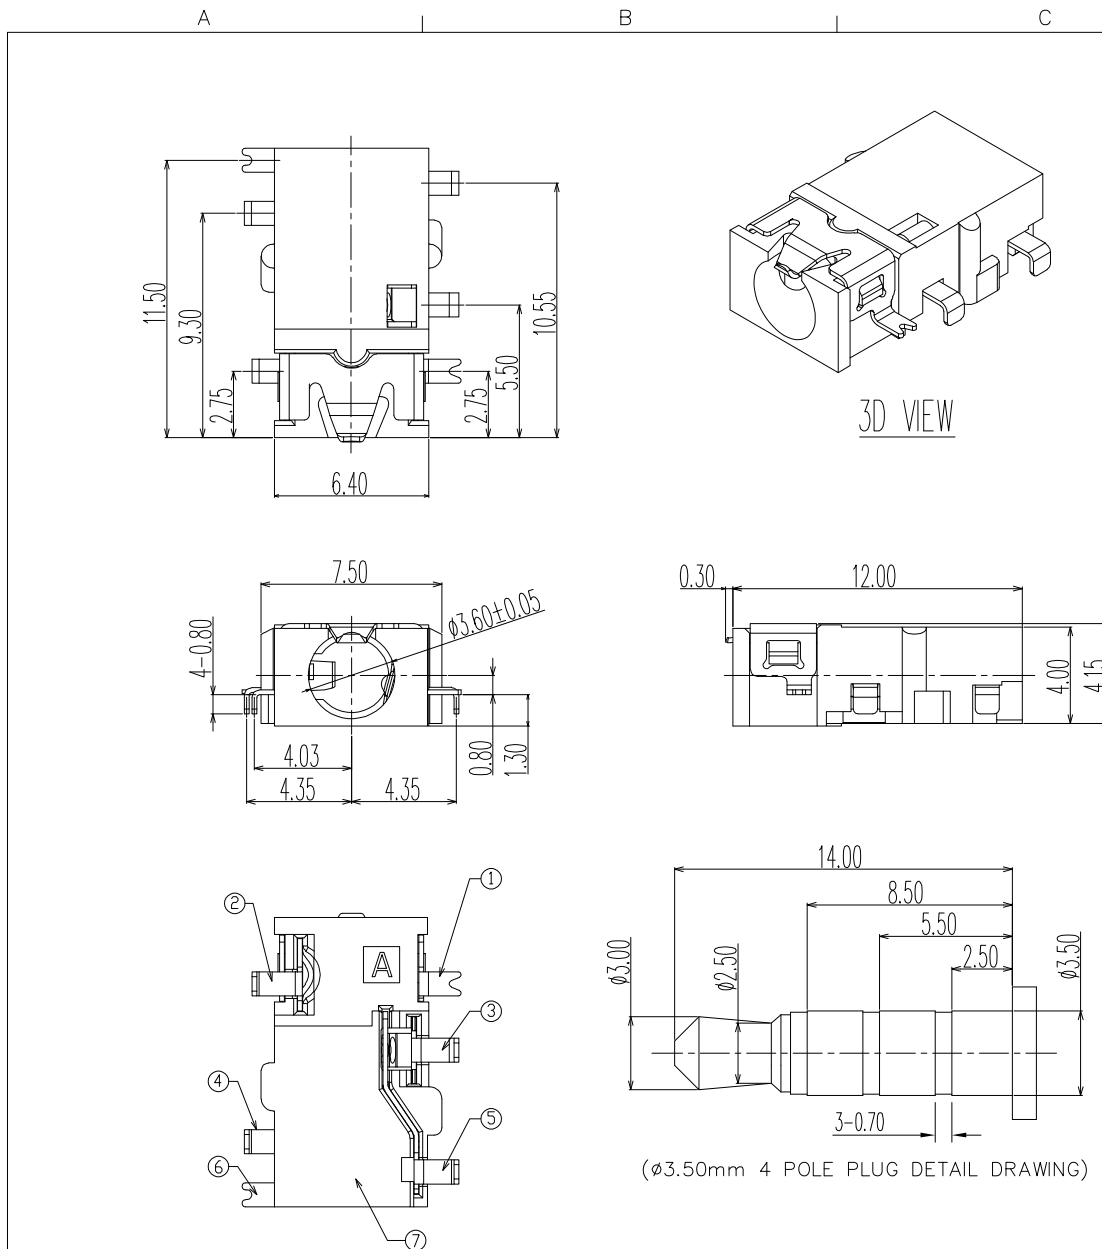


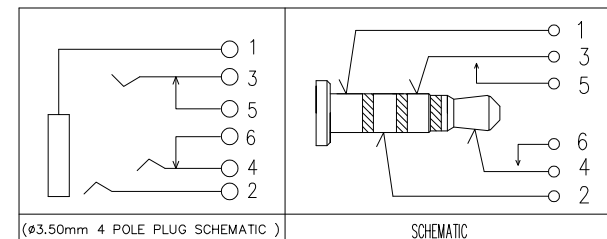

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	2018.02.03

- NOTES:
- CONTACT CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 150 mΩ MAX.;
 - INSULATION RESISTANCE: 1000MΩ MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 30N MAX.;
 - CONNECTOR UNMATING FORCES: 3N MIN.;

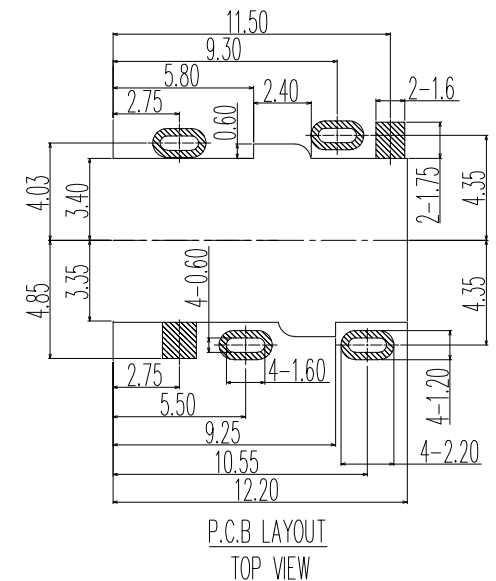

⑦	HOUSING	1	HIGH TEMPERATURE; COLOR BLACK	
⑥	CONTACT 6#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL, GOLD FLASH ON SOLDER AREA	T=0.2
⑤	CONTACT 5#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL, GOLD FLASH ON SOLDER AREA	T=0.2
④	CONTACT 4#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.2
③	CONTACT 3#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.2
②	CONTACT 2#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.2
①	CONTACT 1#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL, GOLD FLASH ON OVERALL;	T=0.2
ITEM	PART NAME	Q'TY	MATERIAL	REMARK

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

QP
TP
IP

UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X. ±0.30
X.x ±0.25
X.xx ±0.20
X.xxx ±0.10
ANGULAR ±3°

DESIGN: Lucky

CHECKED

APPROVED

PART NO. XB-PJ35A013-F06G1BR-A

DRAWING NO.

DATE 2018.02.03

DATE

DATE

TITLE:
Ø3.5 PHONE JACK CONNECTOR

REV.: A

SCALE: 1:1

UNIT: mm

SIZE: A4

SHEET: 1/1

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.