
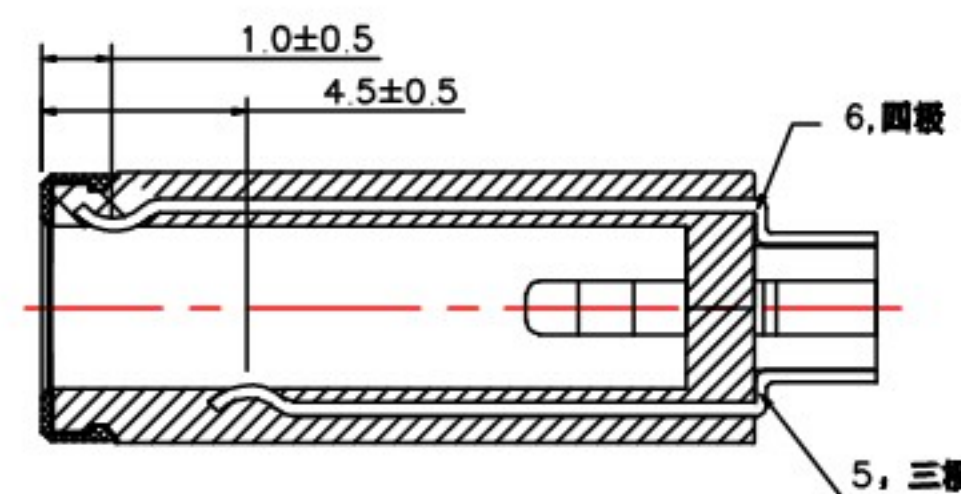
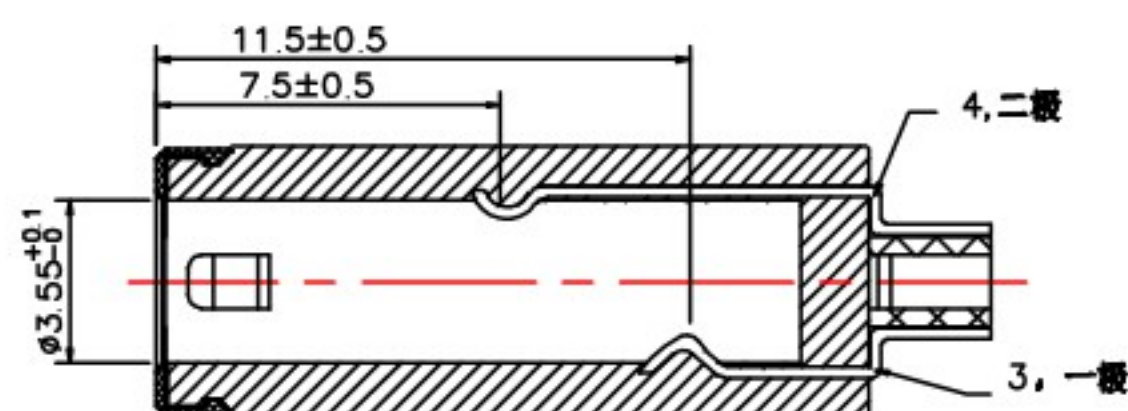
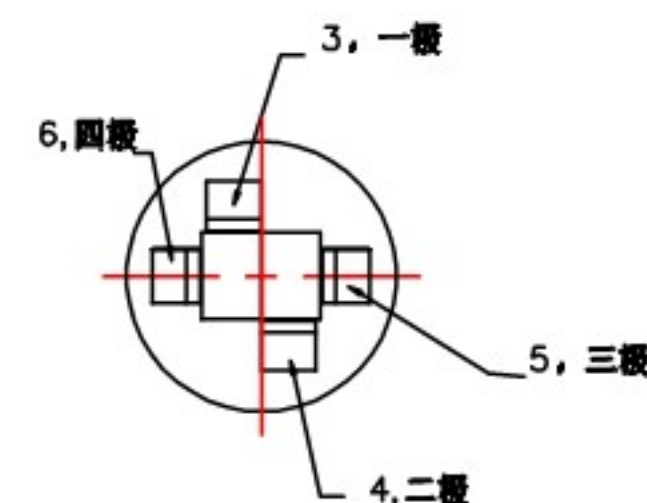


ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20181018

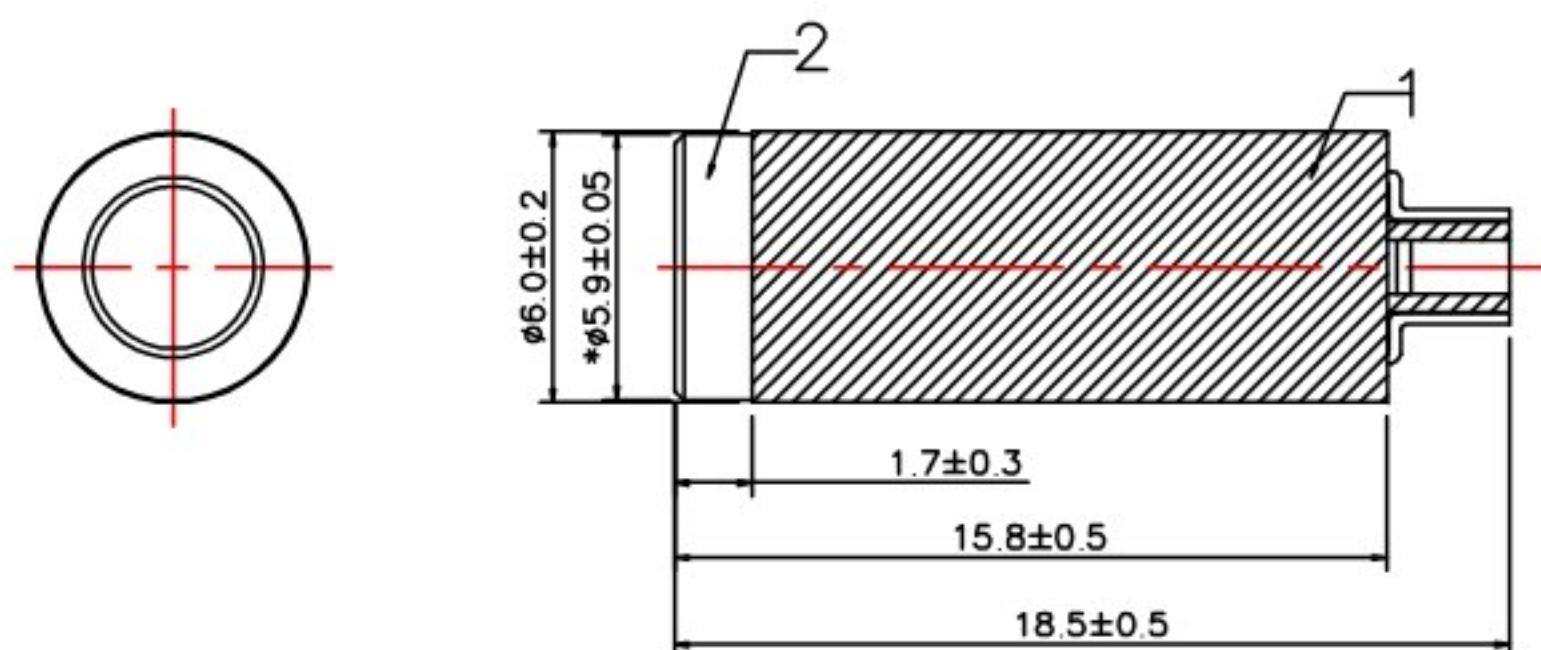

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c>Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:4—40N.
- 4.Salt spray test:48H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7			
比例 Scale	5:1		6	第四级	BRONZE(C5191)	Ni 80-150μ"
视图 Third angle projection		xx:±0.3	5	第三级	BRONZE(C5191)	Ni80μ" Au0.8μ"
			4	第二级	BRONZE(C5191)	Ni 80-150μ"
		x.x:±0.1	3	第一级	BRONZE(C5191)	Ni80μ" Au0.8μ"
			2	铜扣	BRASS(C3604)	Ni80μ" Au1μ"
			1	PLASTIC	POM	BLACK
		xx:±0.05	NO.	PART	MATERIAL	PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	苏伟伦

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	3.5 AUDIO JACK Ø3.5*Ø5.9*18.5
品名 P/N:	J354SJ59G封闭式
图号 DRAWN NO:	CP-06-0230