


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20211025
V2.0	△	ø4.0圆形胶套	ø4.0圆形胶套 增加4个压线槽	June	20211214

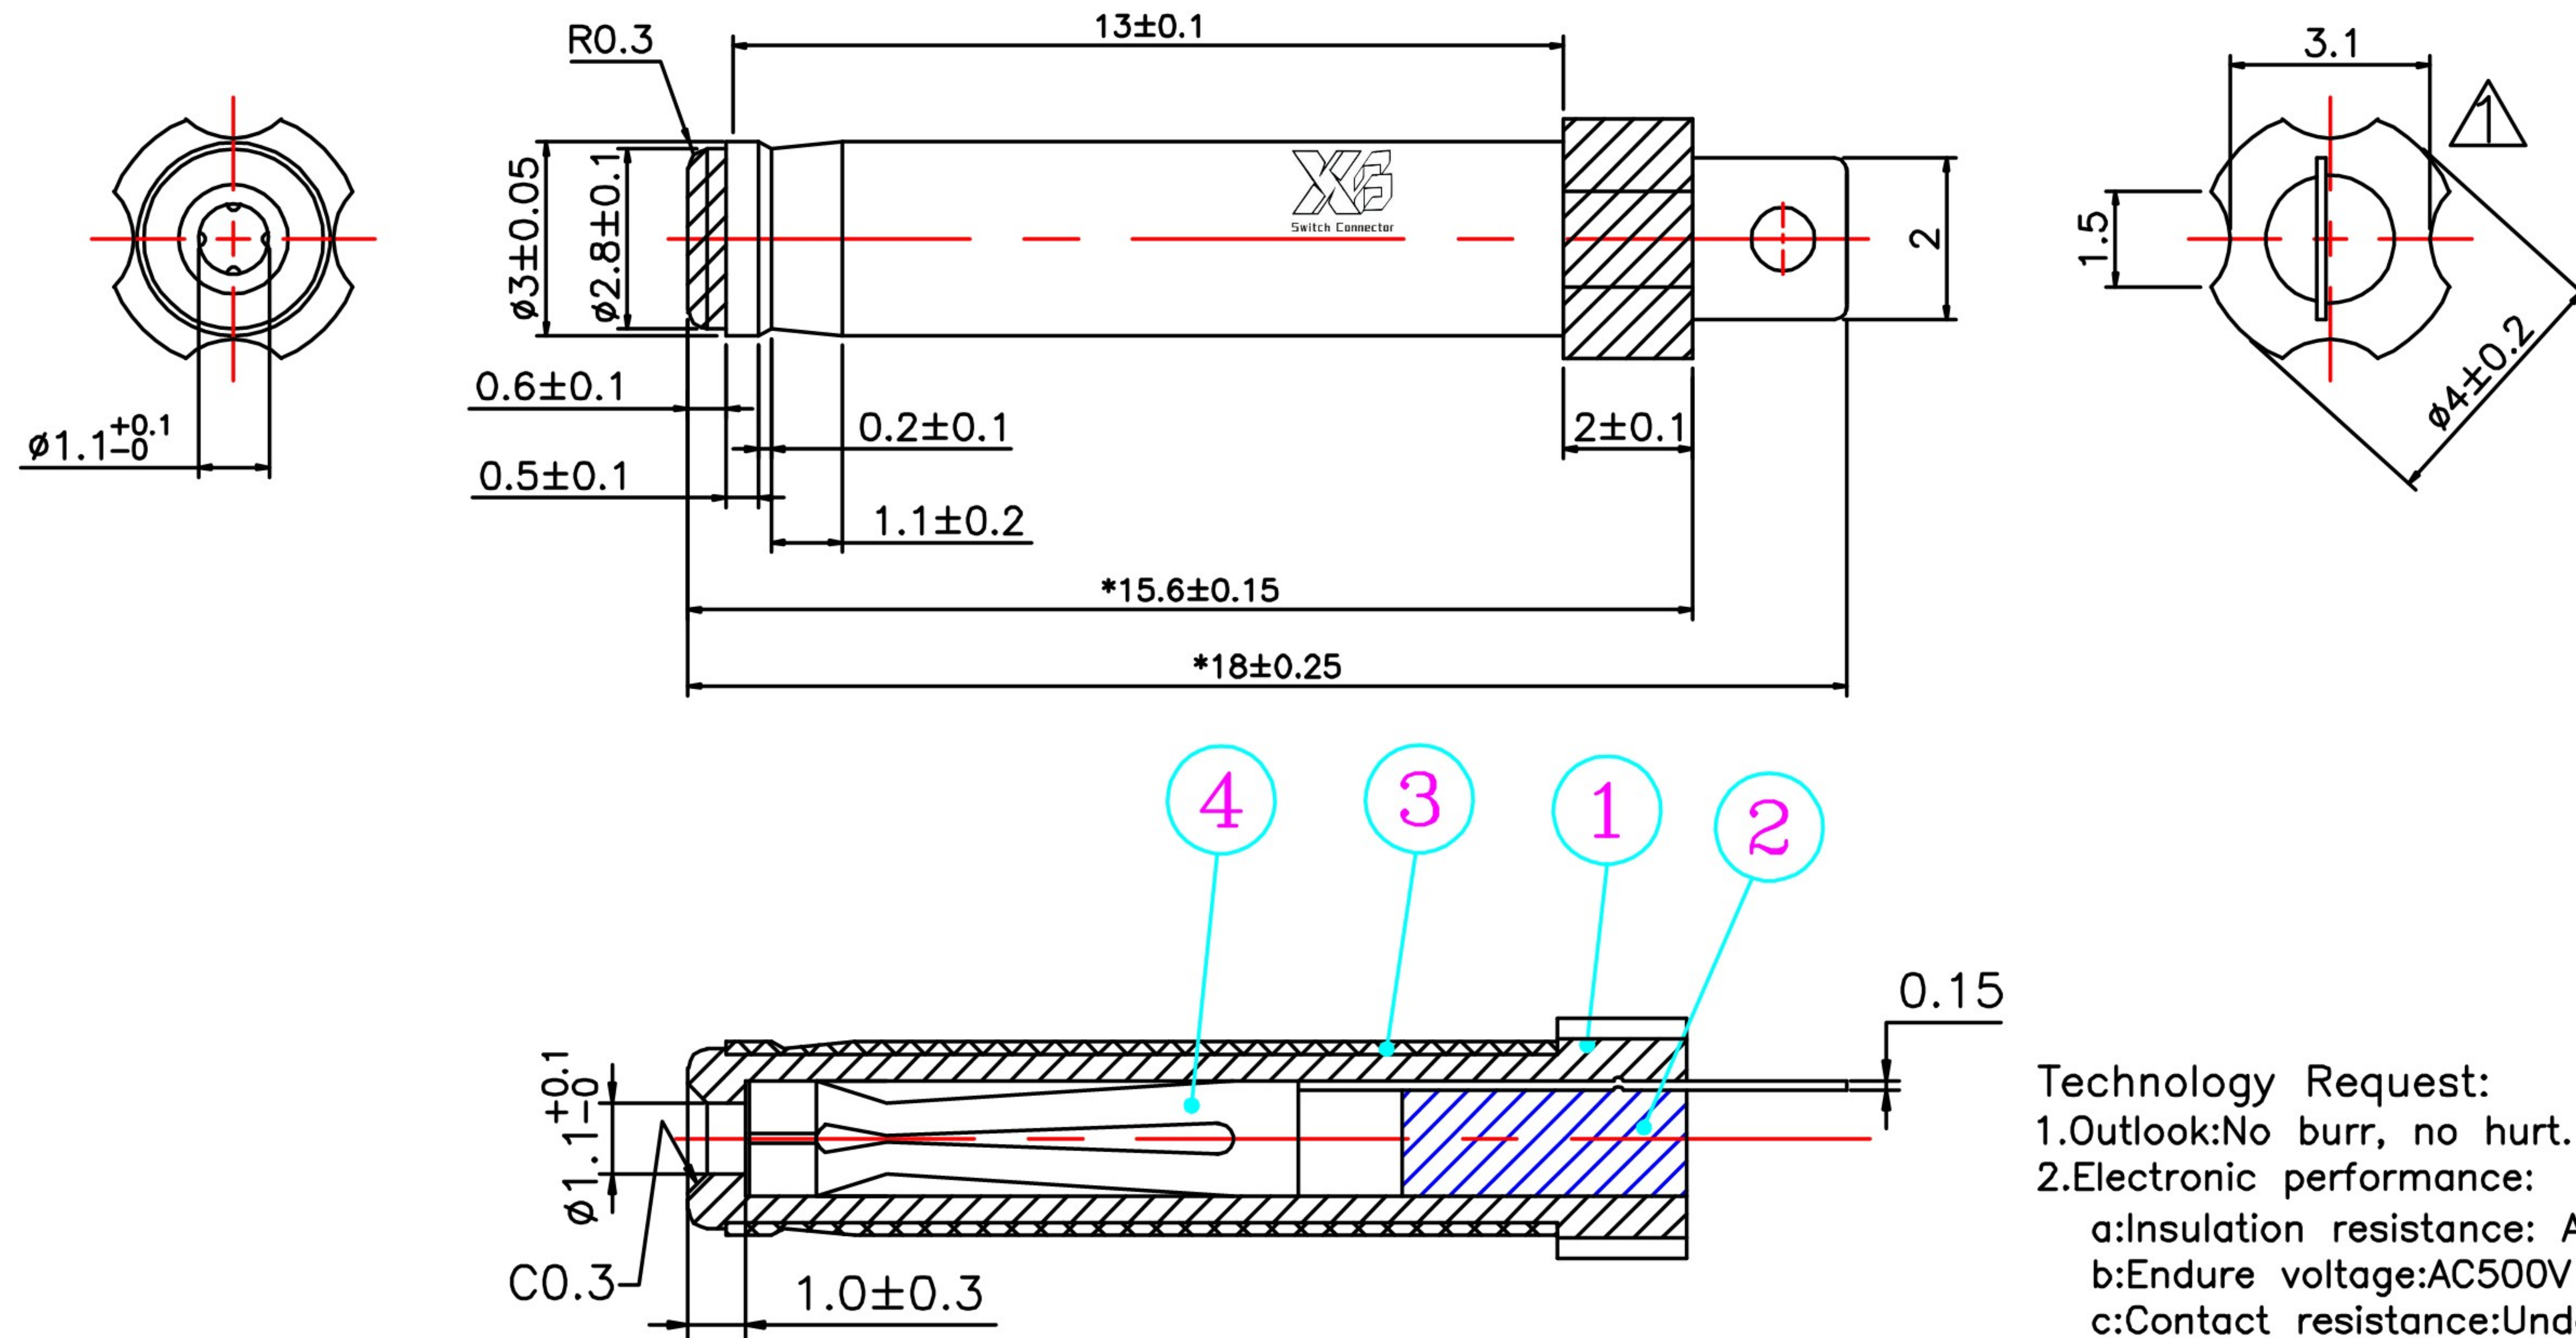

Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:Insulation resistance: Above DC500V/100MΩ;
b:Endure voltage:AC500V at 1 minute;
c:Contact resistance:Under 30mΩ;
3.Insertion force & withdrawal force:0.3–3kgf.
4.Salt spray test:48H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
比例 Scale	5:1	xx.:±0.3	6							
视图 Third angle projection		x.x:±0.1	5							
		.xx:±0.05	4	连接端子	C5191	Sn 1~3um				
			3	外管	H65	Ni 1~3um				
			2	PLASTIC	POM	BLACK	June	杨义邦	苏伟伦	
			1	PLASTIC	PA66	BLACK				
			NO.	PART	MATERIAL	PLATING				